

# HiPerFET™

## Power MOSFETs


IXFK / IXFN 44 N50  
IXFK / IXFN 48 N50

N-Channel Enhancement Mode  
Avalanche Rated, High dv/dt, Low  $t_{rr}$


| $V_{DSS}$            | $I_{D25}$ | $R_{DS(on)}$  |
|----------------------|-----------|---------------|
| 500 V                | 44 A      | 0.12 $\Omega$ |
| 500 V                | 48 A      | 0.10 $\Omega$ |
| $t_{rr} \leq 250$ ns |           |               |

| Symbol     | Test Conditions                                                                                                                      | Maximum Ratings |          |                  |
|------------|--------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------|------------------|
|            |                                                                                                                                      | IXFK            | IXFN     |                  |
| $V_{DSS}$  | $T_J = 25^\circ\text{C}$ to $150^\circ\text{C}$                                                                                      | 500             | 500      | V                |
| $V_{DGR}$  | $T_J = 25^\circ\text{C}$ to $150^\circ\text{C}$ ; $R_{GS} = 1$ M $\Omega$                                                            | 500             | 500      | V                |
| $V_{GS}$   | Continuous                                                                                                                           | $\pm 20$        | $\pm 20$ | V                |
| $V_{GSM}$  | Transient                                                                                                                            | $\pm 30$        | $\pm 30$ | V                |
| $I_{D25}$  | $T_C = 25^\circ\text{C}$                                                                                                             | 44N50           | 44       | A                |
|            |                                                                                                                                      | 48N50           | 48       | A                |
| $I_{DM}$   | $T_C = 25^\circ\text{C}$ ,<br>pulse width limited by $T_{JM}$                                                                        | 44N50           | 176      | A                |
|            |                                                                                                                                      | 48N50           | 192      | A                |
| $I_{AR}$   | $T_C = 25^\circ\text{C}$                                                                                                             | 24              | 24       | A                |
| $E_{AR}$   | $T_C = 25^\circ\text{C}$                                                                                                             | 30              | 30       | mJ               |
| dv/dt      | $I_S \leq I_{DM}$ , di/dt $\leq 100$ A/ $\mu\text{s}$ , $V_{DD} \leq V_{DSS}$ ,<br>$T_J \leq 150^\circ\text{C}$ , $R_G = 2$ $\Omega$ | 5               | 5        | V/ns             |
| $P_D$      | $T_C = 25^\circ\text{C}$                                                                                                             | 500             | 520      | W                |
| $T_J$      |                                                                                                                                      | -55 ... +150    |          | $^\circ\text{C}$ |
| $T_{JM}$   |                                                                                                                                      | 150             |          | $^\circ\text{C}$ |
| $T_{stg}$  |                                                                                                                                      | -55 ... +150    |          | $^\circ\text{C}$ |
| $T_L$      | 1.6 mm (0.063 in) from case for 10 s                                                                                                 | 300             | -        | $^\circ\text{C}$ |
|            |                                                                                                                                      |                 |          |                  |
| $V_{ISOL}$ | 50/60 Hz, RMS $t = 1$ min                                                                                                            | -               | 2500     | V~               |
|            | $I_{ISOL} \leq 1$ mA $t = 1$ s                                                                                                       | -               | 3000     | V~               |
| $M_d$      | Mounting torque                                                                                                                      | 0.9/6           | 1.5/13   | Nm/lb.in.        |
|            | Terminal connection torque                                                                                                           | -               | 1.5/13   | Nm/lb.in.        |
| Weight     |                                                                                                                                      | 10              | 30       | g                |

| Symbol              | Test Conditions                                                 | Characteristic Values<br>(T <sub>J</sub> = 25°C, unless otherwise specified) |      |         |
|---------------------|-----------------------------------------------------------------|------------------------------------------------------------------------------|------|---------|
|                     |                                                                 | min.                                                                         | typ. | max.    |
| V <sub>DSS</sub>    | V <sub>GS</sub> = 0 V, I <sub>D</sub> = 1 mA                    | 500                                                                          |      | V       |
| V <sub>GS(th)</sub> | V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 8 mA       | 2                                                                            |      | V       |
| I <sub>GSS</sub>    | V <sub>GS</sub> = ±20 V <sub>DC</sub> , V <sub>DS</sub> = 0     |                                                                              |      | ±200 nA |
| I <sub>DSS</sub>    | V <sub>DS</sub> = 0.8 • V <sub>DSS</sub>                        | T <sub>J</sub> = 25°C                                                        |      | 400 μA  |
|                     | V <sub>GS</sub> = 0 V                                           | T <sub>J</sub> = 125°C                                                       |      | 2 mA    |
| R <sub>DS(on)</sub> | V <sub>GS</sub> = 10 V, I <sub>D</sub> = 0.5 • I <sub>D25</sub> | 44N50                                                                        |      | 0.12 Ω  |
|                     |                                                                 | 48N50                                                                        |      | 0.10 Ω  |
|                     | Pulse test, t ≤ 300 μs, duty cycle d ≤ 2 %                      |                                                                              |      |         |

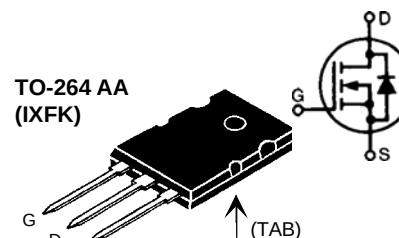

miniBLOC, SOT-227 B (IXFN)

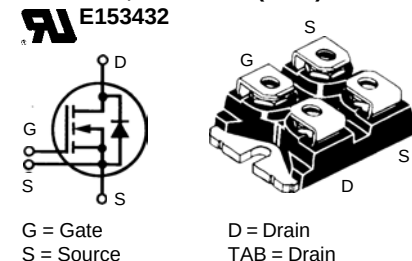

Either Source terminal at miniBLOC can be used as Main or Kelvin Source

### Features

- International standard packages
- Molding epoxies meet UL 94 V-0 flammability classification
- SOT-227B miniBLOC with aluminium nitride isolation
- Low  $R_{DS(on)}$  HDMOS™ process
- Unclamped Inductive Switching (UIS) rated
- Fast intrinsic rectifier

### Applications

- DC-DC converters
- Synchronous rectification
- Battery chargers
- Switched-mode and resonant-mode power supplies
- DC choppers
- Temperature and lighting controls


### Advantages

- Easy to mount
- Space savings
- High power density

| Symbol                                        | Test Conditions                                                                                              | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |                       |                      |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------|----------------------|
|                                               |                                                                                                              | min.                                                                              | typ.                  | max.                 |
| $g_{fs}$                                      | $V_{DS} = 10\text{ V}; I_D = 0.5 \cdot I_{D25}$ , pulse test                                                 | 22                                                                                | 42                    | S                    |
| $C_{iss}$<br>$C_{oss}$<br>$C_{rss}$           | $V_{GS} = 0\text{ V}, V_{DS} = 25\text{ V}, f = 1\text{ MHz}$                                                |                                                                                   | 8400<br>900<br>280    | pF<br>pF<br>pF       |
| $t_{d(on)}$<br>$t_r$<br>$t_{d(off)}$<br>$t_f$ | $V_{GS} = 10\text{ V}, V_{DS} = 0.5 \cdot V_{DSS}, I_D = 0.5 \cdot I_{D25}$<br>$R_G = 1\ \Omega$ (External), |                                                                                   | 30<br>60<br>100<br>30 | ns<br>ns<br>ns<br>ns |
| $Q_{g(on)}$<br>$Q_{gs}$<br>$Q_{gd}$           | $V_{GS} = 10\text{ V}, V_{DS} = 0.5 \cdot V_{DSS}, I_D = 0.5 \cdot I_{D25}$                                  |                                                                                   | 270<br>60<br>135      | nC<br>nC<br>nC       |
| $R_{thJC}$<br>$R_{thCK}$                      | TO-264 AA<br>TO-264 AA                                                                                       |                                                                                   | 0.15                  | 0.25 K/W<br>K/W      |
| $R_{thJC}$<br>$R_{thCK}$                      | miniBLOC, SOT-227 B<br>miniBLOC, SOT-227 B                                                                   |                                                                                   | 0.05                  | 0.24 K/W<br>K/W      |


| Symbol                           | Test Conditions                                                                                                | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |           |                              |
|----------------------------------|----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------|------------------------------|
|                                  |                                                                                                                | min.                                                                              | typ.      | max.                         |
| $I_S$                            | $V_{GS} = 0\text{ V}$                                                                                          |                                                                                   |           | 48 A                         |
| $I_{SM}$                         | Repetitive; pulse width limited by $T_{JM}$                                                                    |                                                                                   |           | 192 A                        |
| $V_{SD}$                         | $I_F = 100\text{ A}, V_{GS} = 0\text{ V}$ ,<br>Pulse test, $t \leq 300\ \mu\text{s}$ , duty cycle $d \leq 2\%$ |                                                                                   |           | 1.5 V                        |
| $t_{rr}$<br>$Q_{RM}$<br>$I_{RM}$ | $I_F = I_S, -di/dt = 100\text{ A}/\mu\text{s}, V_R = 100\text{ V}$                                             |                                                                                   | TBD<br>20 | 250 ns<br>$\mu\text{C}$<br>A |

## TO-264 AA Outline



| Dim. | Millimeter<br>Min. Max. | Inches<br>Min. Max. |
|------|-------------------------|---------------------|
| A    | 4.82 5.13               | .190 .202           |
| A1   | 2.54 2.89               | .100 .114           |
| A2   | 2.00 2.10               | .079 .083           |
| b    | 1.12 1.42               | .044 .056           |
| b1   | 2.39 2.69               | .094 .106           |
| b2   | 2.90 3.09               | .114 .122           |
| c    | 0.53 0.83               | .021 .033           |
| D    | 25.91 26.16             | 1.020 1.030         |
| E    | 19.81 19.96             | .780 .786           |
| e    | 5.46 BSC                | .215 BSC            |
| J    | 0.00 0.25               | .000 .010           |
| K    | 0.00 0.25               | .000 .010           |
| L    | 20.32 20.83             | .800 .820           |
| L1   | 2.29 2.59               | .090 .102           |
| P    | 3.17 3.66               | .125 .144           |
| Q    | 6.07 6.27               | .239 .247           |
| Q1   | 8.38 8.69               | .330 .342           |
| R    | 3.81 4.32               | .150 .170           |
| R1   | 1.78 2.29               | .070 .090           |
| S    | 6.04 6.30               | .238 .248           |
| T    | 1.57 1.83               | .062 .072           |

## miniBLOC, SOT-227 B



M4 screws (4x) supplied

| Dim. | Millimeter<br>Min. Max. | Inches<br>Min. Max. |
|------|-------------------------|---------------------|
| A    | 31.50 31.88             | 1.240 1.255         |
| B    | 7.80 8.20               | 0.307 0.323         |
| C    | 4.09 4.29               | 0.161 0.169         |
| D    | 4.09 4.29               | 0.161 0.169         |
| E    | 4.09 4.29               | 0.161 0.169         |
| F    | 14.91 15.11             | 0.587 0.595         |
| G    | 30.12 30.30             | 1.186 1.193         |
| H    | 38.00 38.23             | 1.496 1.505         |
| J    | 11.68 12.22             | 0.460 0.481         |
| K    | 8.92 9.60               | 0.351 0.378         |
| L    | 0.76 0.84               | 0.030 0.033         |
| M    | 12.60 12.85             | 0.496 0.506         |
| N    | 25.15 25.42             | 0.990 1.001         |
| O    | 1.98 2.13               | 0.078 0.084         |
| P    | 4.95 5.97               | 0.195 0.235         |
| Q    | 26.54 26.90             | 1.045 1.059         |
| R    | 3.94 4.42               | 0.155 0.174         |
| S    | 4.72 4.85               | 0.186 0.191         |
| T    | 24.59 25.07             | 0.968 0.987         |
| U    | -0.05 0.1               | -0.002 0.004        |

Fig. 1 Output Characteristics

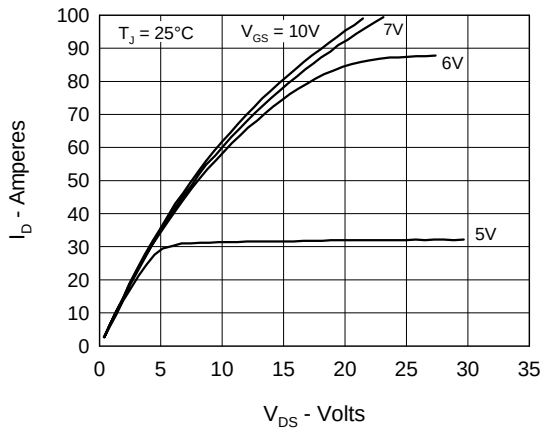


Fig. 2 Input Admittance

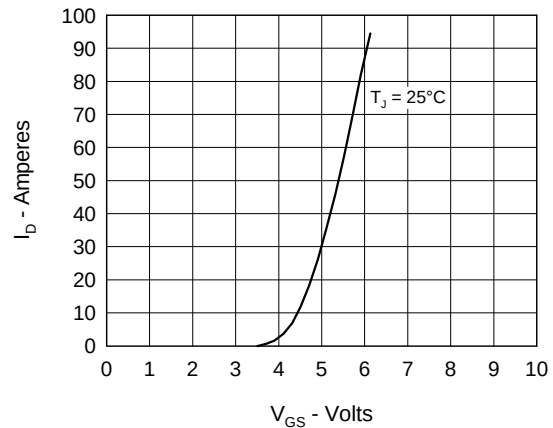


Fig. 3  $R_{DS(on)}$  vs. Drain Current

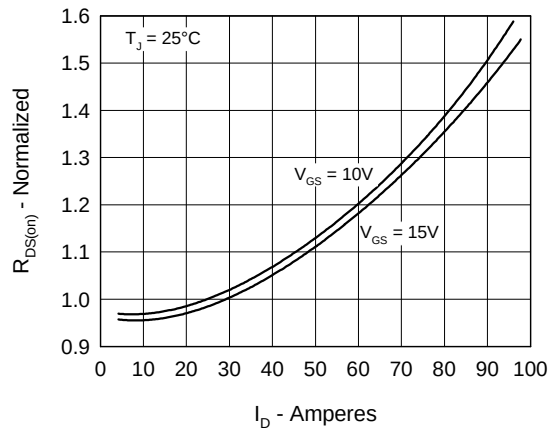


Fig. 4 Temperature Dependence of Drain to Source Resistance

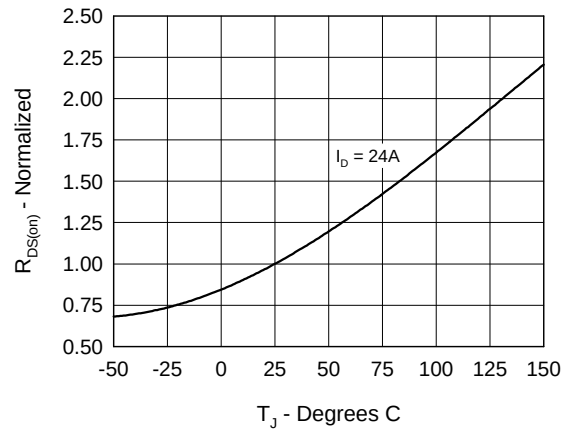


Fig. 5 Drain Current vs. Case Temperature

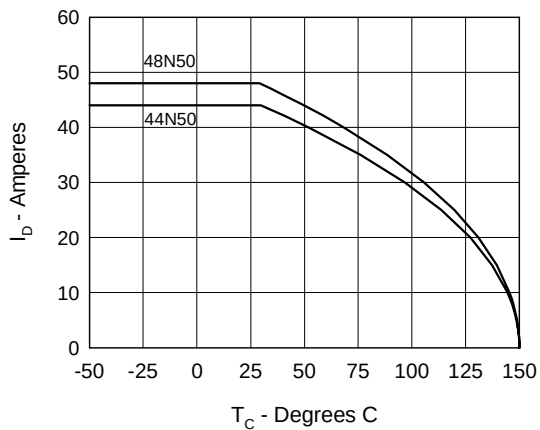


Fig. 6 Temperature Dependence of Breakdown and Threshold Voltage

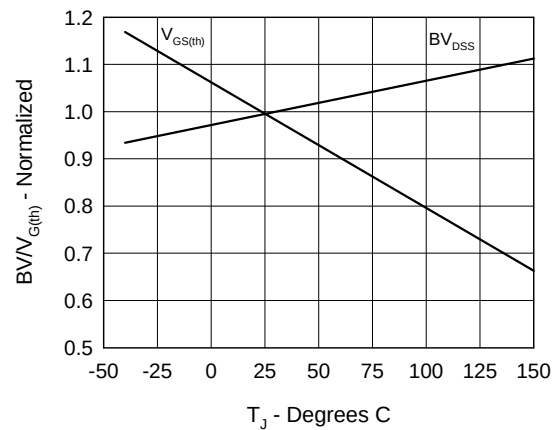


Fig.7 Gate Charge Characteristic Curve

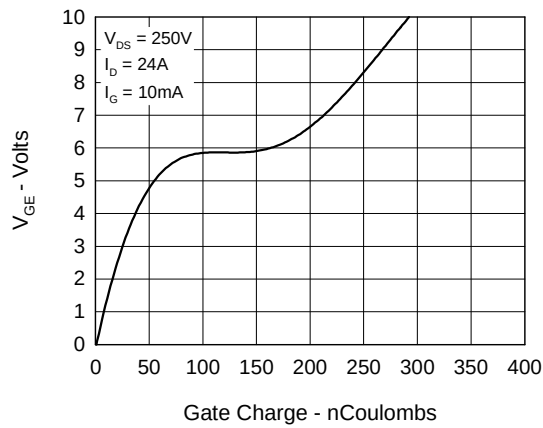


Fig.8 Capacitance Curves

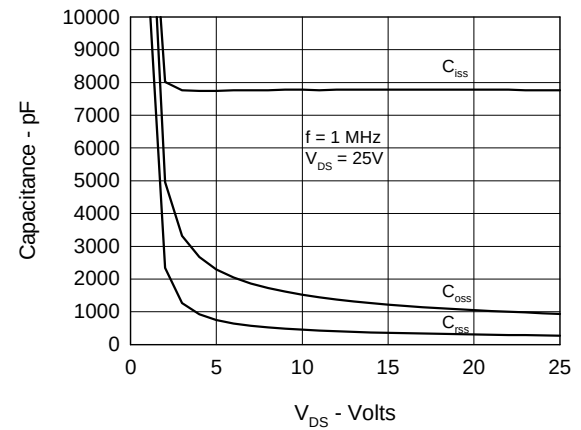


Fig.9 Source Current vs. Source to Drain Voltage

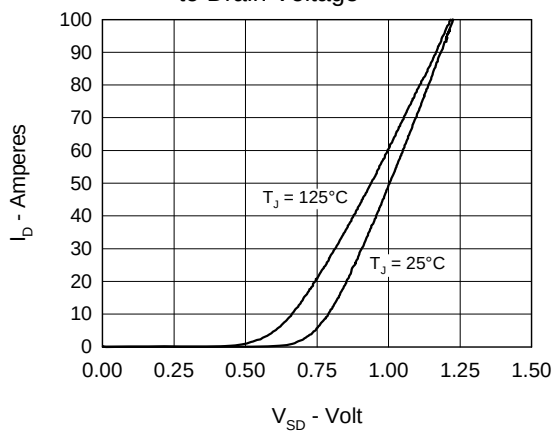


Fig.10 Transient Thermal Impedance

