



Features:

- High surge current capability
- 3 Ampere operation at $T_A = 55^\circ\text{C}$ with no thermal runaway
- Exceeds environmental standards of MIL-S-19500/228
- Fast switching for high efficiency

Specifications:

Mechanical Data:

Case	: Moulded plastic.
Terminals	: Axial leads, solderable per MIL-STD-202, Method 208.
Polarity	: Band denotes cathode.
Mounting position	: Any

Maximum Ratings and Electrical Characteristics:

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.



For capacitive load, derate current by 20%.

Parameters	PS3010R	Units
Maximum Recurrent Peak Reverse Voltage	1,000	V
Maximum RMS Voltage	700	
Maximum DC Blocking Voltage	1,000	
Maximum Average Forward Rectified Current 0.375" (9.5mm) Lead Length at $T_A = 55^\circ\text{C}$	3	A
Peak Forward Surge Current 8.3Ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC Method)	200	
Maximum Forward Voltage at 3.0A	1.3	V
Maximum Reverse Current $T_J = 25^\circ\text{C}$ at Rated DC Blocking Voltage $T_J = 100^\circ\text{C}$	5 500	μA μA
Maximum Reverse Recovery Time (Note 1)	500	nS

Parameters	PS3010R	Units
Typical Junction Capacitance (Note 2) C _J	60	pF
Typical Thermal Resistance (Note 3) R _{θJA}	22	°C/W
Operating and Storage Temperature Range	-55 to +150	°C

Notes:

1. Reverse Recovery Test Conditions: $I_F = 0.5A$, $I_R = 1A$, $I_{RR} = 0.25A$.
2. Measured at 1MHz and Applied Reverse Voltage of 4V DC.
3. Thermal resistance from junction to ambient and from junction to lead at 0.375" (9.5mm) lead length with both leads equally heatsink.

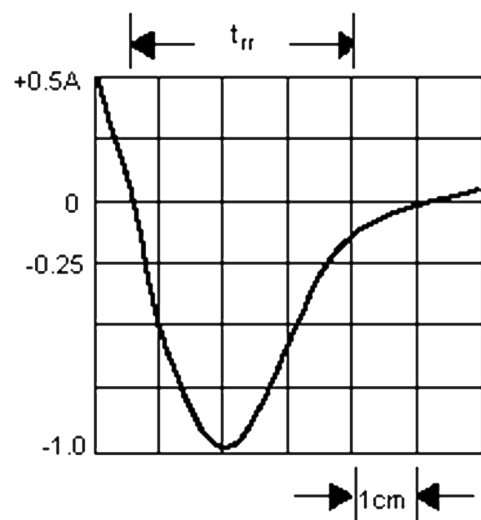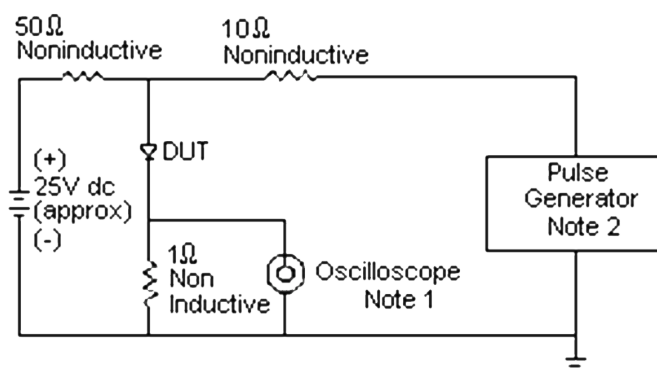

Set Time Base For 50nS/cm

Notes:

1. Rise Time = 7nS maximum Input Impedance = 1MΩ, 22pF
2. Rise Time = 10nS maximum Source Impedance = 50Ω

Figure 1 - Reverse Recovery Time Characteristics and Test Circuit Diagram

Ratings and Characteristic Curves

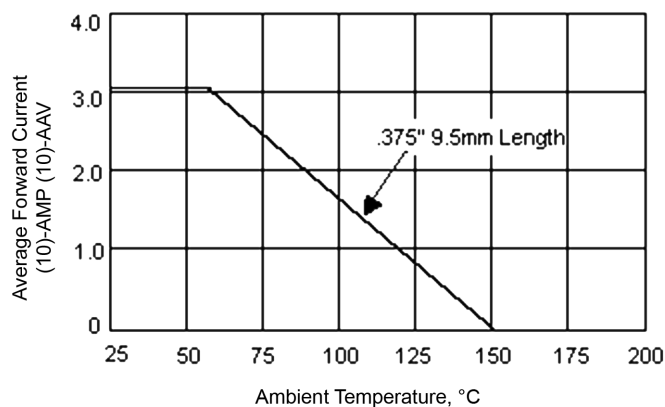


Figure 2 - Forward Current Derating Curve

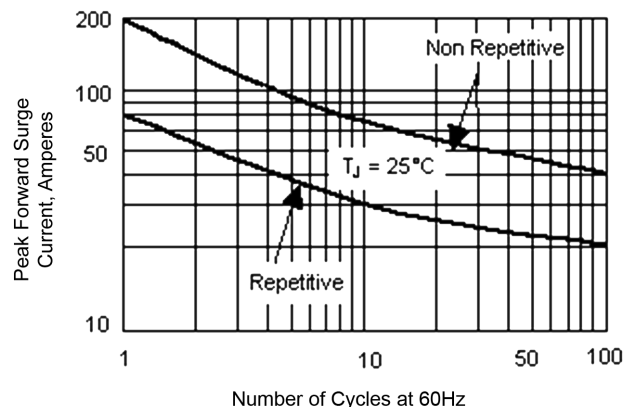


Figure 3 - Peak Forward Surge Current

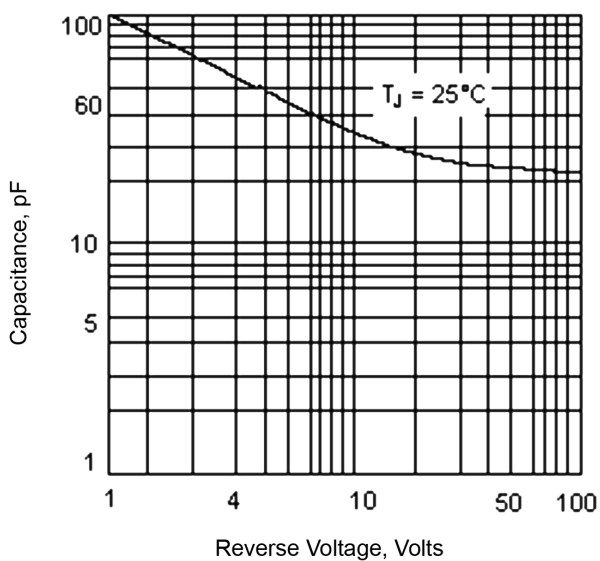


Figure 4 - Typical Junction Capacitance


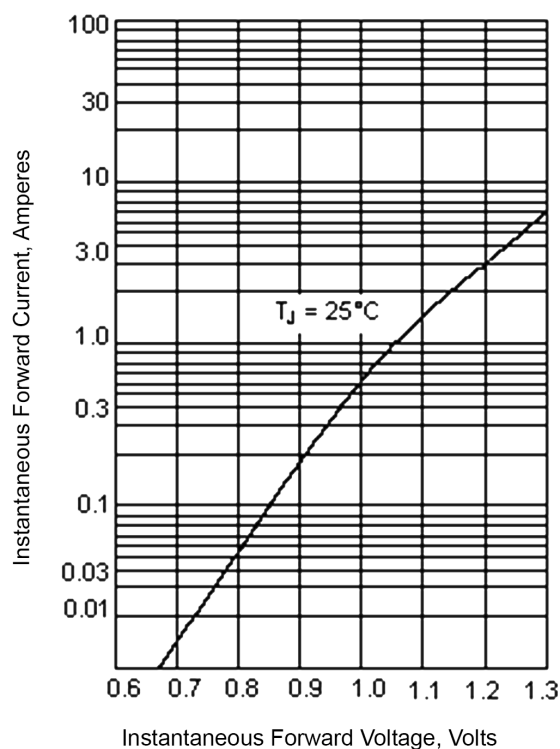


Figure 5 - Typical Instantaneous Forward Characteristics

DO-201AD

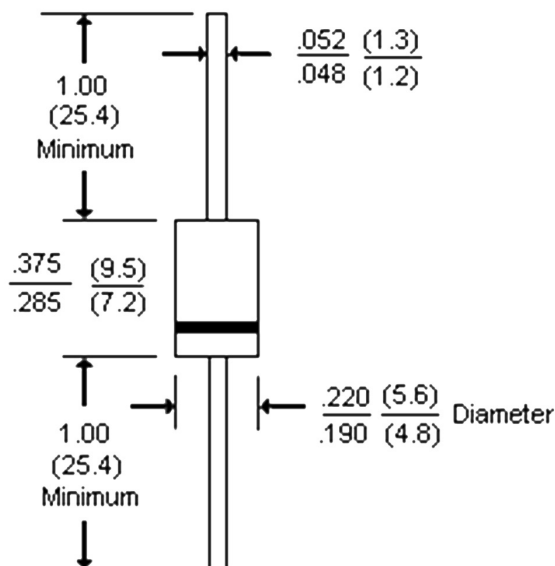

Dimensions : Inches (Millimetres)

Part Number Table

Description	Part Number
Diode, Fast, 3A, 1,000V	PS3010R

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.