

DOCUMENT NUMBER AND REVISION
VL-FS-BTHQ 21603VSS-02 REV.A
(BTHQ 21603V-FSTF-LED05W(1 DIE)-CONN.)

DOCUMENT TITLE:
SPECIFICATION
OF
LCD MODULE TYPE
ITEM NO.: BTHQ 21603VSS-02

APPROVALS:

EFFECTIVE DATE

DEPARTMENT	NAME	SIGNATURE	DATE
MARKETING (TECHNICAL SUPPORT)	PHILIP CHENG		2002.1.9
LCM(DSIGN)	Z.B.HE		2002.1.9
MARKETING (TECHNICAL SUPPORT)	CYRUS CHEUNG		2002/1/9

Page No.	1	2	3	4	5	6	7	8	9	10	11	12	13
Rev. No.	A	A	A	A	A	A	A	A	A	A	A	A	A

Page No.	14	15	16
Rev. No.	A	A	A

DOCUMENT REVISION HISTORY 1:

DOCUMENT REVISION FROM TO	DATE	DESCRIPTION	CHANGED BY	CHECKED BY
A	2002.01.11	First Release	PHILIP CHENG	Z.B.HE

CONTENTS

	<u>Page No.</u>
1. GENERAL DESCRIPTION	4
2. MECHANICAL SPECIFICATIONS	4
3. INTERFACE SIGNALS	6
4. ABSOLUTE MAXIMUM RATINGS	7
4.1 ELECTRICAL MAXIMUM RATINGS (Ta=25°C)	7
4.2 ENVIRONMENTAL CONDITION	7
5. ELECTRICAL SPECIFICATIONS	8
5.1 TYPICAL ELECTRICAL CHARACTERISTICS	8
5.2 TIMING SPECIFICATIONS	9
5.3 TIMING DIAGRAM OF VDD AGAINST V0	11
5.4 CORRESPONDENCE BETWEEN CHARACTER CODES AND CHARACTER PATTERNS (NOVATEK STANDARD NT3881D-01)	12
6. APPENDIX	13

**Specification
of
LCD Module Type
Item No.: BTHQ 21603VSS-02**

1. General Description

- 16 characters (5x8 dots) x 2 lines FSTN Positive Black & White Transflective Dot Matrix LCD module.
- Viewing Angle: 6 O'clock direction.
- Driving scheme: 1/16 Duty, 1/5 bias.
- 'NOVATEK' NT3881DH-01/AI (Die form) LCD Controller and Driver or equivalent.
- 'SAMSUNG' KS0065B-PCC (Die form) 40-Channel Segment/Common Driver for Dot Matrix LCD or equivalent.
- Connector: 16 pins ZIF SMD connector (CON-IL-402).
- White LED05 backlight.

2. Mechanical Specifications

The mechanical detail is shown in Fig. 1 and summarized in Table 1 below.

Table 1

Parameter	Specifications	Unit
Outline dimensions	53.0(W) x 20.0(H) x 8.5 MAX.(D) (Excluded connector)	mm
Effective viewing area	36.0(W) x 10.0(H)	mm
Active area	34.10(W) x 7.40(H)	mm
Display format	16 characters x 2 lines	-
Character size	1.85(W) x 3.15(H) (5 x 8 dots)	mm
Character spacing	0.30(W) x 1.10(H)	mm
Character pitch	2.15(W) x 4.25(H)	mm
Dot size	0.358(W) x 0.381(H)	mm
Dot spacing	0.015(W) x 0.015(H)	mm
Dot pitch	0.373(W) x 0.396(H)	mm
Weight:	TBD	grams

3. Interface signals

Table 2

Pin No.	Symbol	Description
1	VSS	Ground(0V).
2	VDD	Power supply for logic (+5V)
3	V0	Power supply for LCD driver
4	RS	Register Select Input: "High" for Data register (for read and write) "Low" for Instruction register (for write), Busy flag, address counter (for read)
5	R/W	Read/Write signal: "High" for Read mode. "Low" for Write mode.
6	E	Enable. Start signal for data read /write.
7	DB0	Data input/output (LSB)
8	DB1	Data input/output
9	DB2	Data input/output
10	DB3	Data input/output
11	DB4	Data input/output
12	DB5	Data input/output
13	DB6	Data input/output
14	DB7	Data input/output (MSB)
15	LED(+)	Anode of LED backlight
16	LED(-)	Cathode of LED backlight

4. Absolute Maximum Ratings

4.1 Electrical Maximum Ratings($T_a = 25^\circ\text{C}$)

Table 3

Parameter	Symbol	Min.	Max.	Unit
Power Supply voltage (Logic)	VDD - VSS	-0.3	+7.0	V
Power Supply voltage (LCD drive)	VLCD=VDD – V0	-0.3	+13.5	V
Input voltage	Vin	-0.3	VDD +0.3	V

Note:

The modules may be destroyed if they are used beyond the absolute maximum ratings.

All voltage values are referenced to VSS = 0V.

4.2 Environmental Condition

Table 4

Item	Operating Temperature (Topr)		Storage Temperature (Tstg)		Remark
	Min.	Max.	Min.	Max.	
Ambient Temperature	0°C	+50°C	-10°C	+60°C	Dry
Humidity	95% max. RH for $T_a \leq 40^\circ\text{C}$ < 95% RH for $T_a > 40^\circ\text{C}$				no condensation
Vibration (IEC 68-2-6) cells must be mounted on a suitable connector	Frequency: 10 ~ 55 Hz Amplitude: 0.75 mm Duration: 20 cycles in each direction.				3 directions
Shock (IEC 68-2-27) Half-sine pulse shape	Pulse duration : 11 ms Peak acceleration: $981 \text{ m/s}^2 = 100\text{g}$ Number of shocks : 3 shocks in 3 mutually perpendicular axes.				3 directions

5. Electrical Specifications

5.1 Typical Electrical Characteristics

At Ta = 25 °C, VDD = 5V±5%, VSS=0V.

Table 5

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Supply voltage (Logic)	VDD-VSS		4.75	5.0	5.25	V
Supply voltage (LCD)	VLCD =VDD-V0	VDD =5.0V, Note1.	4.1	4.6	5.1	V
Input signal voltage 1 for E,DB0-DB7,R/W,RS.	V _{IH1}	"H" level	2.2	-	VDD	V
	V _{IL1}	"L" level	-0.3	-	0.8	V
Input signal voltage 2 for OSC1.	V _{IH2}	"H" level	VDD -1.0	-	VDD	V
	V _{IL2}	"L" level	VSS	-	1.0	V
Supply Current (Logic & LCD)	IDD	Character mode, Note 1	-	1.1	1.6	mA
		Checker board mode, Note 1	-	1.5	2.5	mA
Supply Current (LCD)	I0	Character mode, Note 1	-	0.2	0.3	mA
		Checker board mode, Note 1	-	0.2	0.3	mA
Supply voltage of white LED05 backlight	VLED	Forward current =20mA Number of LED dies =1	3.1	3.4	3.7	V

Note (1) : There is tolerance in optimum LCD driving voltage during production and it will be within the specified range.

5.2 Timing Specifications

At $T_a = 0\text{ }^{\circ}\text{C}$ To $+50\text{ }^{\circ}\text{C}$, $V_{DD} = +5V \pm 5\%$, $V_{SS} = 0V$.

Refer to Fig. 2, the bus timing diagram for write mode.

Table 6

Parameter	Symbol	Min.	Max.	Unit	Remarks
Enable cycle time	t_{CYCE}	500	-	ns	
Enable "High" level pulse width	t_{WHE}	300	-	ns	
Enable rise time	t_{RE}	-	25	ns	
Enable fall time	t_{FE}	-	25	ns	
RS, R/W set-up time	t_{AS}	60	-	ns	8-bit operation mode
		100			4-bit operation mode
RS, R/W address hold time	t_{AH}	10	-	ns	
Data output delay	t_{DS}	100	-	ns	
Data hold time	t_{DHR}	10	-	ns	

Refer to Fig. 3, the bus timing diagram for read mode .

Table 7

Parameter	Symbol	Min.	Max.	Unit	Remarks
Enable cycle time	t_{CYCE}	500	-	ns	
Enable "High" level pulse width	t_{WHE}	300	-	ns	
Enable rise time	t_{RE}	-	25	ns	
Enable fall time	t_{FE}	-	25	ns	
RS, R/W set-up time	t_{AS}	60	-	ns	8-bit operation mode
		100			4-bit operation mode
RS, R/W address hold time	t_{AH}	10	-	ns	
Read data output delay	t_{RD}	-	190	ns	
Read data hold time	t_{DHR}	20	-	ns	

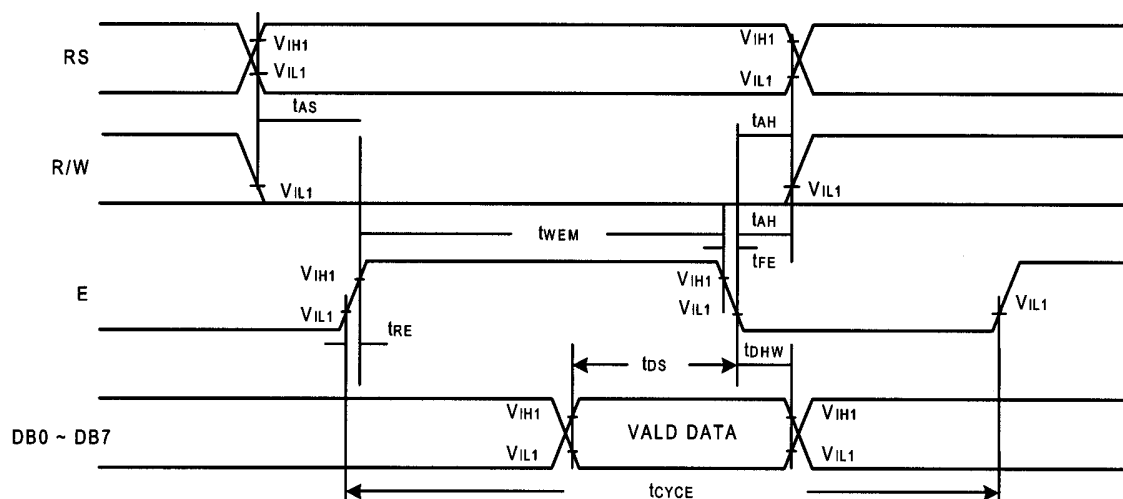


Figure 2: Bus write operation sequence (Writing data from MPU to NT3881).

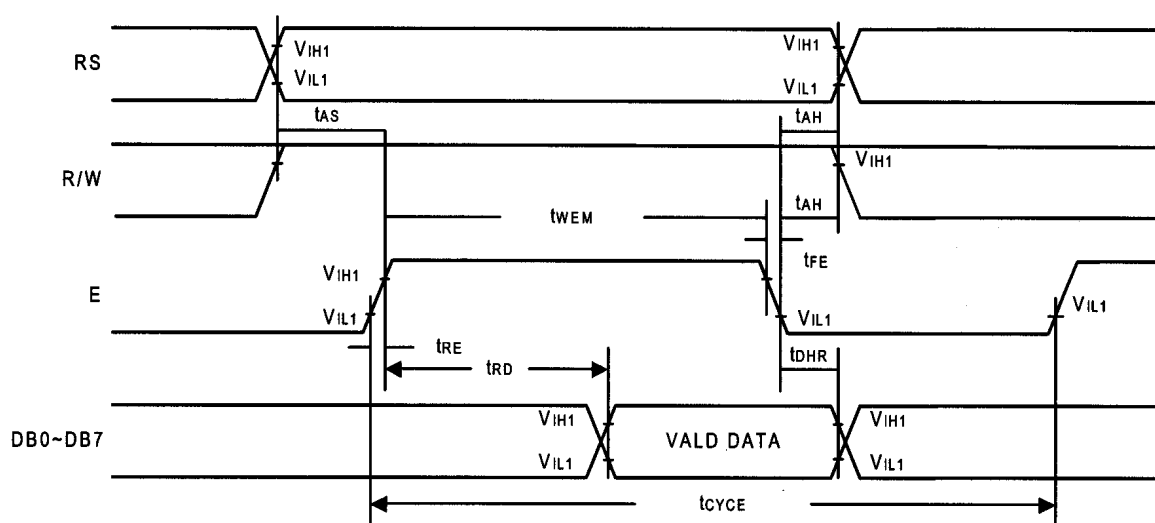


Figure 3: Bus read operation sequence (Reading out data from NT3881 to MPU).

5.3 Timing Diagram of VDD against V0.

Power on sequence shall meet the requirement of Figure 4, the timing diagram of VDD against V0.

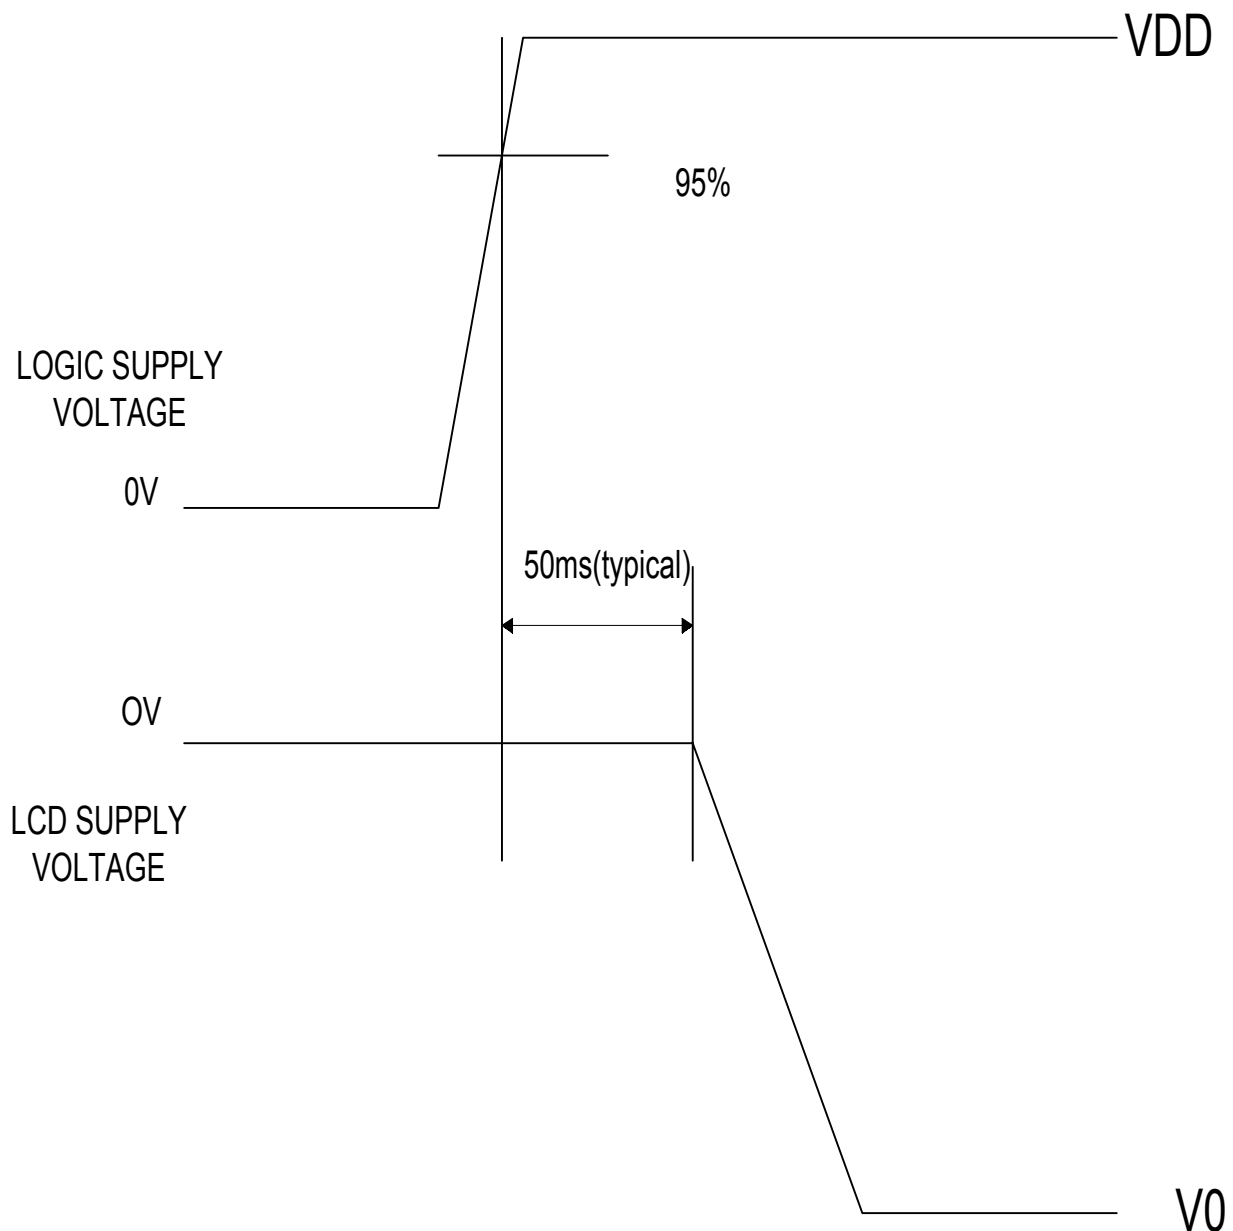


Figure 4: Timing diagram of VDD against V0.

5.4 Correspondence between Character Codes and Character Patterns (NOVATEK Standard NT3881D-01)

		Higher 4-bit (D4 to D7) of Character Code (Hexadecimal)															
		0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
Lower 4-bit (D0 to D3) of Character Code (Hexadecimal)	0	CG RAM (1)			0	a	P	`	P				ー	夕	ミ	α	p
	1	CG RAM (2)		!	1	A	Q	a	q			。	ア	チ	厶	ä	q
	2	CG RAM (3)		"	2	B	R	b	r			「	イ	ウ	×	β	θ
	3	CG RAM (4)		#	3	C	S	c	s			」	ウ	テ	モ	ε	ω
	4	CG RAM (5)		\$	4	D	T	d	t			、	エ	ト	十	μ	Ω
	5	CG RAM (6)		%	5	E	U	e	u			。	オ	ナ	1	δ	Ü
	6	CG RAM (7)		&	6	F	V	f	v			ヲ	カ	ニ	ヨ	ρ	Σ
	7	CG RAM (8)		'	7	G	W	g	w			ア	キ	ヌ	ラ	g	π
	8	CG RAM (1)		(	8	H	X	h	x			イ	ク	ネ	リ	フ	Σ
	9	CG RAM (2)		)	9	I	Y	i	y			ウ	ケ	ル	ル	リ	Y
	A	CG RAM (3)		*	:	J	Z	j	z			エ	コ	ン	レ	J	〒
	B	CG RAM (4)		+	;	K	[	k	[			オ	サ	ヒ	ロ	*	万
	C	CG RAM (5)		,	<	L	¥	l	l			ヤ	シ	フ	ワ	Φ	円
	D	CG RAM (6)		-	=	M	]	m	]			ユ	ズ	へ	ン	モ	÷
	E	CG RAM (7)		.	>	N	^	n	→			ヨ	セ	ホ	°	ん	
	F	CG RAM (8)		/	?	O	_	o	+			ッ	リ	マ	°	ö	

6. APPENDIX

These specifications shall be applied to the White LED-Lamp (LED or LEDs),
NSPWF50BS, which is supplied by Nichia Corporation (Nichia).

1. SPECIFICATIONS

(1) Absolute Maximum Rating

(Ta=25°C)

Item	Symbol	Absolute Maximum Rating	Unit
Forward Current	IF	30	mA
Pulse Forward Current	IFP	100	mA
Reverse Voltage	VR	5	V
Power Dissipation	PD	120	mW
Operating Temperature	Topr	-30 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +100	°C
Lead Soldering Temperature	Tsol	260±5°C for 5sec. (3.0mm from the base of the epoxy bulb)	

IFP Conditions : Pulse Width ≤ 10msec. and Duty ≤ 1/10

(2) Initial Electrical/Optical Characteristics

(Ta=25°C)

Item		Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage		V _F	I _F =20[mA]	—	3.6	4.0	V
Reverse Current		I _R	V _R = 5[V]	—	—	50	μ A
Luminous Intensity	Rank S	I _v	I _F =20[mA]	300	360	420	mcd
	Rank R	I _v	I _F =20[mA]	210	260	300	mcd
	Rank Q	I _v	I _F =20[mA]	150	180	210	mcd

※ One delivery will include three different ranks of products. The quantity-ratio of the three ranks is decided by Nichia.
Measurement Uncertainty of the Luminous Intensity : ±10%

Color Ranks

(IF=20mA, Ta=25°C)

	Rank a			
x	0.250	0.250	0.290	0.290
y	0.205	0.250	0.305	0.260

	Rank b			
x	0.290	0.290	0.330	0.330
y	0.260	0.305	0.365	0.320


	Rank c			
x	0.330	0.330	0.370	0.370
y	0.320	0.365	0.420	0.375







※ One delivery will include the consecutive two ranks of products.
The quantity-ratio of the two ranks is decided by Nichia.
Measurement Uncertainty of the Color Coordinates : ±0.02

2. TYPICAL INITIAL OPTICAL/ELECTRICAL CHARACTERISTICS

Please refer to figures No.STLZ-A906042, No.STLZ-A801473.





ICI Chromaticity Diagram

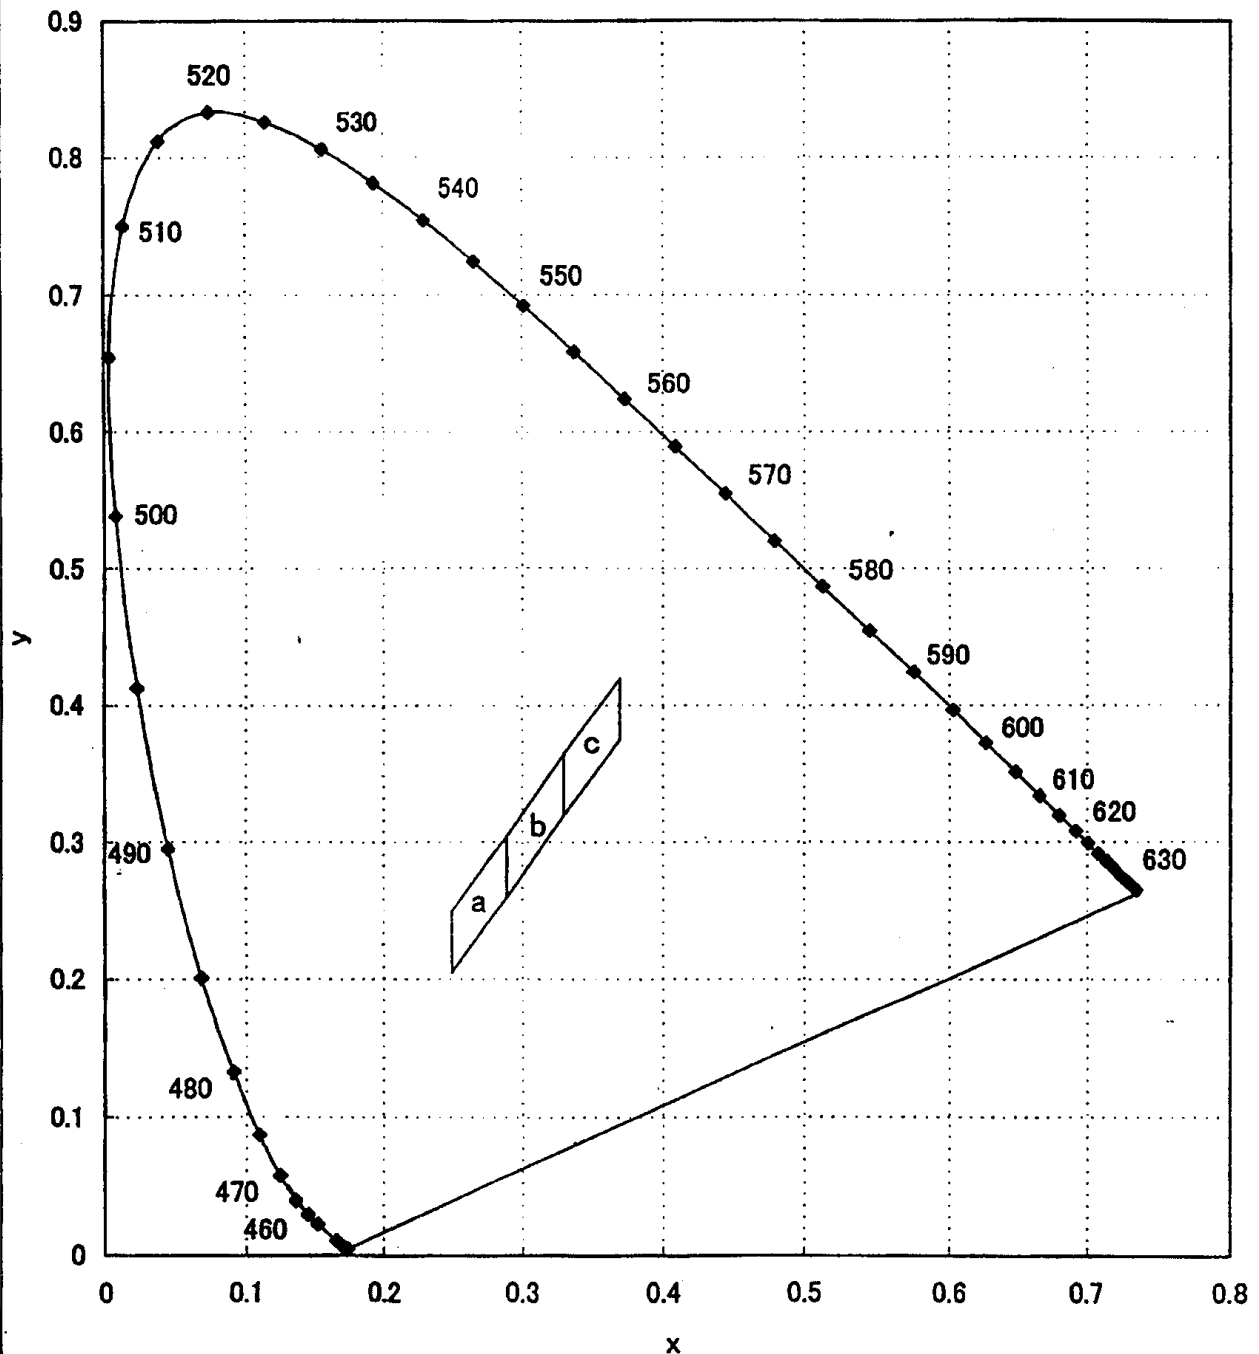

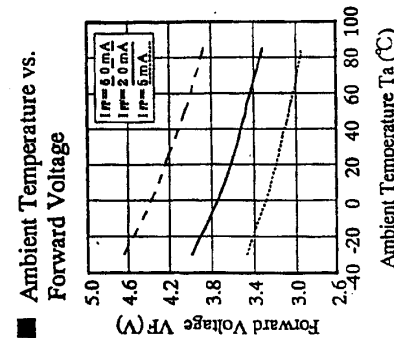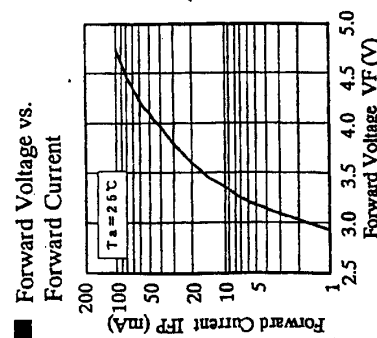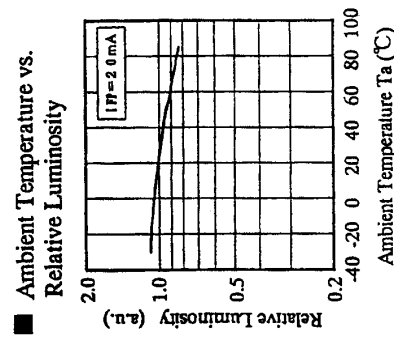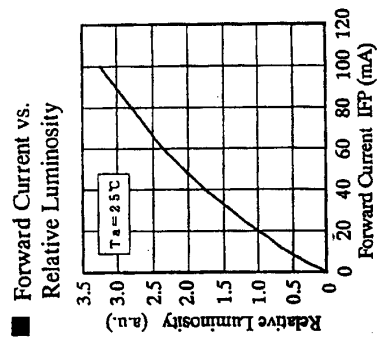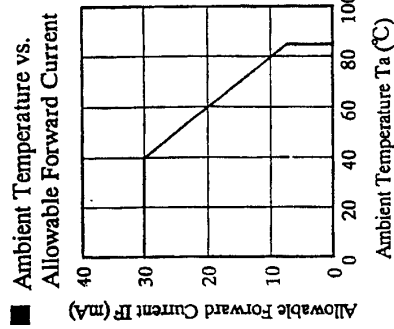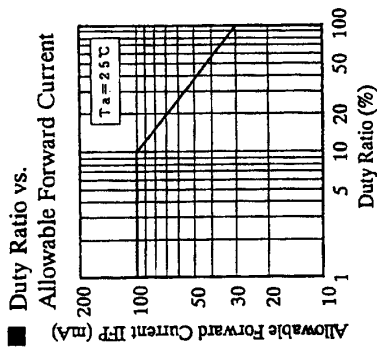

Rev.1	Section	Approve	Check	Draw
Rev.2	ST	Bando	Yanase	Tamura
Rev.3	Date	Jun.1,1999		
Rev.4	Model	NSPWxxxx		
Title TYP.CHARACTERISTICS				
No. STLZ-A906042				

NICHIA CORPORATION

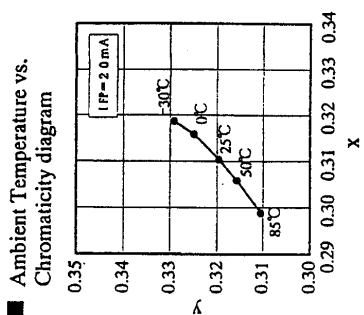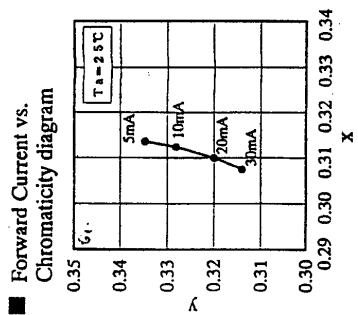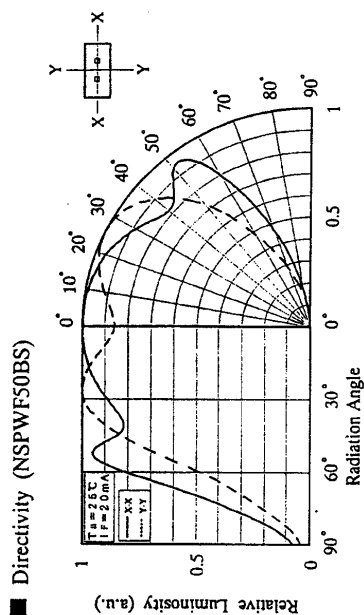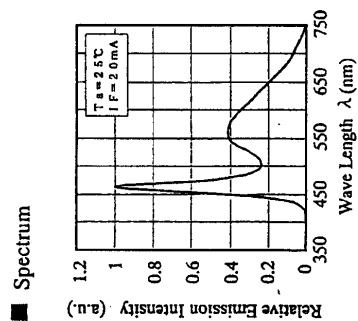

Rev.1	Section	Approve	Check	Draw
Rev.2	ST	<i>Bandz</i>	<i>Yamada</i>	<i>Takeji</i>
Rev.3	Date	Jun.1.1999		
Rev.4	Model	NSPWF50BS		
NICHIA CORPORATION				
Title TYP.CHARACTERISTICS				
No.				STLZ-A801473