


**SPECIFICATION
CONTROL DRAWING
Crystal Resonator**

FREQUENCY
30.000000MHz

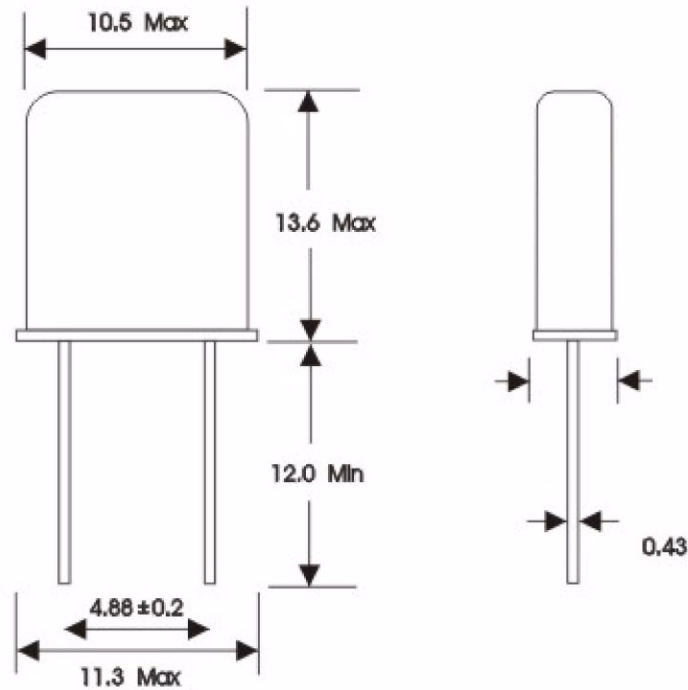

Holder Style	HC-49/U
Mode	3rd Overtone
Adjustment Tolerance	± 20PPM at 25°C
Temperature Stability	± 50 PPM
Operating Temp. Range	-10°C to +60°C
ESR	35 Ohm
Marking	Mark AELX001L\FREQ+WWYY

Amdt Date	Change Note	AEL Code	
		X30M000000L001	
		Issue Ref	A