


LCR**MKP/HR - POLYPROPYLENE**

These capacitors are particularly suitable for telephone equipment where low loss, excellent stability and high reliability are required.

The 'high-rise' shape facilitates high packing density.

They are metallised polypropylene capacitors sealed into a case with epoxy resin, both materials being flame retardant and resistant to cleaning fluids.

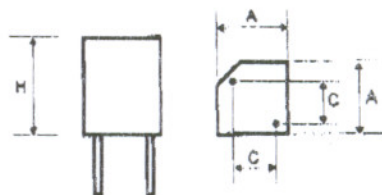

CHARACTERISTICS	
Capacitance :	8,201 - 120,000 pF
Capacitance Tolerance :	± 1%, 2%, 5%
Voltage * :	63 V.D.C.
Insulation Resistance (at 23°C) :	> 50,000 MΩ
Loss Factor (1KHz) :	0.0005
Temperature Coefficient :	- 160 ± 60 p.p.m./°C
Climatic Category :	40/085/56

DIMENSIONS :

A - 7.5mm

C - 5.08mm

H - 13mm max including stand offs.

TERMINATIONS :

0.6mm diam, 4 ± 1mm long

Considerable detailed data is available on specific components, for example : -

Loss factor at 120 Hz, 1000 Hz, 10KHz, 100KHz and 1MHz.

Self resonant frequencies.

* Other voltages available. Details on request.

Sales Office Tel : (01495) 307070

Fax : (01495) 306965

LCR
Capacitors

