SOT23 P-CHANNEL ENHANCEMENT MODE VERTICAL DMOS FET

ZVP3306F

ISSUE 3 – JANUARY 1996

FEATURES

* 60 Volt V_{DS}
* $R_{DS(on)}$=14Ω

PARTMARKING DETAIL – ML

COMPLEMENTARY TYPE – ZVN3306F



SOT23

ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Drain-Source Voltage	V_{DS}	-60	V
Continuous Drain Current at T_{amb}=25°C	I_D	-90	mA
Pulsed Drain Current	I_{DM}	-1.6	A
Gate Source Voltage	V_{GS}	± 20	V
Power Dissipation at T_{amb}=25°C	P_{tot}	330	mW
Operating and Storage Temperature Range	T_j:T_{stg}	-55 to +150	°C

ELECTRICAL CHARACTERISTICS (at T_{amb} = 25°C unless otherwise stated).

PARAMETER	SYMBOL	MIN.	MAX.	UNIT	CONDITIONS.
Drain-Source Breakdown Voltage	BV_{DSS}	-60		V	I_D=-1mA, V_{GS}=0V
Gate-Source Threshold Voltage	$V_{GS(th)}$	-1.5	-3.5	V	I_D=-1mA, V_{DS}= V_{GS}
Gate-Body Leakage	I_{GSS}		20	nA	V_{GS}=± 20V, V_{DS}=0V
Zero Gate Voltage Drain Current	I_{DSS}		-0.5 -50	μA μA	V_{DS}=-60 V, V_{GS}=0V V_{DS}=-48 V, V_{GS}=0V, T=125°C(2)
On-State Drain Current(1)	$I_{D(on)}$	-400		mA	V_{DS}=-18 V, V_{GS}=-10V
Static Drain-Source On-State Resistance (1)	$R_{DS(on)}$		14	Ω	V_{GS}=-10V, I_D=-200mA
Forward Transconductance (1)(2)	g_{fs}	60		mS	V_{DS}=-18V, I_D=-200mA
Input Capacitance (2)	C_{iss}		50	pF	V_{DS}=-18V, V_{GS}=0V, f=1MHz
Common Source Output Capacitance (2)	C_{oss}		25	pF	
Reverse Transfer Capacitance (2)	C_{rss}		8	pF	
Turn-On Delay Time (2)(3)	$t_{d(on)}$		8	ns	V_{DD}≈-18V, I_D=-200mA
Rise Time (2)(3)	t_r		8	ns	
Turn-Off Delay Time (2)(3)	$t_{d(off)}$		8	ns	
Fall Time (2)(3)	t_f		8	ns	

(1) Measured under pulsed conditions. Width=300μs. Duty cycle ≤2% (2) Sample test.
(3) Switching times measured with 50Ω source impedance and <5ns rise time on a pulse generator
Spice parameter data is available upon request for this device

TYPICAL CHARACTERISTICS

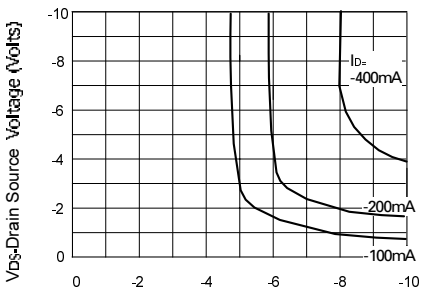

Voltage Saturation Characteristics

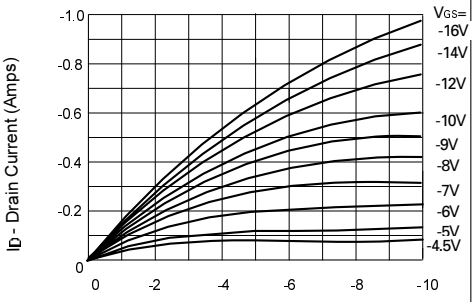

Saturation Characteristics

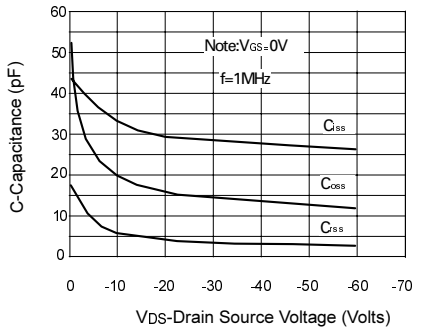

Capacitance v drain-source voltage

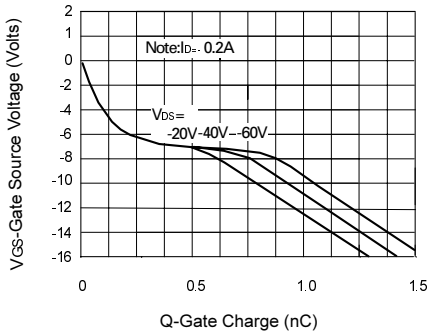

Gate charge v gate-source voltage

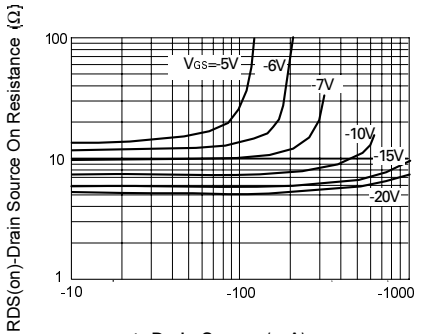

On-resistance vs Drain Current

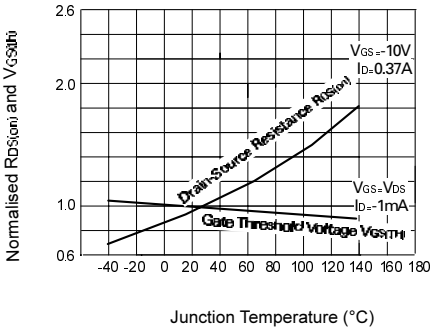

Normalised $R_{DS(on)}$ and $V_{GS(th)}$ vs Temperature