

used for:

NOTES:

1,Rating:300V 10A;


2,Insulation Withstands Voltage:
AC1500V/MIN

3,Insulation Resistance:
1000MΩ or more at DC500V




4,Using Temperature Range:
-40°C--+105°C

5.Screw Torque Vlaue:4.4kg-cm²

6,Suitable Electric Wire:
14-20AWG

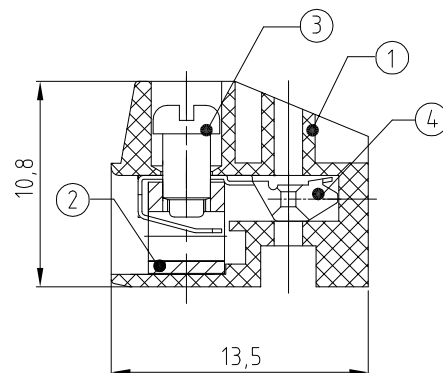

Section A -- A

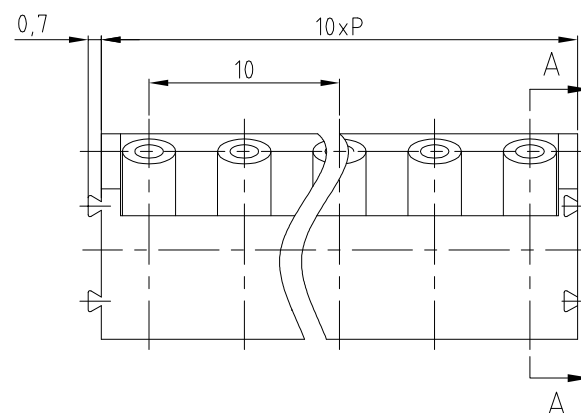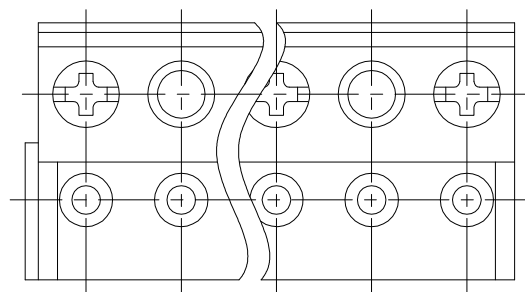

Pitch range in mm					Nominal dimension rage in mm					radius	chamfer	short angle side	≡	—	□	//
2	8	16	24	32	0.5	3	6	30	120	0.5	3	6	to	10	50	120
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
8	16	24	32	38	3	6	30	120	480	3	6	30	10	50	120	400
±0.08	±0.13	±0.18	±0.23	±0.28	±0.1	±0.1	±0.2	±0.3	±0.5	±0.2	±0.5	±1	1°	30'	20'	10'
8					7					6					5	

REV.	CONTENT	CHK.	DATE
------	---------	------	------

4	CLAMP	0018M00100	P	QSn6.5-0.1	Ni-Plated
3	SCREW	S000002500	P	STEEL	Zinc-Plated
2	BLOCK	C000001000	P	HPb59-1	Ni-Plated
1	Housing	0018P00200	1	PBT G20	UL94V-0
ITEM	NAME OF PART	NO OF PART	Q"TY	MATERIAL	NOTE
DWG.	CHEN.R	DATE	2004/02/06	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE			
				NAME	20.130M
				DWG NO.	