

used for:	
-----------	--

NOTES:

1,Rating:300V 10A;

2,Insulation Withstands Voltage:
AC1500V/MIN

3,Insulation Resistance:


1000M Ω or more at DC500V

4,Using Temperature Range:
-40°C--+105°C




5.Screw Torque Vlaue:4.4kg-cm²

6, Suitable Electric Wire:

14-20AWG

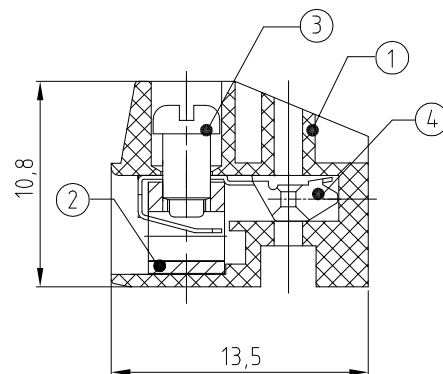

Section A -- A

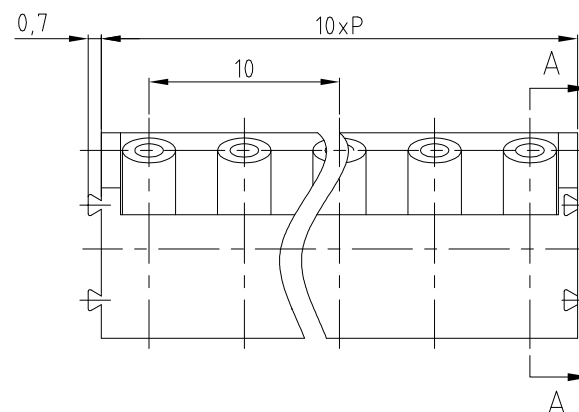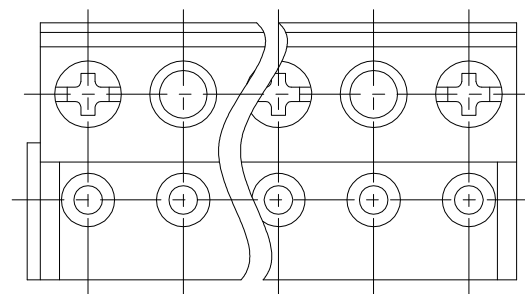

4	CLAMP	0018M00100	P	QSn6.5-0.1	Ni-Plated
3	SCREW	S000002500	P	STEEL	Zinc-Plated
2	BLOCK	C000001000	P	HPb59-1	Ni-Plated
1	Housing	0018P00200	1	PBT G20	UL94V-0
ITEM	NAME OF PART	NO OF PART	Q"TY	MATERIAL	NOTE
DWG.	CHEN.R	DATE	2004/02/06	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE			
				NAME	20.130M
				DWG.NO.	

Pitch range in mm						Nominal dimension rage				radius		chamfer		short angle side		=	—		//						
A						over	over	over	over	0.5	over	over		over	over	over	all	all		over	over	over			
	in	mm	in	mm	in	to	to	to	to	to	to	to	to	to	to	to			to	to	to	to			
	2	8	16	24	32	3	6	30	120	3	6	30	10	50	120	400			5	30	120	400			
	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to			to	to	to	to			
	8	16	24	32	38	3	6	30	120	480	3	6	30	10	50	120	400		5	30	120	400			
	±0.08	±0.13	±0.18	±0.23	±0.28	±0.1	±0.2	±0.3	±0.5	±0.2	±0.5	±1		1°	30'	20'	10'	0.2	0.5	0.025	0.06	0.12	0.4		
	8																								

			
REV.	CONTENT	CHK.	DATE