

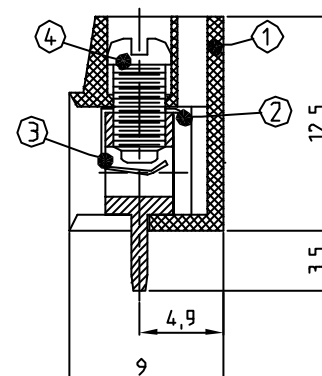
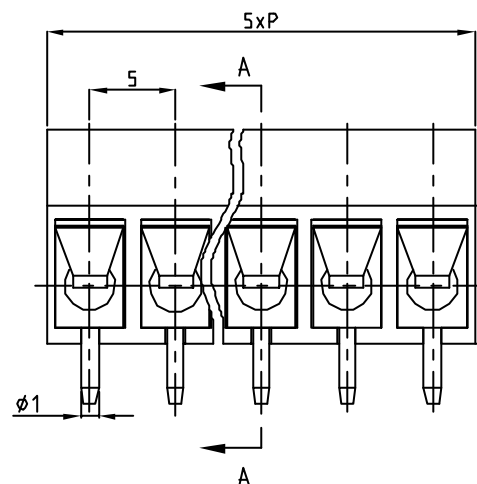



used for:

NOTES:

- 1.Rating:310V 16A;
- 2,Insulation Withstands Voltage:
AC1100V/MIN
- 3,Insulation Resistance:
1000M Ω or more at DC511V
- 4,Using Temperature Range:
-40°C---+105°C
- 5.Screw Torque Vlaue:4.4kg-cm
- 6,Suitable Electric Wire:
12-22AWG

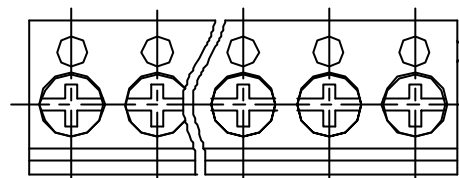

4	Screw	S111102700	P	Steel	Zinc-Plated
3	Pin	C000015711	P	HPb59-1	Tin-Plated
2	Clamp	1105M11111	P	QSn6.5-0.1	Ni-Plated
1	Housing	1116P01211	1	PBT G20	UL94 V-1
ITEM	NAME OF PART	NO OF PART	Q'TY	MATERIAL	NDTE
DWG.	CHENR	DATE	2004/12/16	UNTS	MN
CHK.		DATE		SCALE	1:1
APP.		DATE			
				NAME	20.101MXX
				DWG NO.	

A	Pitch range in mm					Nominal dimension range					radius		counter		slant angle side		/	÷	-	□	∥							
	0	16	25	32	40	over 63	over 80	over 100	over 125	over 160	over 200	over 250	over 315	over 400	over 500	over 630												
2	0	16	25	32	40	63	80	100	125	160	200	250	315	400	500	630	800	1000	125	160	200	250	315	400	500	630	800	1000
7u	8	16	26	32	38	63	70	80	90	100	110	120	130	140	150	160	180	200	250	300	360	420	480	540	600	660	720	780
±0.18	±0.13	±0.14	±0.12	±0.12	±0.12	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	
* 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100																												

REV.	CONTENT	CHK.	DATE

