
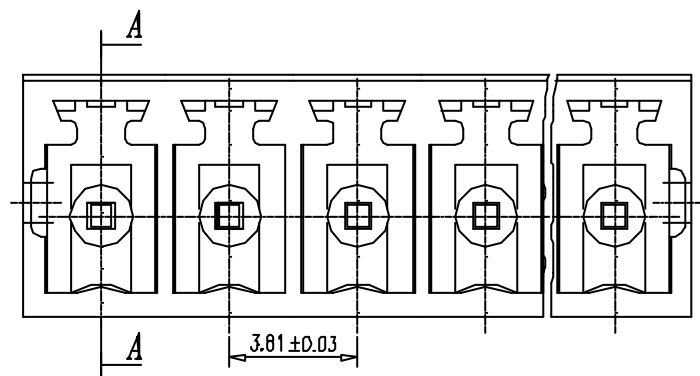
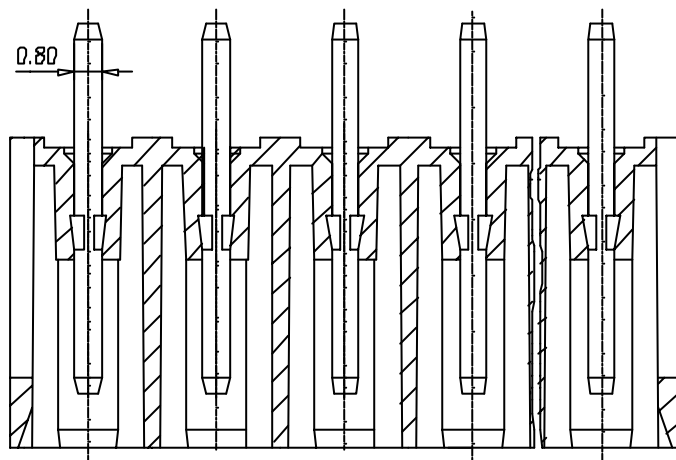
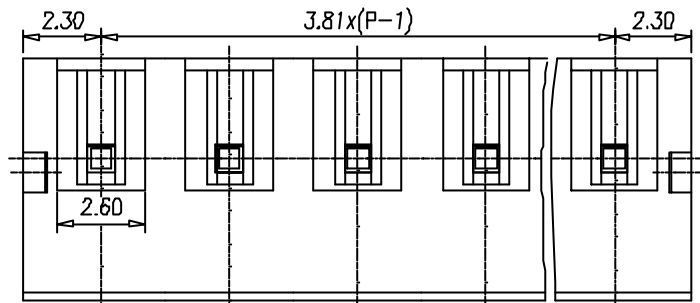


P.C.B. LAYOUT

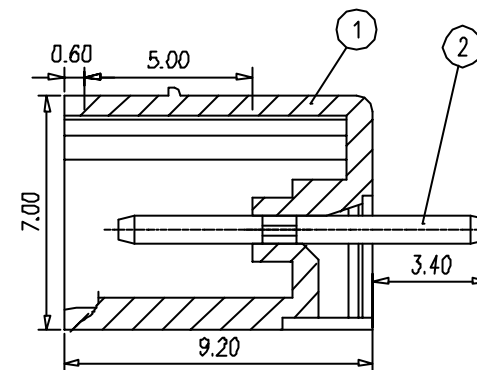

SECTION A-A

- NOTES:
- Rating: ~~400V~~ 300V 5A
 - Insulation Withstands Voltage: AC 1000V/MIN
 - Insulation Resistance: 1000MΩ or more at DC500V
 - Using Temperature Range: -40℃~+130℃
 - Using Electric Wire: AWG 22-16
 - Undimensioned Tolerances:

—	∠	□	0.05/10
⊥	∥	≡	0.3/10
PITCH ERROR			0.05/10
UNDIMENSIONED TOLERANCES			±0.3

2	SOLDER PIN	0070B00300	P	COPPER	Tin Plated
1	HOUSING	0070M00000	1	PBT	GREEN
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DWG.		DATE	99,01,28	UNITS	MM
		DATE		SCALE	6:1 (:)
		DATE		NAME	21.155MV/XX
REV.	CONTENT	CHK.	DATE	DWG NO.	

IMO