
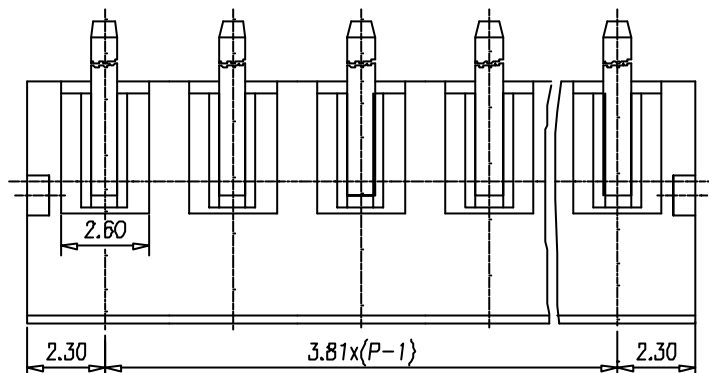
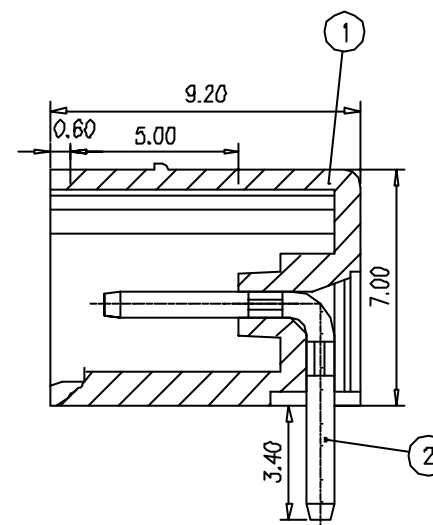



P.C.B. LAYOUT

- NOTES:
- Rating: ~~400V~~ 5A
PITCH: 3.81 mm
 - Insulation Withstands Voltage:
AC 1000 V/MIN
 - Insulation Resistance:
1000M Ω or more at DC500V
 - Using Temperature Range:
-40°C~+130°C
 - 300 Δ ~~6. Suitable Electric Wire: AWG 22-16~~
 - Undimensioned Tolerances:

—	∧	∇	0.05/0
⊥	//	≡	0.2/10
PITCH ERROR			0.05/0
UNDIMENSIONED TOLERANCES			±0.3

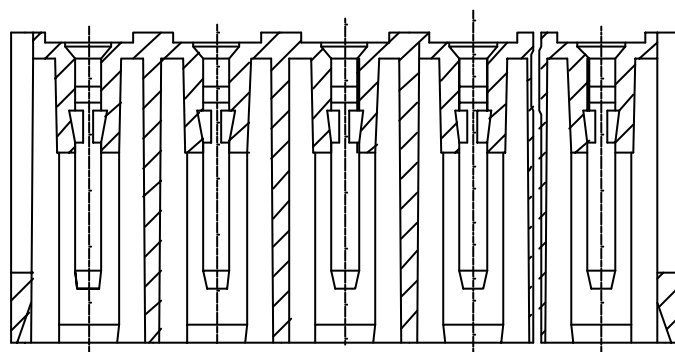

SECTION A-A

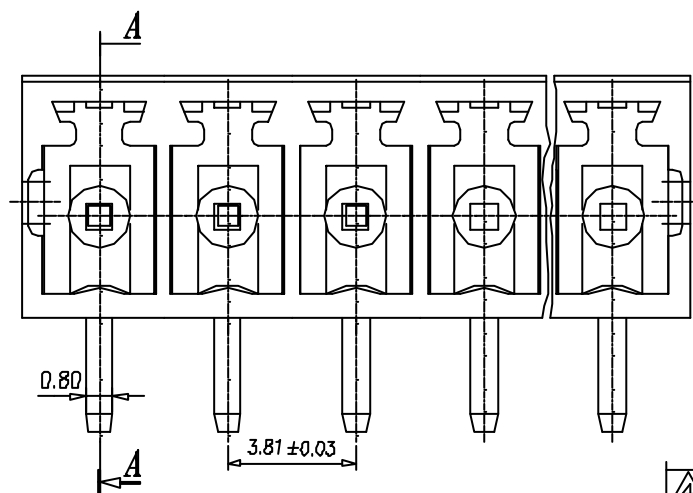

2	SOLDER PIN	0070B00200	P	COPPER	TIN PLATED
1	HOUSING	0070MQ000D	1	PBT	GREEN
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DWG.		DATE	99,01,28	UNITS	MM SHEET/OF 1/1
CHK.		DATE		SCALE	6:1 (:)
APP.		DATE		NAME	21.155MH/XX
REV.	CONTENT	CHK.	DATE	DWG NO.	

IMO