
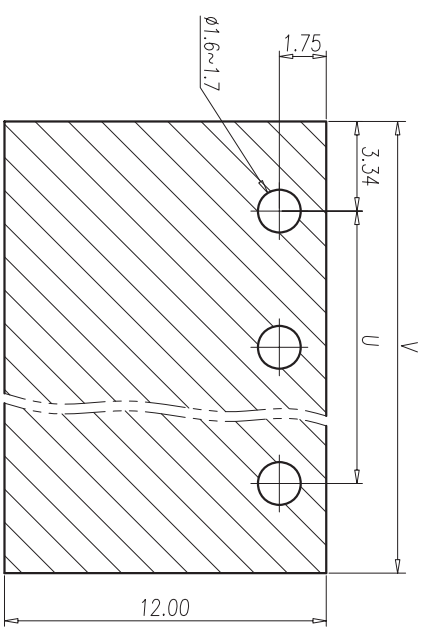
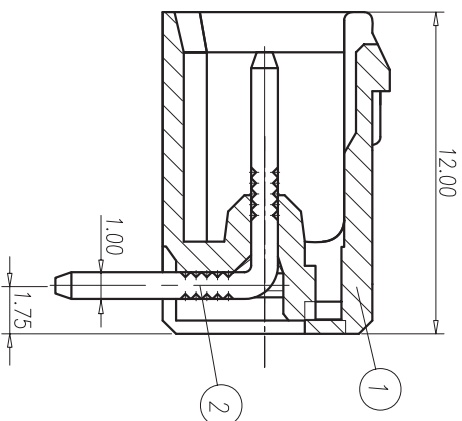
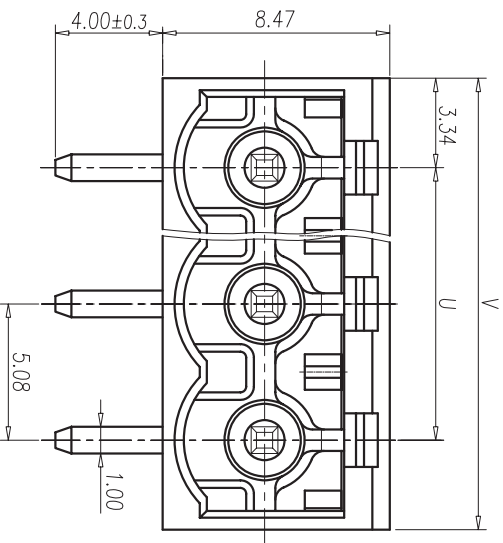


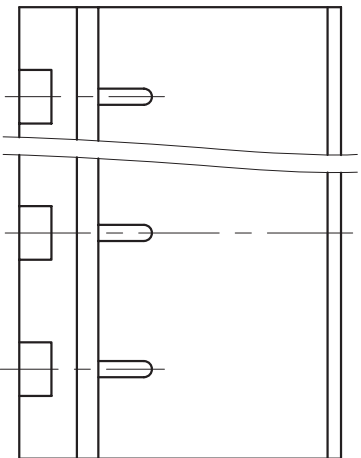

P.C.B. LAYOUT(REF)

NOTES:

1. Rating: 300V 15A(IEC 250V 17.5A)
PITCH: 5.08mm
2. Insulation Withstands Voltage:
AC 2000V at 1 minute
3. Insulation Resistance:
500MΩ or more at DC500V
4. Using Temperature Range:
-40℃~+105℃
5. RoHS Compliance

P	2	3	4	5	6	7	8	9	10	11	12	13
U	5.08	10.16	15.24	20.32	25.4	30.48	35.56	40.64	45.72	50.8	55.88	60.96
V	11.76	16.84	21.92	27	32.08	37.16	42.24	47.32	52.4	57.48	62.56	67.64
P	14	15	16	17	18	19	20	21	22	23	24	25
U	66.04	71.12	76.2	81.28	86.36	91.44	96.52	101.6	106.68	111.76	116.84	121.92
V	72.72	77.8	82.88	87.96	93.04	98.12	103.2	108.28	113.36	118.44	123.52	128.6

2	SOLDER PIN	COPPER ALLOY	Tin Plated
1	HOUSING	PA66	UL94-V0 GREEN

Normal Geometric Tolerancing			
—	//	=	⊥
0 to 100 over 100 to 150 over 150	0.2 0.3 0.5	0 to 10 over 10	0.2 0.3

Total Pitch Tolerances		Normal dimension Tolerances	
0<U<=30	±0.20	0~30	±0.25
30<U<=53	±0.25	over 30~53	±0.30
53<U<=70	±0.30	over 53~70	±0.35
70<U<=90	±0.35	over 70~90	±0.44
90<U<=115	±0.44	over 90~115	±0.55
115<U<=150	±0.55	over 115~150	±0.70
150<U<=200	±0.70	over 150~200	±0.85
200<U<=250	±0.85	over 200~250	±1.00
250<U<=320	±1.00	over 250~320	±1.20

△	REV.	CONTENT	CHK.	DATE

DWG.	HgX	DATE	11.04.21	UNITS	MM	SHEET/OF	1 / 1
CHK.		DATE		SCALE	5:1 (:)		
APP.		DATE		NAME	21.95MH/XX		



DWG NO.	