
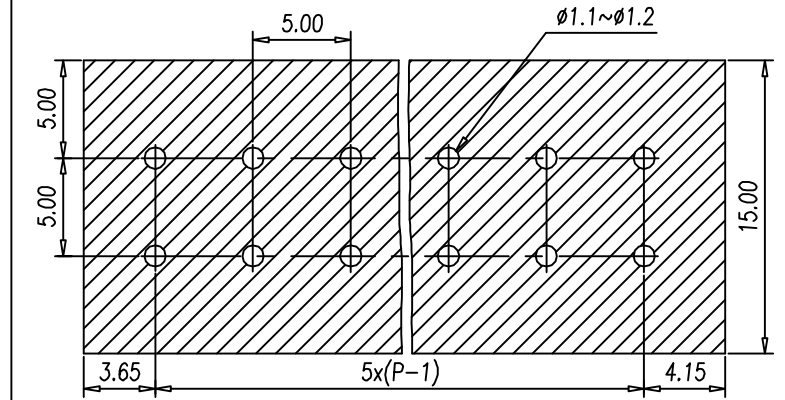
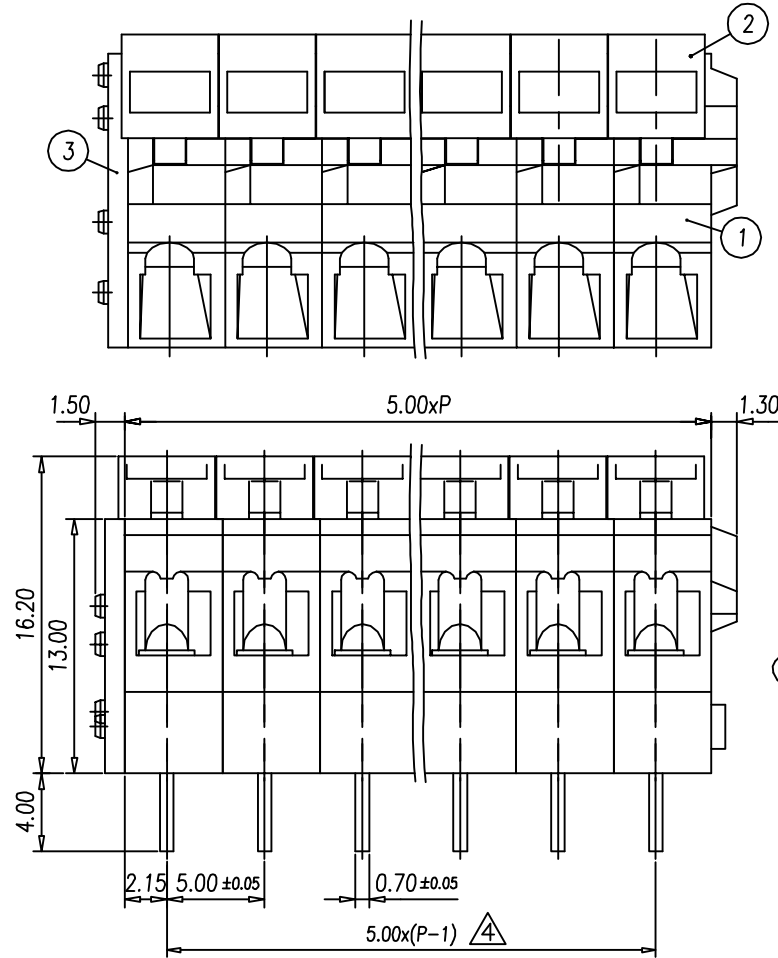


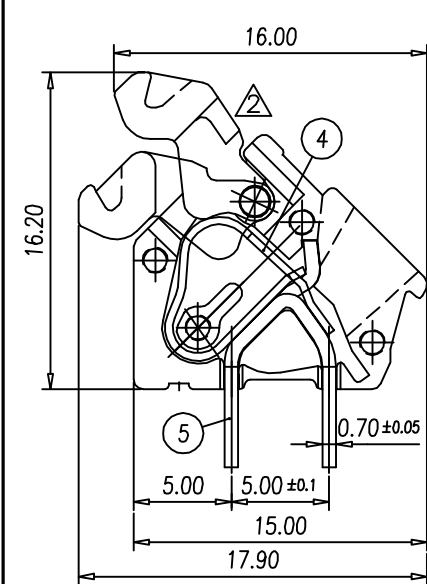


P.C.B. LAYOUT(REF)

NOTES:

1. Rating: 300V 15A
PITCH: 5.00mm
2. Insulation Withstands Voltage:
AC 2500V/MIN
3. Insulation Resistance:
1000MΩ or more at DC500V
4. Using Temperature Range:
-40°C~+105°C
5. Suitable Electric Wire: AWG 28~12
6. Undimensioned Tolerances:

—	∠	∇	0.05/10
⊥	//	≡	0.2/10
PITCH ERROR			0.05/10
UNDIMENSIONS TOLERANCES			±0.3

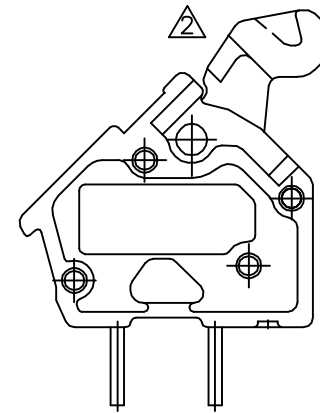

1	5	SOLDER PIN	0119B00100	P	COPPER	Tin Plated
1	4	CLAMP	X000003100	P	Stainless Steel	
2	3	END COVER	0119L1XX00	1	PA66(V0)	M001
1	2	LEVER	0119L0XX00	P	POM PA66(G30)	W005 WHITE
1	1	HOUSING	0119A1XX00	P	PA66(V0)	M001
ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL	NOTES

				ITEM	NAME OF PART		NO. OF PART		QTY	MATERIAL	NOTES	
④	工程變更	YFY	03.11.03	DWG.	.	DATE	99,10,15	UNITS	mm	SHEET/OF	1 / 2	
③	工程變更	張普	03.09.01	CHK.		DATE		SCALE	3.5:1(:)			
②	工程變更	李衛紅	01.12.20	APP.		DATE		NAME	20.3000M			
①	修改料號	蔣雪嬌	00.05.18									
REV.	CONTENT	CHK.	DATE									DWG NO.