
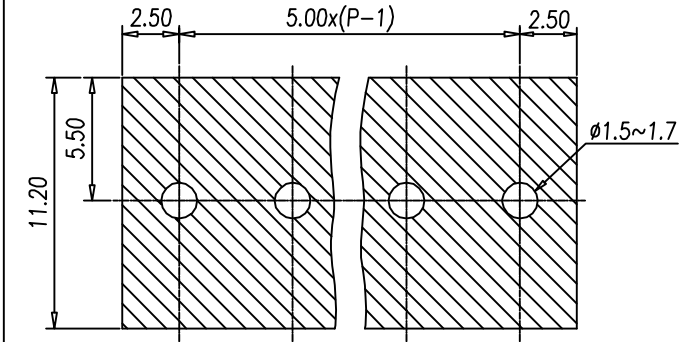
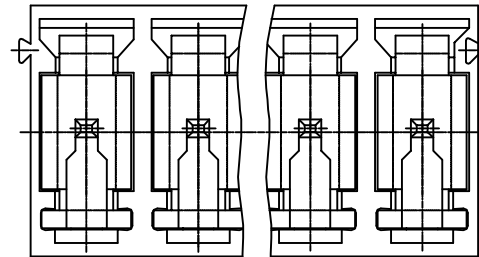
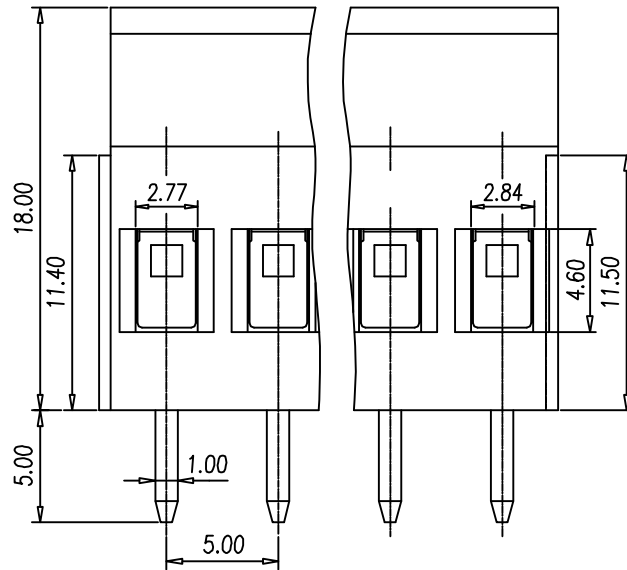
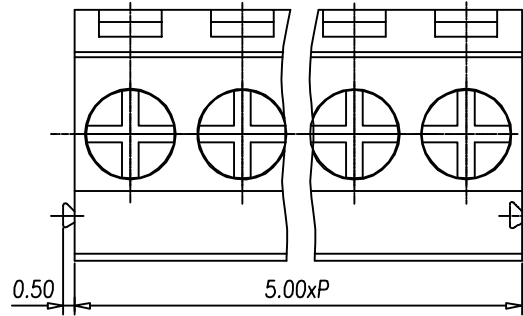


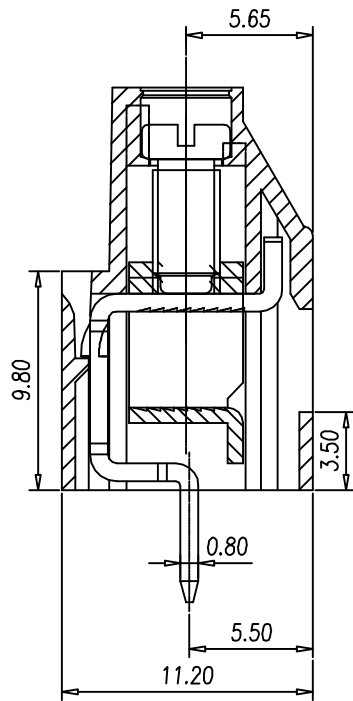


P.C.B. LAYOUT

NOTES:

1. Rating: 250V 28A
PITCH: 5.00mm
2. Insulation Withstands Voltage:
AC 1500 V/MIN
3. Insulation Resistance:
PA= 500MΩ or more at DC500V
4. Using Temperature Range:
PA= -40°C~+105°C
5. Screw Torque Value: 4 kgf-cm
6. Suitable Electric Wire: AWG 24~12
7. Undimensioned Tolerances:

—	∠	∇	0.05/10
⊥	//	≡	0.2/10
PITCH ERROR			0.05/10
UNDIMENSIONED TOLERANCES			±0.3

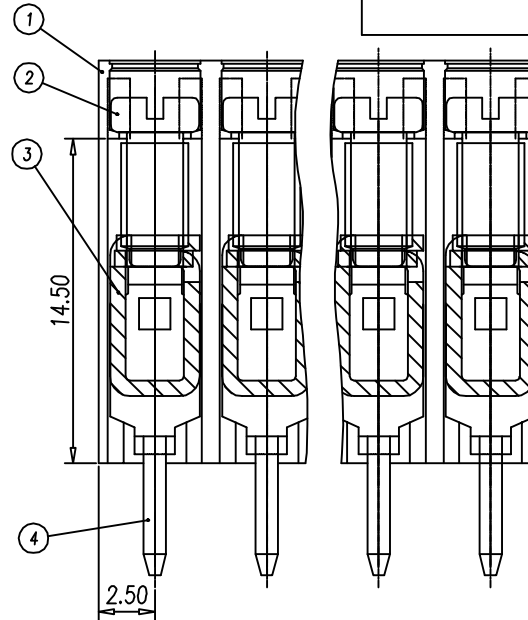

4	SOLDER PIN	0067B00100	P	BRASS	Ni Plated
3	WIRE CAGE	X000002200	P	STEEL	
2	SCREW	S000011100	P	STEEL	M2.5x0.4
1	HOUSING	0067C0XX00	1	PA66(V2)	G002
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DWG.	X.JF	DATE	03,02,16	UNITS	MM SHEET/OF 1/2
CHK.		DATE		SCALE	4:1 (:)
APP.		DATE		NAME	20.700M
				DWG NO.	SP-02

REV.	CONTENT	CHK.	DATE
------	---------	------	------

IMO