
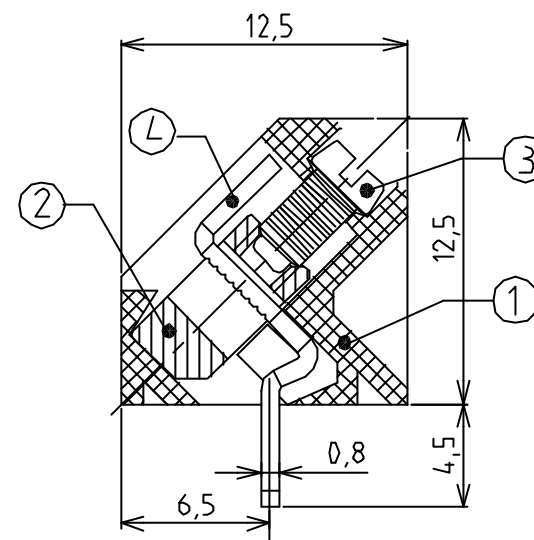


|           |  |
|-----------|--|
| used for: |  |
|-----------|--|

NOTES:

- 1.Rating:250V 16A;
- 2.Insulation Withstands Voltage:  
AC1500V/MIN
- 3.Insulation Resistance:  
100MΩ or more at DC500V
- 4.Using Temperature Range:  
-41°C--+115°C
- 5.Screw Torque Value:3.5kg·cm
- 6.Suitable Electric Wire:12-26 AWG

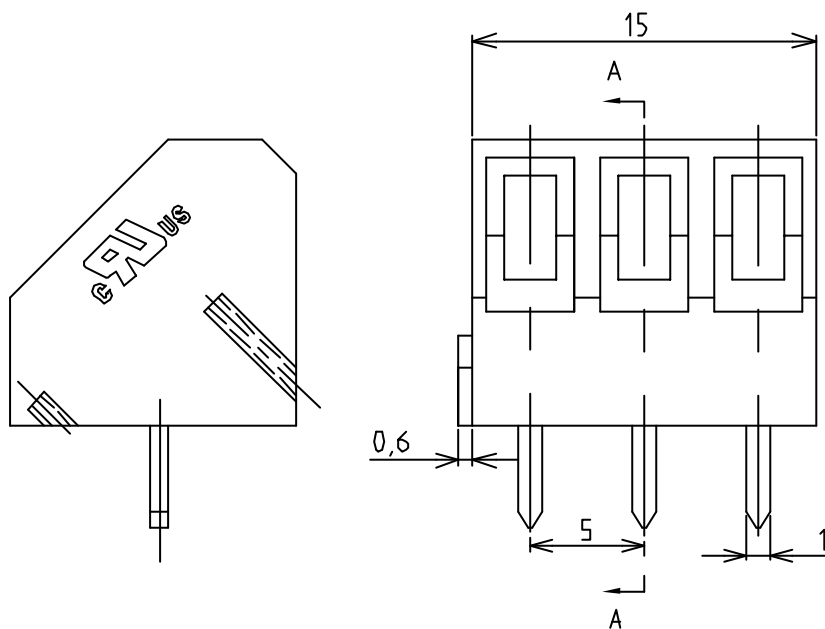

Section A--A

|      |              |              |            |          |                     |
|------|--------------|--------------|------------|----------|---------------------|
| 4    | Pin          | 1017ML111111 | 3          | HPb59-1  | Tin Plated          |
| 3    | Screw        | S011113811   | 3          | Steel    | m3<br>Zinc plated   |
| 2    | Block        | C1111113100  | 3          | HPb59-1  | Ni Plated           |
| 1    | Housing      | 0117P01410   | 1          | PBT G21  | UL94V-0             |
| ITEM | NAME OF PART | NO OF PART   | Q'TY       | MATERIAL | NOTE                |
| DWG. | CHENR        | DATE         | 2004/11/31 | UNITS    | MM                  |
| CHK. |              | DATE         |            | SCALE    | 3:1                 |
| APP. |              | DATE         |            |          |                     |
|      |              |              |            | NAME     | 20.300M (LEAD FREE) |
|      |              |              |            | DWG NO.  |                     |

| A            | Pitch range in mm | Nominal dimension size | radius   | chamfer         | sloper angle side | / = - □ //                 |
|--------------|-------------------|------------------------|----------|-----------------|-------------------|----------------------------|
| 2<br>to<br>8 | 0<br>16           | 16<br>26               | 3d<br>3d | over 15<br>to 6 | over 12<br>to 18  | all all                    |
| ± 0.18       | ± 0.13            | ± 0.17                 | ± 0.28   | ± 0.1           | ± 0.2             | ± 0.5 ± 0.125 ± 0.25 ± 0.4 |