
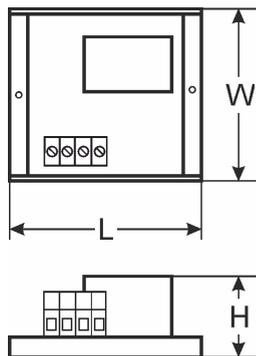


CODE: **AWZ533** v.2.1/VI  
NAME: **LB4P/4x1,5A/FTA fuse module**

EN\*\*

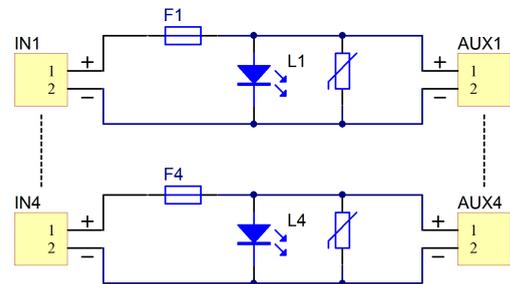

### DESCRIPTION

The LB4P/4x1.5A/FTA fuse module is designed for power distribution in low-voltage systems requiring voltage of 10V÷30V DC or 10V÷24V AC (e.g. buffer power supply, transformer etc.). It has 4 independent, galvanically isolated power supply circuits protected with 1,5A fuses. Fuse activation is indicated by switching off the appropriate LED: L1 for AUX1, L2 for AUX2 etc. Additionally, each output is protected with a varistor protecting the power supply and receivers against surges in the supply system. The module is adapted for connection of wires with a maximum cross-section of 1mm<sup>2</sup>.

### SPECIFICATIONS

Supply voltage	10V ÷ 30V DC (-2%/+2%) 10V ÷ 24V AC (-2%/+2%)
Output voltage	$U_{AUX} = U_{IN}$ ( equal to supply voltage )
Current consumption	5 mA ÷ 30 mA @ $U_{IN} = 10V \div 30V$ DC
Number of power inputs	4 (IN terminals) – max. 1mm <sup>2</sup> cable
Number of power outputs	4 (AUX terminals) – max. 1mm <sup>2</sup> cable
Protections against:	
- a short circuit SCP	- 4 x 1,5A
- an overload OLP	- 4 x 1,5A
- a surge	- varistors
LED indication	Green L1 ÷ L4 LEDs – AUX1 ÷ AUX4 output status
Fuses F1 ÷ F4	F 1,5A
Operating conditions	II environmental class, -10°C ÷ 50°C
Dimensions	L=100, W=43, H=20 (+/-2mm)
Installation	A mounting panel with an adhesive tape, mounting screws x2 (holes Ø 3mm)
Connectors	Φ0,41÷1,63 (AWG 26-14), 0,2 ÷ 1mm <sup>2</sup>
Net/gross weight	0,05kg / 0,08kg
Declarations, warranty	CE, 2 year from the production date