

### 3. General use FC, FA, FB

Japan  
China




#### ■ Features

- General use wire wound and resin molded chip inductor.
- Correspond to Re-flowsoldering and flow soldering.
- Wide line-up from 2520 size to 4532 size.
- Good for mounting.

#### ■ Recommended Applications

- AV equipment, Wireless communication equipment and various general electronic equipment.

#### ■ Explanation of Part Numbers

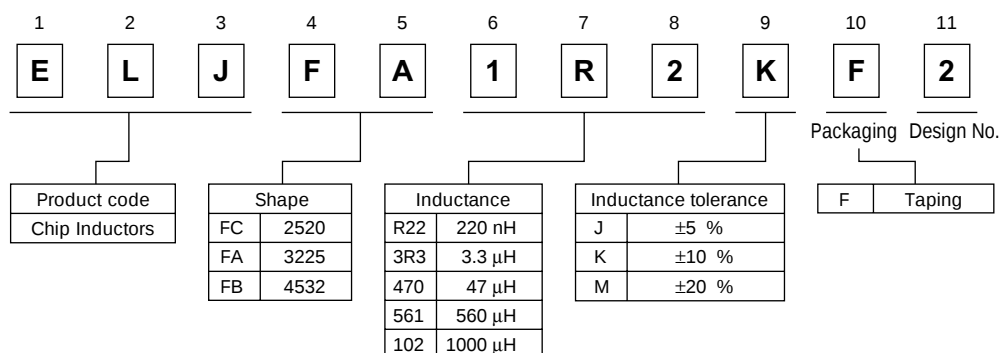

#### ■ Storage condition

- Package : Normal temperature (−5 to 35 °C), normal humidity (85 %RH Max.), shall not be exposed to direct sunlight and harmful gas and care should be taken so as not to cause dew.
- Product on PWB: Temperature −20 to +85 °C

#### ■ Storage period

- In generally, even if storage condition is good, solderability will be down cause of time progress.  
Please use product within 6 months after received.  
(In case of over 6 months storage period, use the product after confirmation of no abnormality of appearance and solderability.)


■ Packaging Refer 28 ro 29 page.

■ Soldering condition Refer 30 page.


■ Caution for use Refer 31 page.

### ■ FC Type 2520 (1008)

● Dimensions in mm (not to scale)

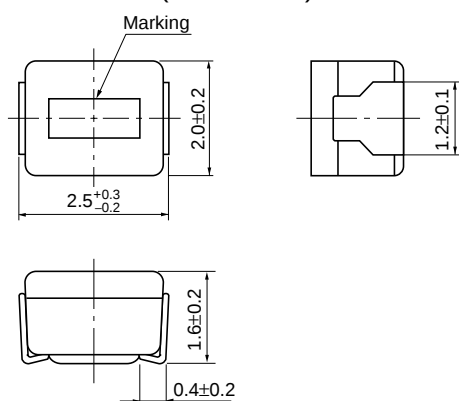

● Recommended Land Pattern in mm (not to scale)

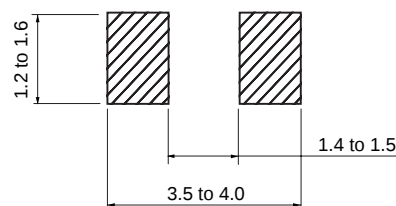

■ Standard Packing Quantity

● 2000 pcs./Reel



### ■ Standard Parts

| Part No.   | Inductance |                              |                     | Q    |                     | SRF *1<br>(MHz) min. | R <sub>DC</sub> *2<br>(Ω) max. | DC Current<br>(mA) max. |
|------------|------------|------------------------------|---------------------|------|---------------------|----------------------|--------------------------------|-------------------------|
|            | (μH)       | Tolerance<br>(%)             | Test Freq.<br>(MHz) | min. | Test Freq.<br>(MHz) |                      |                                |                         |
| ELJFCR22□F | 0.22       | M : ±20 %<br>or<br>K : ±10 % | 25.2                | 25   | 25.2                | 230                  | 0.70                           | 190                     |
| ELJFCR27□F | 0.27       |                              |                     |      |                     | 210                  | 0.75                           | 180                     |
| ELJFCR33□F | 0.33       |                              |                     |      |                     | 190                  | 0.85                           | 170                     |
| ELJFCR39□F | 0.39       |                              |                     |      |                     | 175                  | 0.95                           | 160                     |
| ELJFCR47□F | 0.47       |                              |                     |      |                     | 160                  | 1.00                           | 155                     |
| ELJFCR56□F | 0.56       |                              |                     |      |                     | 155                  | 1.10                           | 150                     |
| ELJFCR68□F | 0.68       |                              |                     |      |                     | 135                  | 1.25                           | 140                     |
| ELJFCR82□F | 0.82       |                              |                     |      |                     | 125                  | 1.40                           | 130                     |
| ELJFC1R0□F | 1.0        | K : ±10 %<br>or<br>J : ±5 %  | 7.96                | 25   | 7.96                | 115                  | 0.65                           | 195                     |
| ELJFC1R2□F | 1.2        |                              |                     |      |                     | 100                  | 0.75                           | 180                     |
| ELJFC1R5□F | 1.5        |                              |                     |      |                     | 90                   | 0.85                           | 170                     |
| ELJFC1R8□F | 1.8        |                              |                     |      |                     | 85                   | 0.95                           | 160                     |
| ELJFC2R2□F | 2.2        |                              |                     |      |                     | 80                   | 1.05                           | 155                     |
| ELJFC2R7□F | 2.7        |                              |                     |      |                     | 75                   | 1.20                           | 145                     |
| ELJFC3R3□F | 3.3        |                              |                     |      |                     | 65                   | 1.30                           | 135                     |
| ELJFC3R9□F | 3.9        |                              |                     |      |                     | 60                   | 1.40                           | 130                     |
| ELJFC4R7□F | 4.7        |                              |                     |      |                     | 55                   | 1.55                           | 125                     |
| ELJFC5R6□F | 5.6        |                              |                     |      |                     | 50                   | 1.75                           | 120                     |
| ELJFC6R8□F | 6.8        |                              |                     |      |                     | 45                   | 1.95                           | 115                     |
| ELJFC8R2□F | 8.2        |                              |                     |      |                     | 40                   | 2.20                           | 105                     |
| ELJFC100□F | 10         |                              | 2.52                | 20   | 2.52                | 32                   | 3.70                           | 80                      |
| ELJFC120□F | 12         |                              |                     |      |                     | 30                   | 4.10                           | 75                      |
| ELJFC150□F | 15         |                              |                     |      |                     | 28                   | 5.00                           | 70                      |
| ELJFC180□F | 18         |                              |                     |      |                     | 25                   | 5.40                           | 65                      |
| ELJFC220□F | 22         |                              |                     |      |                     | 22                   | 6.00                           | 60                      |
| ELJFC270□F | 27         |                              |                     |      |                     | 21                   | 6.30                           | 115                     |
| ELJFC330□F | 33         |                              |                     |      |                     | 20                   | 7.10                           | 110                     |
| ELJFC390□F | 39         |                              |                     |      |                     | 18                   | 9.50                           | 90                      |
| ELJFC470□F | 47         |                              |                     |      |                     | 17                   | 11.0                           | 80                      |
| ELJFC560□F | 56         |                              |                     |      |                     | 16                   | 12.1                           | 75                      |
| ELJFC680□F | 68         |                              |                     |      |                     | 15                   | 16.6                           | 70                      |
| ELJFC820□F | 82         |                              |                     |      |                     | 13                   | 19.0                           | 65                      |
| ELJFC101□F | 100        |                              | 0.796               | 15   | 0.796               | 12                   | 21.0                           | 60                      |


□ : Symbol of Tolerance \*1 : Self Resonant Frequency \*2 : DC Resistance

### ■ FA Type 3225 (1210)

● Dimensions in mm (not to scale)

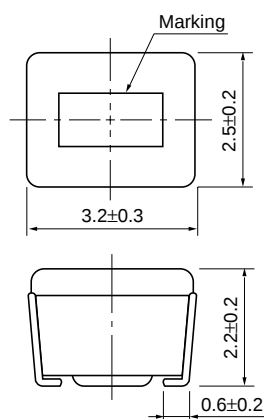

● Recommended Land Pattern in mm (not to scale)

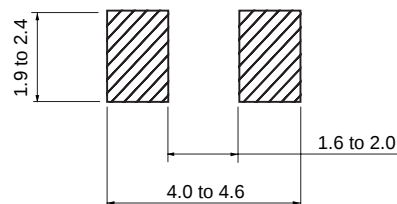

■ Standard Packing Quantity

● 2000 pcs./Reel



### ■ Standard Parts

| Part No.    | Inductance |                                      |                     | Q    |                     | SRF *1<br>(MHz) min. | R <sub>DC</sub> *2<br>(Ω) max. | DC Current<br>(mA) max. |    |
|-------------|------------|--------------------------------------|---------------------|------|---------------------|----------------------|--------------------------------|-------------------------|----|
|             | (μH)       | Tolerance<br>(%)                     | Test Freq.<br>(MHz) | min. | Test Freq.<br>(MHz) |                      |                                |                         |    |
| ELJFAR22□F2 | 0.22       | M : ±20 %<br><br>or<br><br>K : ±10 % | 25.2                | 25   | 25.2                | 230                  | 0.29                           | 360                     |    |
| ELJFAR27□F2 | 0.27       |                                      |                     |      |                     | 210                  | 0.32                           | 345                     |    |
| ELJFAR33□F2 | 0.33       |                                      |                     |      |                     | 190                  | 0.35                           | 330                     |    |
| ELJFAR39□F2 | 0.39       |                                      |                     |      |                     | 175                  | 0.39                           | 305                     |    |
| ELJFAR47□F2 | 0.47       |                                      |                     |      |                     | 160                  | 0.44                           | 290                     |    |
| ELJFAR56□F2 | 0.56       |                                      |                     |      |                     | 150                  | 0.49                           | 275                     |    |
| ELJFAR68□F2 | 0.68       |                                      |                     |      |                     | 135                  | 0.55                           | 260                     |    |
| ELJFAR82□F2 | 0.82       |                                      |                     |      |                     | 125                  | 0.61                           | 245                     |    |
| ELJFA1R0□F2 | 1.0        | K : ±10 %<br><br>or<br><br>J : ± 5 % | 7.96                | 30   | 7.96                | 115                  | 0.69                           | 230                     |    |
| ELJFA1R2□F2 | 1.2        |                                      |                     |      |                     | 100                  | 0.75                           | 215                     |    |
| ELJFA1R5□F  | 1.5        |                                      |                     |      |                     | 90                   | 0.75                           | 210                     |    |
| ELJFA1R8□F  | 1.8        |                                      |                     |      |                     | 85                   | 0.82                           | 200                     |    |
| ELJFA2R2□F  | 2.2        |                                      |                     |      |                     | 80                   | 0.95                           | 190                     |    |
| ELJFA2R7□F  | 2.7        |                                      |                     |      |                     | 75                   | 1.1                            | 180                     |    |
| ELJFA3R3□F  | 3.3        |                                      |                     |      |                     | 65                   | 1.2                            | 180                     |    |
| ELJFA3R9□F  | 3.9        |                                      |                     |      |                     | 60                   | 1.3                            | 175                     |    |
| ELJFA4R7□F  | 4.7        |                                      |                     |      |                     | 55                   | 1.5                            | 165                     |    |
| ELJFA5R6□F  | 5.6        |                                      |                     |      |                     | 50                   | 1.6                            | 160                     |    |
| ELJFA6R8□F  | 6.8        |                                      |                     |      |                     | 45                   | 1.8                            | 150                     |    |
| ELJFA8R2□F  | 8.2        |                                      |                     |      |                     | 40                   | 2.0                            | 140                     |    |
| ELJFA100□F  | 10         |                                      | 2.52                |      | 2.52                | 36                   | 2.1                            | 140                     |    |
| ELJFA120□F  | 12         |                                      |                     |      |                     | 33                   | 2.5                            | 125                     |    |
| ELJFA150□F  | 15         |                                      |                     |      |                     | 30                   | 2.8                            | 120                     |    |
| ELJFA180□F  | 18         |                                      |                     |      |                     | 27                   | 3.3                            | 110                     |    |
| ELJFA220□F  | 22         |                                      |                     |      |                     | 25                   | 3.7                            | 105                     |    |
| ELJFA270□F  | 27         |                                      |                     |      |                     | 22                   | 5.0                            | 90                      |    |
| ELJFA330□F  | 33         |                                      |                     |      |                     | 20                   | 5.6                            | 85                      |    |
| ELJFA390□F  | 39         |                                      |                     |      |                     | 20                   | 6.4                            | 80                      |    |
| ELJFA470□F  | 47         |                                      |                     |      |                     | 15                   | 7.0                            | 75                      |    |
| ELJFA560□F  | 56         |                                      |                     |      |                     | 15                   | 8.0                            | 70                      |    |
| ELJFA680□F  | 68         |                                      | 15                  | 9.0  |                     | 65                   |                                |                         |    |
| ELJFA820□F  | 82         |                                      | 10                  | 10.0 |                     | 60                   |                                |                         |    |
| ELJFA101□F  | 100        |                                      | 0.796               | 20   |                     | 0.796                | 10                             | 10.0                    | 60 |
| ELJFA121□F  | 120        |                                      |                     |      |                     |                      | 10                             | 11.0                    | 55 |
| ELJFA151□F  | 150        |                                      |                     |      |                     |                      | 8                              | 15.0                    | 50 |
| ELJFA181□F  | 180        |                                      |                     |      |                     |                      | 7                              | 17.0                    | 50 |
| ELJFA221□F  | 220        |                                      |                     |      |                     |                      | 7                              | 21.0                    | 45 |


□ : Symbol of Tolerance    \*1 : Self Resonant Frequency    \*2 : DC Resistance

### ■ FB Type 4532 (1812)

● Dimensions in mm (not to scale)

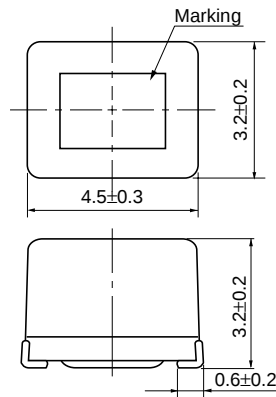

● Recommended Land Pattern in mm (not to scale)

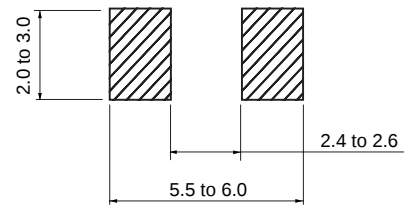

■ Standard Packing Quantity

● 500 pcs./Reel

### ■ Standard Parts

| Part No.   | Inductance |                            |                     | Q    |                     | SRF *1<br>(MHz) min. | R <sub>DC</sub> *2<br>(Ω) max. | DC Current<br>(mA) max. |
|------------|------------|----------------------------|---------------------|------|---------------------|----------------------|--------------------------------|-------------------------|
|            | (μH)       | Tolerance<br>(%)           | Test Freq.<br>(MHz) | min. | Test Freq.<br>(MHz) |                      |                                |                         |
| ELJFBR22□F | 0.22       | M : ±20 %                  | 1.0                 | 30   | 25.2                | 230                  | 0.30                           | 700                     |
| ELJFBR27□F | 0.27       |                            |                     |      |                     | 200                  | 0.32                           | 650                     |
| ELJFBR33□F | 0.33       |                            |                     |      |                     | 180                  | 0.35                           | 630                     |
| ELJFBR39□F | 0.39       |                            |                     |      |                     | 155                  | 0.37                           | 620                     |
| ELJFBR47□F | 0.47       |                            |                     |      |                     | 135                  | 0.40                           | 580                     |
| ELJFBR56□F | 0.56       |                            |                     |      |                     | 120                  | 0.42                           | 560                     |
| ELJFBR68□F | 0.68       |                            |                     |      |                     | 105                  | 0.48                           | 530                     |
| ELJFBR82□F | 0.82       |                            |                     |      |                     | 90                   | 0.50                           | 500                     |
| ELJFB1R0□F | 1.0        | M:±20 %<br>or<br>K : ±10 % |                     | 50   | 7.96                | 80                   | 0.52                           | 470                     |
| ELJFB1R2□F | 1.2        |                            |                     |      |                     | 70                   | 0.55                           | 460                     |
| ELJFB1R5□F | 1.5        |                            |                     |      |                     | 60                   | 0.61                           | 430                     |
| ELJFB1R8□F | 1.8        |                            |                     |      |                     | 50                   | 0.61                           | 410                     |
| ELJFB2R2□F | 2.2        |                            |                     |      |                     | 45                   | 0.61                           | 410                     |
| ELJFB2R7□F | 2.7        |                            |                     |      |                     | 43                   | 0.61                           | 400                     |
| ELJFB3R3□F | 3.3        |                            |                     |      |                     | 39                   | 0.66                           | 380                     |
| ELJFB3R9□F | 3.9        |                            |                     |      |                     | 36                   | 0.74                           | 360                     |
| ELJFB4R7□F | 4.7        |                            |                     | 5    | 33                  | 0.81                 | 350                            |                         |
| ELJFB5R6□F | 5.6        |                            |                     |      | 30                  | 0.88                 | 330                            |                         |
| ELJFB6R8□F | 6.8        |                            |                     |      | 26                  | 1.0                  | 310                            |                         |
| ELJFB8R2□F | 8.2        |                            |                     |      | 24                  | 1.6                  | 250                            |                         |
| ELJFB100□F | 10         |                            |                     |      | 22                  | 1.8                  | 235                            |                         |
| ELJFB120□F | 12         |                            |                     |      | 20                  | 1.9                  | 225                            |                         |
| ELJFB150□F | 15         |                            |                     |      | 18                  | 2.1                  | 215                            |                         |
| ELJFB180□F | 18         |                            |                     |      | 16                  | 2.3                  | 205                            |                         |
| ELJFB220□F | 22         | 2.52                       |                     | 15   | 2.6                 | 195                  |                                |                         |
| ELJFB270□F | 27         |                            |                     | 13   | 2.9                 | 185                  |                                |                         |
| ELJFB330□F | 33         |                            |                     | 12   | 3.1                 | 175                  |                                |                         |
| ELJFB390□F | 39         |                            |                     | 10   | 3.6                 | 165                  |                                |                         |
| ELJFB470□F | 47         |                            |                     | 9.7  | 4.2                 | 130                  |                                |                         |
| ELJFB560□F | 56         |                            |                     | 9.0  | 4.7                 | 125                  |                                |                         |
| ELJFB680□F | 68         |                            |                     | 8.2  | 5.3                 | 115                  |                                |                         |
| ELJFB820□F | 82         |                            |                     | 7.5  | 5.9                 | 110                  |                                |                         |
| ELJFB101□F | 100        |                            | 0.1                 | 40   | 1.5                 | 6.7                  | 8.8                            | 105                     |
| ELJFB121□F | 120        |                            |                     |      |                     | 6.1                  | 10                             | 100                     |
| ELJFB151□F | 150        |                            |                     |      |                     | 5.5                  | 11                             | 95                      |
| ELJFB181□F | 180        |                            |                     |      | 5.1                 | 13                   | 85                             |                         |
| ELJFB221□F | 220        |                            |                     |      | 0.796               | 4.5                  | 13                             | 85                      |
| ELJFB271□F | 270        |                            |                     |      |                     | 4.1                  | 14                             | 80                      |
| ELJFB331□F | 330        |                            |                     | 3.7  |                     | 16                   | 75                             |                         |
| ELJFB391□F | 390        |                            |                     | 3.3  |                     | 19                   | 70                             |                         |
| ELJFB471□F | 470        | 3.3                        |                     | 31   |                     | 55                   |                                |                         |
| ELJFB561□F | 560        | 2.7                        |                     | 35   |                     | 50                   |                                |                         |
| ELJFB681□F | 680        | 30                         |                     | 2.5  |                     | 39                   | 50                             |                         |
| ELJFB821□F | 820        |                            |                     | 2.4  | 45                  | 45                   |                                |                         |
| ELJFB102□F | 1000       |                            |                     | 2.1  | 53                  | 40                   |                                |                         |

□ : Symbol of Tolerance \*1 : Self Resonant Frequency \*2 : DC Resistance