

**RIDERSERIES RCI
SRC-I QV S****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 1429-0

Fax: +49 5231 14292083

www.weidmueller.com



Cross-connector for bridging connections in the
RIDERSERIES RCI

General ordering data

Type	SRC-I QV S
Order No.	1132070000
Version	RIDERSERIES RCI, Cross-connector
GTIN (EAN)	4032248912087
Qty.	10 pc(s).

**RIDERSERIES RCI
SRC-I QV S**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 1429-0
 Fax: +49 5231 14292083
 www.weidmueller.com

Technical data
Dimensions and weights

Net weight 6.7 g

Temperatures

Operating temperature -40 °C...85 °C Storage temperature -40 °C...85 °C

Cross-connection data

Rated current	12 A	Insulation	Yes
Electric shock protection	Yes	Colour	White
No. of cross-connected terminals	8	Pitch in mm (P)	15.2 mm
Version	can be cut to length		

General data

Version can be cut to length

Connection data

Pitch in mm (P) 15.2 mm

Classifications

ETIM 4.0	EC000489	ETIM 5.0	EC002586
ETIM 6.0	EC002586	eClass 6.2	27-14-11-40
eClass 7.1	27-37-92-08	eClass 8.1	27-37-92-08
eClass 9.0	27-37-16-92	eClass 9.1	27-37-16-92

Approvals

Approvals



ROHS Conform

Downloads

Brochure/Catalogue	CAT 4.2 ELECTR 15/16 EN
Engineering Data	EPLAN, WSCAD


RIDERSERIES RCI SRC-I QV S

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 1429-0
Fax: +49 5231 14292083
www.weidmueller.com

Drawings

Example of use


How to install cross connection

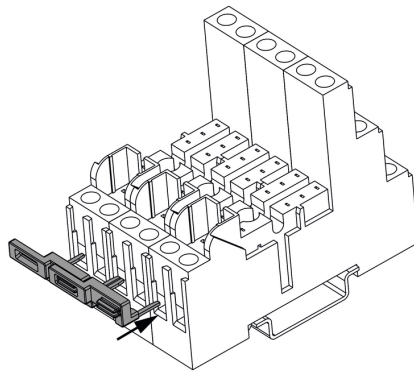

Plug the cross connection into wire-connection opening
and fix it with tighten the screw

Detailed drawing

Example of use

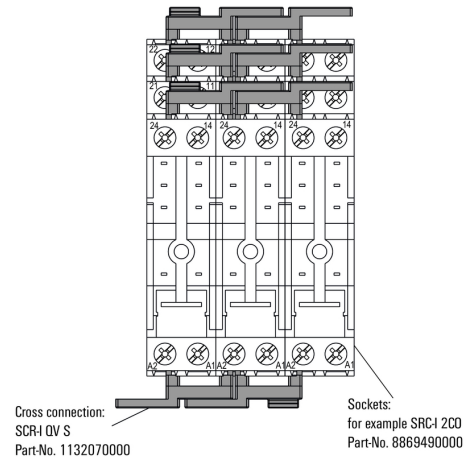

Cross-connector bridges to the same
connection on the neighbouring base