Notice for TAIYO YUDEN products

Please read this notice before using the TAIYO YUDEN products.

PREMINDERS

Product information in this catalog is as of October 2014. All of the contents specified herein are subject to change without notice due to technical improvements, etc. Therefore, please check for the latest information carefully before practical application or usage of the Products.

Please note that TAIYO YUDEN CO., LTD. shall not be responsible for any defects in products or equipment incorporating such products, which are caused under the conditions other than those specified in this catalog or individual specification.

- Please contact TAIYO YUDEN CO., LTD. for further details of product specifications as the individual specification is available.
- Please conduct validation and verification of products in actual condition of mounting and operating environment before commercial shipment of the equipment.
- All electronic components or functional modules listed in this catalog are developed, designed and intended for use in general electronics equipment.(for AV, office automation, household, office supply, information service, telecommunications, (such as mobile phone or PC) etc.). Before incorporating the components or devices into any equipment in the field such as transportation,(automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network (telephone exchange, base station) etc. which may have direct influence to harm or injure a human body, please contact TAIYO YUDEN CO., LTD. for more detail in advance.

Do not incorporate the products into any equipment in fields such as aerospace, aviation, nuclear control, submarine system, military, etc. where higher safety and reliability are especially required.

In addition, even electronic components or functional modules that are used for the general electronic equipment, if the equipment or the electric circuit require high safety or reliability function or performances, a sufficient reliability evaluation check for safety shall be performed before commercial shipment and moreover, due consideration to install a protective circuit is strongly recommended at customer's design stage.

- The contents of this catalog are applicable to the products which are purchased from our sales offices or distributors (so called "TAIYO YUDEN's official sales channel").
 - It is only applicable to the products purchased from any of TAIYO YUDEN's official sales channel.
- Please note that TAIYO YUDEN CO., LTD. shall have no responsibility for any controversies or disputes that may occur in connection with a third party's intellectual property rights and other related rights arising from your usage of products in this catalog. TAIYO YUDEN CO., LTD. grants no license for such rights.
- Caution for export

Certain items in this catalog may require specific procedures for export according to "Foreign Exchange and Foreign Trade Control Law" of Japan, "U.S. Export Administration Regulations", and other applicable regulations. Should you have any question or inquiry on this matter, please contact our sales staff.

WIRE-WOUND CHIP POWER INDUCTORS(CB SERIES)






REFLOW

■PARTS NUMBER

*Operating Temp. : -40~+105°C (Including self-generated heat)



(1)Series	name

Code	Series name
СВ	Wound chip power inductor

2 Characteristics

Code	Characteristics
ΔΔ	Standard
ΔC	High current
ΔL	Low profile
MF	Low loss

③Dimensions (L×W)

Code	Type (inch)	Dimensions (L×W) [mm]
1608	1608(0603)	1.6 × 0.8
2012	2012 (0805)	2.0 × 1.25
2016	2016(0806)	2.0 × 1.6
2518	2518(1007)	2.5 × 1.8
3225	3225(1210)	3.2×2.5

4 Packaging

Code	Packaging
Т	Taping

5 Nominal inductance

O	
Code (example)	Nominal inductance[μ H]
1R0	1.0
100	10
101	100

※R=Decimal point

6 Inductance tolerance


Code	Inductance tolerance			
K	±10%			
М	±20%			

(7)Special code

O-1	
Code	Special code
Δ	Standard
R	Low Rdc type

®Internal code


■ STANDARD EXTERNAL DIMENSIONS / STANDARD QUANTITY



Recommended Land Patterns

Surface Mounting

- •Mounting and soldering conditions should be checked beforehand.
- •Applicable soldering process to these products is reflow soldering only.



Туре	Α	В	С
MF1608	0.55	0.7	1.0
2012	0.60	1.0	1.45
2016	0.60	1.0	1.8
2518	0.60	1.5	2.0
3225	0.85	1.7	2.7
•	•		Unit:mm

Туре		14/	т		Standard quantity [pcs]		
туре	L	W	'	е	Paper tape	Embossed tape	
001454000	1.6±0.2	0.8±0.2	0.8 ± 0.2	0.45±0.15		3000	
CBMF1608	(0.063 ± 0.008)	(0.031 ± 0.008)	(0.031 ± 0.008)	(0.016 ± 0.006)	_	3000	
CB L2012	2.0 ± 0.2	1.25±0.2	0.9 ± 0.1	0.5 ± 0.2	4000		
CB LZUIZ	(0.079 ± 0.008)	(0.049 ± 0.008)	(0.035 ± 0.004)	(0.020 ± 0.008)	4000	_	
CB 2012	2.0 ± 0.2	1.25±0.2	1.25±0.2	0.5 ± 0.2		3000	
CB C2012	(0.079 ± 0.008)	(0.049 ± 0.008)	(0.049 ± 0.008)	(0.020 ± 0.008)	_	3000	
CB 2016	2.0 ± 0.2	1.6±0.2	1.6±0.2	0.5 ± 0.2		2000	
CB C2016	(0.079 ± 0.008)	(0.063 ± 0.008)	(0.063 ± 0.008)	(0.020 ± 0.008)	_	2000	
CB 2518	2.5±0.2	1.8±0.2	1.8±0.2	0.5±0.2		2000	
CB C2518	(0.098 ± 0.008)	(0.071 ± 0.008)	(0.071 ± 0.008)	(0.020 ± 0.008)	_	2000	
OD COORE	3.2±0.2	2.5±0.2	2.5±0.2	0.6±0.3		1000	
CB C3225	(0.126 ± 0.008)	(0.098 ± 0.008)	(0.098 ± 0.008)	(0.024 ± 0.012)	_	1000	
						Unit:mm(inch)	

[▶] This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (http://www.ty-top.com/) .

■1608(0603)type

Parts number	EHS	Nominal inductance [μ H]	Inductance tolerance	Self-resonant frequency [MHz] (min.)	DC Resistance [Ω]($\pm 30\%$)	Rated current ※)[mA]		Measuring
						Saturation current Idc1	Temperature rise current Idc2	frequency[MHz]
CBMF1608T1R0M	RoHS	1.0	±20%	100	0.09	290	770	7.96
CBMF1608T2R2M	RoHS	2.2	±20%	80	0.17	190	560	7.96
CBMF1608T3R3M	RoHS	3.3	±20%	60	0.22	170	500	7.96
CBMF1608T4R7M	RoHS	4.7	±20%	45	0.24	145	470	7.96
CBMF1608T100[]	RoHS	10	±10%, ±20%	32	0.36	115	380	2.52
CBMF1608T220[]	RoHS	22	±10%, ±20%	16	1.0	70	230	2.52
CBMF1608T470[]	RoHS	47	±10%, ±20%	11	2.5	50	140	2.52

2012(0805)type

	EHS	Name to all the development		Self-resonant DO	DC Resistance	Rated current ※) [mA]		M
Parts number		Nominal inductance [μ H]	Inductance tolerance	frequency [MHz] (min.)	$[\Omega](\pm 30\%)$	Saturation current Idc1	Temperature rise current Idc2	Measuring frequency[MHz]
CB 2012T1R0M	RoHS	1.0	±20%	100	0.15	500	900	7.96
CB 2012T2R2M	RoHS	2.2	±20%	80	0.23	410	770	7.96
CB 2012T3R3M	RoHS	3.3	±20%	55	0.30	330	650	7.96
CB 2012T4R7M	RoHS	4.7	±20%	45	0.40	300	580	7.96
CB 2012T6R8M	RoHS	6.8	±20%	38	0.47	250	540	7.96
CB 2012T100□	RoHS	10	±10%, ±20%	32	0.70	190	440	2.52
CB 2012T100∏R	RoHS	10	±10%, ±20%	32	0.50	200	520	2.52
CB 2012T150[]	RoHS	15	±10%, ±20%	28	1.3	170	320	2.52
CB 2012T220□	RoHS	22	±10%, ±20%	16	1.7	135	280	2.52
CB 2012T470□	RoHS	47	±10%, ±20%	11	3.7	90	190	2.52
CB 2012T680[]	RoHS	68	±10%, ±20%	10	6.0	70	140	2.52
CB 2012T101[]	R₀HS	100	±10%, ±20%	8	7.0	60	130	0.796

	Nominal inducta			Self-resonant	DC Resistance	Rated curren	t ※)[mA]	Measuring
Parts number	EHS	[μ H]	Inductance tolerance	frequency [MHz] (min.)	$[\Omega](\pm 30\%)$	Saturation current Idc1	Temperature rise current Idc2	frequency[MHz]
CB C2012T1R0M	R₀HS	1.0	±20%	100	0.19	700	840	7.96
CB C2012T2R2M	R₀HS	2.2	±20%	70	0.33	530	640	7.96
CB C2012T4R7M	R₀HS	4.7	±20%	45	0.50	360	520	7.96
CB C2012T100[]	RoHS	10	±10%, ±20%	40	1.2	240	340	2.52
CB C2012T220[]	RoHS	22	±10%, ±20%	16	3.7	170	190	2.52
CB C2012T470[]	R₀HS	47	±10%, ±20%	11	5.8	120	150	2.52

	Nominal inductance			Self-resonant	DC Resistance	Rated curren	t ※)[mA]	Measuring	
Parts number	EHS	[μ H]	Inductance tolerance	frequency [MHz] (min.)	[Ω](±30%)	Saturation current Idc1	Temperature rise current Idc2	frequency[MHz]	
CB L2012T1R0M	RoHS	1.0	±20%	100	0.15	620	950	0.1	
CB L2012T2R2M	RoHS	2.2	±20%	80	0.39	440	590	0.1	
CB L2012T4R7M	RoHS	4.7	±20%	45	0.66	275	490	0.1	
CB L2012T100M	RoHS	10	±20%	32	1.0	205	370	0.1	
CB L2012T220M	RoHS	22	±20%	23	2.1	150	250	0.1	
CB L2012T470M	RoHS	47	±20%	11	4.2	100	140	0.1	

2016(0806)type

		Manada al Sankankana		Self-resonant	DC Resistance	Rated curren	t ※)[mA]	Measuring	
Parts number	EHS	Nominal inductance [μ H]	Inductance tolerance	frequency [MHz] (min.)	[Ω](±30%)	Saturation current Idc1	Temperature rise current Idc2	frequency[MHz]	
CB 2016T1R0M	RoHS	1.0	±20%	100	0.09	600	1,100	7.96	
CB 2016T1R5M	RoHS	1.5	±20%	80	0.11	550	1,000	7.96	
CB 2016T2R2M	RoHS	2.2	±20%	70	0.13	510	1,000	7.96	
CB 2016T3R3M	RoHS	3.3	±20%	55	0.20	400	800	7.96	
CB 2016T4R7M	RoHS	4.7	±20%	45	0.25	340	740	7.96	
CB 2016T6R8M	RoHS	6.8	±20%	38	0.35	300	600	7.96	
CB 2016T100□	RoHS	10	±10%, ±20%	32	0.50	250	520	2.52	
CB 2016T150□	RoHS	15	±10%, ±20%	28	0.70	210	440	2.52	
CB 2016T220□	RoHS	22	±10%, ±20%	16	1.0	165	370	2.52	
CB 2016T330□	RoHS	33	±10%, ±20%	14	1.7	130	270	2.52	
CB 2016T470□	R₀HS	47	±10%, ±20%	11	2.4	110	240	2.52	
CB 2016T680□	R ₀ HS	68	±10%, ±20%	10	3.0	90	210	2.52	
CB 2016T101[]	R ₀ HS	100	±10%, ±20%	8	4.5	70	170	0.796	

		Manada al Santa akan ar		Self-resonant	DC Resistance	Rated curren	t ※)[mA]	Measuring	
Parts number	EHS	Nominal inductance [μ H]	Inductance tolerance	frequency [MHz] (min.)	$[\Omega](\pm 30\%)$	Saturation current Idc1	Temperature rise current Idc2	frequency[MHz]	
CB C2016T1R0M	RoHS	1.0	±20%	100	0.10	1,100	1,100	7.96	
CB C2016T1R5M	RoHS	1.5	±20%	80	0.15	1,000	1,000	7.96	
CB C2016T2R2M	RoHS	2.2	±20%	70	0.20	750	720	7.96	
CB C2016T3R3M	RoHS	3.3	±20%	55	0.27	600	610	7.96	
CB C2016T4R7M	RoHS	4.7	±20%	45	0.37	550	530	7.96	
CB C2016T6R8M	RoHS	6.8	±20%	38	0.59	450	450	7.96	
CB C2016T100[]	RoHS	10	±10%, ±20%	32	0.82	380	350	2.52	
CB C2016T150[]	RoHS	15	±10%, ±20%	28	1.2	300	300	2.52	
CB C2016T220[]	RoHS	22	±10%, ±20%	16	1.8	250	240	2.52	
CB C2016T330□	RoHS	33	±10%, ±20%	14	2.8	220	220	2.52	
CB C2016T470□	RoHS	47	±10%, ±20%	11	4.3	150	150	2.52	
CB C2016T680[]	RoHS	68	±10%, ±20%	10	7.0	130	130	2.52	
CB C2016T101[]	RoHS	100	±10%, ±20%	8	8.0	110	110	0.796	

^{• ☐} Please specify the Inductance tolerance code (Kor M)

[%]) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%.(at 20°C)

^{**)} The temperature rise current value (Idc2) is the DC current value having temperature increase up to 40°C.(at 20°C)

[▶] This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (http://www.ty-top.com/) .

<u>2518(1007)</u>type

2010(1007) type		Name to all to decidence		Self-resonant	DC Resistance	Rated curren	t ※)[mA]	Measuring	
Parts number	EHS	Nominal inductance [μ H]	Inductance tolerance	frequency [MHz] (min.)	$[\Omega](\pm 30\%)$	Saturation current Idc1	Temperature rise current Idc2	frequency[MHz]	
CB 2518T1R0M	RoHS	1.0	±20%	100	0.06	1,200	1,500	7.96	
CB 2518T1R5M	RoHS	1.5	±20%	80	0.07	650	1,400	7.96	
CB 2518T2R2M	RoHS	2.2	±20%	68	0.09	510	1,300	7.96	
CB 2518T3R3M	RoHS	3.3	±20%	54	0.11	440	1,200	7.96	
CB 2518T4R7MR	RoHS	4.7	±20%	46	0.10	310	1,200	7.96	
CB 2518T4R7M	RoHS	4.7	±20%	46	0.13	340	1,100	7.96	
CB 2518T6R8M	RoHS	6.8	±20%	38	0.15	270	930	7.96	
CB 2518T100[]	RoHS	10	±10%, ±20%	30	0.25	250	820	2.52	
CB 2518T150[]	RoHS	15	±10%, ±20%	23	0.32	180	650	2.52	
CB 2518T220[]	RoHS	22	±10%, ±20%	19	0.50	165	580	2.52	
CB 2518T330□	RoHS	33	±10%, ±20%	15	0.70	130	460	2.52	
CB 2518T470□	RoHS	47	±10%, ±20%	12	0.95	110	420	2.52	
CB 2518T680□	RoHS	68	±10%, ±20%	9.5	1.5	70	310	2.52	
CB 2518T101[]	RoHS	100	±10%, ±20%	9.0	2.1	60	260	0.796	
CB 2518T151[]	RoHS	150	±10%, ±20%	7.0	3.2	55	210	0.796	
CB 2518T221[]	RoHS	220	±10%, ±20%	5.5	4.5	50	180	0.796	
CB 2518T331[]	RoHS	330	±10%, ±20%	4.5	7.0	40	140	0.796	
CB 2518T471[]	RoHS	470	±10%, ±20%	3.5	10	35	120	0.796	
CB 2518T681[]	RoHS	680	±10%, ±20%	3.0	17	30	90	0.796	
CB 2518T102[]	RoHS	1000	±10%, ±20%	2.4	24	25	75	0.252	

				Self-resonant		Rated curren	nt ※)[mA]	Measuring
Parts number	EHS	Nominal inductance [μ H]	Inductance tolerance	frequency [MHz] (min.)	DC Resistance [Ω](±30%)	Saturation current Idc1	Temperature rise current Idc2	frequency[MHz]
CB C2518T1R0M	RoHS	1.0	±20%	100	0.08	1,000	1,200	7.96
CB C2518T1R5M	RoHS	1.5	±20%	80	0.11	950	1,190	7.96
CB C2518T2R2M	RoHS	2.2	±20%	68	0.13	890	1,100	7.96
CB C2518T3R3M	RoHS	3.3	±20%	54	0.16	730	1,020	7.96
CB C2518T4R7M	RoHS	4.7	±20%	41	0.20	680	920	7.96
CB C2518T6R8M	RoHS	6.8	±20%	38	0.30	550	740	7.96
CB C2518T100[]	RoHS	10	±10%, ±20%	30	0.36	480	680	2.52
CB C2518T150[]	RoHS	15	±10%, ±20%	23	0.65	350	500	2.52
CB C2518T220[]	RoHS	22	±10%, ±20%	19	0.77	320	460	2.52
CB C2518T330□	RoHS	33	±10%, ±20%	15	1.5	270	320	2.52
CB C2518T470[]	RoHS	47	±10%, ±20%	12	1.9	240	290	2.52
CB C2518T680[]	RoHS	68	±10%, ±20%	9.5	2.8	200	200	2.52
CB C2518T101[]	RoHS	100	±10%, ±20%	9.0	3.7	160	170	0.796
CB C2518T151[]	RoHS	150	±10%, ±20%	7.0	6.1	140	130	0.796
CB C2518T221[]	RoHS	220	±10%, ±20%	5.5	8.4	115	110	0.796
CB C2518T331[]	RoHS	330	±10%, ±20%	4.5	12.3	100	90	0.796
CB C2518T471[]	RoHS	470	±10%, ±20%	3.5	22	80	70	0.796
CB C2518T681[]	RoHS	680	±10%, ±20%	3.0	28	65	60	0.796

3225(1210)type

		N		Self-resonant	BO B	Rated curren	t ※)[mA]	
Parts number	EHS	Nominal inductance [μ H]	Inductance tolerance	frequency [MHz] (min.)	DC Resistance [Ω](±30%)	Saturation current Idc1	Temperature rise current Idc2	Measuring frequency[MHz]
CB C3225T1R0MR	RoHS	1.0	±20%	250	0.055	2,000	1,440	0.1
CB C3225T1R5MR	RoHS	1.5	±20%	220	0.060	2,000	1,310	0.1
CB C3225T2R2MR	RoHS	2.2	±20%	190	0.080	2,000	1,130	0.1
CB C3225T3R3MR	RoHS	3.3	±20%	160	0.095	2,000	1,040	0.1
CB C3225T4R7MR	RoHS	4.7	±20%	70	0.100	1,250	1,010	0.1
CB C3225T6R8MR	RoHS	6.8	±20%	50	0.120	950	940	0.1
CB C3225T100∏R	RoHS	10	±10%, ±20%	23	0.133	900	900	0.1
CB C3225T150∏R	RoHS	15	±10%, ±20%	20	0.195	730	850	0.1
CB C3225T220∏R	RoHS	22	±10%, ±20%	17	0.27	620	780	0.1
CB C3225T330∏R	RoHS	33	±10%, ±20%	13	0.41	500	570	0.1
CB C3225T470∏R	RoHS	47	±10%, ±20%	10	0.67	390	480	0.1
CB C3225T680∏R	RoHS	68	±10%, ±20%	8.0	1.0	320	410	0.1
CB C3225T101∏R	RoHS	100	±10%, ±20%	6.0	1.4	270	340	0.1
CB C3225T221 ☐R	RoHS	220	±10%, ±20%	3.0	2.5	190	190	0.1
CB C3225T821∏R	RoHS	820	±10%, ±20%	1.8	12	110	110	0.1
CB C3225T102□R	RoHS	1000	±10%, ±20%	1.6	13	100	100	0.1

^{• ☐} Please specify the Inductance tolerance code(Kor M)

 $[\]mbox{\%}\mbox{)}$ The saturation current value(Idc1) is the DC current value having inductance decrease down to 30%.(at 20°C)

 $[\]mbox{\%}\mbox{)}$ The temperature rise current value(Idc2) is the DC current value having temperature increase up to 40°C.(at 20°C)


[▶] This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (http://www.ty-top.com/) .


WIRE-WOUND CHIP INDUCTORS (LB SERIES), WIRE-WOUND CHIP POWER INDUCTORS (CB SERIES), WIRE-WOUND CHIP INDUCTORS FOR SIGNAL LINES (LB SERIES M TYPE)


PACKAGING


1 Minimum Quantity Standard Quantity [pcs] Type Paper Tape Embossed Tape LB C3225 1000 CB C3225 LB 3218 2000 LB R2518 LB C2518 2000 LB 2518 CB 2518 CB C2518 LBM2016 LB C2016 LB 2016 2000 CB 2016 CB C2016 LB 2012 LB C2012 LB R2012 3000 CB 2012 CB C2012 CB L2012 4000 LB 1608 4000 LBMF1608 3000 CBMF1608

②Tape material

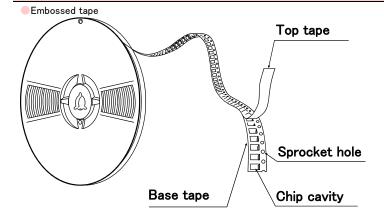




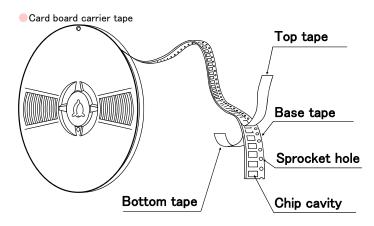



This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (http://www.ty-top.com/).


Embossed Tape (0.315 inches wide)



Т	Chip	cavity	Insertion pitch	Tape th	ickness
Туре	Α	В	F	Т	K
LBM2016	1.75±0.1	2.1±0.1	4.0±0.1	0.3±0.05	1.9max.
	(0.069±0.004)	(0.083±0.004)	(0.157±0.004)	(0.012±0.002)	(0.075max.)
LB C3225	2.8±0.1	3.5±0.1	4.0±0.1	0.3±0.05	4.0max.
CB C3225	(0.110±0.004)	(0.138±0.004)	(0.157±0.004)	(0.012±0.002)	(0.157max.)
LB 3218	2.1±0.1 3.5±0.1		4.0±0.1	0.3±0.05	2.2max.
	(0.083±0.004) (0.138±0.004)		(0.157±0.004)	(0.012±0.002)	(0.087max.)
LB 2518 CB 2518 LB C2518 CB C2518 LB R2518	2.15±0.1	2.7±0.1	4.0±0.1	0.3±0.05	2.2max.
	(0.085±0.004)	(0.106±0.004)	(0.157±0.004)	(0.012±0.002)	(0.087max.)
LB 2016 CB 2016 LB C2016 CB C2016	1.75±0.1 (0.069±0.004)	2.1±0.1 (0.083±0.004)	4.0±0.1 (0.157±0.004)	0.3±0.05 (0.012±0.002)	1.9max. (0.075max.)
LB 2012 CB 2012 LB C2012 CB C2012 LB R2012	1.45±0.1 (0.057±0.004)	2.25±0.1 (0.089±0.004)	4.0±0.1 (0.157±0.004)	0.25±0.05 (0.010±0.002)	1.45max. (0.057max.)
LBMF1608	1.1±0.1	1.9±0.1	4.0±0.1	0.25±0.05	1.2max.
CBMF1608	(0.043±0.004)	(0.075±0.004)	(0.157±0.004)	(0.010±0.002)	(0.047max.)

Unit:mm(inch)

Card board carrier tape (0.315 inches wide)




T	Chip	cavity	Insertion pitch	Tape thickness
Туре	Α	В	F	Т
CB L2012	1.55±0.1	2.3±0.1	4.0±0.1	1.1max.
OB LZUIZ	(0.061 ± 0.004)	(0.091 ± 0.004)	(0.157 ± 0.004)	(0.043max.)
LB 1608	1.0±0.1	1.8±0.1	4.0±0.1	1.1max.
LB 1608	(0.039 ± 0.004)	(0.071 ± 0.004)	(0.157 ± 0.004)	(0.043max.)


Unit:mm(inch)

This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (http://www.ty-top.com/).

4 Leader and Blank Portion

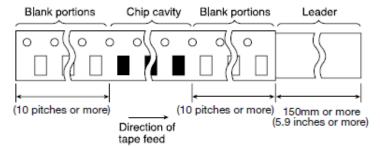


⑤Reel Size



©Top Tape Strength

The top tape requires a peel-off force 0.2 to 0.7N in the direction of the arrow as illustrated below.

Pull direction



This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (http://www.ty-top.com/).

WIRE-WOUND CHIP INDUCTORS (LB SERIES), WIRE-WOUND CHIP POWER INDUCTORS (CB SERIES), WIRE-WOUND CHIP INDUCTORS FOR SIGNAL LINES (LB SERIES M TYPE)

RELIABILITY DATA

1 Operation toward	ntura Panga				
1.Operating temper	-				
0 :5 1)/1	LB, LBC, LBR, LBMF Series	40 140500 (7 1 1 1 15 15 1 1 1 1 1 1 1 1 1 1 1 1 1			
Specified Value	CB, CBC, CBL, CBMF Series	$-40 \sim +105$ °C (Including self-generated heat)			
	LBM Series				
	- (2)				
2. Storage Tempera	ture Range (after soldering)				
	LB, LBC, LBR, LBMF Series				
Specified Value	CB, CBC, CBL, CBMF Series				
	LBM Series				
Test Methods and	LB, CB Series:				
Remarks	Please refer the term of "7. storage conditions" in precaution	ns.			
0.0					
3.Rated Current	10.100.100.100.0	T			
	LB, LBC, LBR, LBMF Series	Within the specified tolerance			
Specified Value	CB, CBC, CBL, CBMF Series				
	LBM Series				
4.Inductance					
	LB, LBC, LBR, LBMF Series				
Specified Value	CB, CBC, CBL, CBMF Series	Within the specified tolerance			
	LBM Series				
Test Methods and Remarks	LB·LBC·LBR·CB·CBC·CBL·LBMF·CBMF·LBM Series Measuring equipment :LCR Mater(HP4285A or its e	equivalent)			
5.Q					
	LB, LBC, LBR, LBMF Series				
Specified Value	CB, CBC, CBL, CBMF Series				
	LBM Series	Within the specified tolerance			
Test Methods and	LBM Series				
Remarks	Measuring equipment : LCR Mater(HP4285A or its eq	uivalent)			
6.DC Resisitance					
	LB, LBC, LBR, LBMF Series				
Specified Value	CB, CBC, CBL, CBMF Series	Within the specified tolerance			
	LBM Series				
Test Methods and Remarks	Measuring equipment : DC Ohmmeter (HIOKI 3227 or its equ	ivalent)			
7.Self-Resonant Fr	equency				
	LB, LBC, LBR, LBMF Series				
Specified Value	CB, CBC, CBL, CBMF Series	Within the specified tolerance			
	LBM Series]			
Test Methods and Remarks	Measuring equipment : Impedance analyzer (HP4291A or its	equivalent)			

This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (http://www.ty-top.com/).

8.Temperature Char	racteristic				
	LBM2016	6			Inductance change : Within±5%
	LB1608	LB2012	LBR2012 CB2012		12
	CBL2012	2 LB2016	CB2016	LB2518	8 Inductance change : Within±20%
Specified Value	LBR2518	B CB2518	LBC3225	CBC322	225
	LBMF160	08 CBMF1608	LBC2016	CBC201	
	LBC2518	B CBC2518	LB3218		Inductance change : Within±25%
	LBC2012	2 CBC2012			Inductance change : Within±35%
	Change of	of maximum inductan	ce deviation in	step 1-5	
	Step	Tempe	erature(°C)		
	Step	LB,	CB Series		
Test Methods and	1		20		
Remarks	2		-40		
	3	20(Referen	ce temperature	e)	
	4	+85(Maximum o	perating tempe	erature)	
	5		20		_

9.Rasistance to Fle	9.Rasistance to Flexure of Substrate							
	LB, LBC, LBR, LBMF Series							
Specified Value	CB, CBC, CBL, CBMF Series	No damage.						
	LBM Series							
Test Methods and Remarks	Warp : 2mm(LB·LBC·LBR·CB·CBC·CBL·LBM·L Test substrate : Board according to JIS C0051 Thickness : 0.8mm(LB·LBMF·CBMF1608) : 1.0mm(Others) Pressing jig 10 20 Board Board A5±2mm A5±2mm	BMF•CBMF Series)						

10.Body Strength			
Specified Value	LB, LBC, LBR, LBMF Series		
	CB, CBC, CBL, CBMF Series	No damage.	No damage.
	LBM Series		
Test Methods and Remarks	LB·LBC·LBR·CB·CBC·CBL·LBM Applied force : 10N Duration : 10sec. LB1608·LBMF1608·CBMF1608 Applied force : 5N Duration : 10sec.		

11.Adhesion of term	ninal electrode		
	LB, LBC, LBR, LBMF Series		No abnormality.
Specified Value	CB, CBC, CBL, CBMF Series		
	LBM Series		
Test Methods and Remarks		• CBC • CBL • LBM • LBMF • CBMF : 10N to X and Y directions : 5 sec. : Printed board 8 • LBMF1608 : 5N to X and Y directions : 5 sec. : Printed board	

This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (http://www.ty-top.com/).

12.Resistance to vil	oration		
	LB, LBC, LBR, LBMF Series	Inductance change : Within±10%	
Specified Value	CB, CBC, CBL, CBMF Series	No significant abnormality in appearance.	
	LBM Series	Inductance change : Within±5% No significant abnormality in appearance.	
Test Methods and Remarks	Vibration type : A Directions : 2 hrs Frequency range : 10 to Amplitude : 1.5m Mounting method : Solde	F*CBMF : According to JIS C5102 clause 8.2. (, Y and Z directions. Total : 6 hrs Hz(1min.) printed board of recovery under the standard condition after the test, followed by the measurement within 4	
Cassified Value	CB, CBC, CBL, CBMF Series		
Specified Value			
	LBM Series		
440 11 122			
14.Solderability	LD LDG LDG LDME G		
0 :5 11/1	LB, LBC, LBR, LBMF Series		
Specified Value	CB, CBC, CBL, CBMF Series	At least 90% of surface of terminal electrode is covered by new	
	LBM Series		
Test Methods and Remarks	LB · LBC · LBR · CB · CBC · CBL · I Solder temperature : 245 = Duration : 5±0 Flux : Meth	ion with 25% of colophony	
15.Resistance to so			
	LB, LBC, LBR, LBMF Series	Inductance change : Within±10%	
Specified Value	CB, CBC, CBL, CBMF Series		
	LBM Series	Inductance change : Within±5%	
Test Methods and Remarks	LB·LBC·LBR·CB·CBC·CBL·I 3 times of reflow oven at 230°	F • CBMF: · 40sec. with peak temperature at 260 °C for 5sec.	
16.Resisitance to se	olvent		
	LB, LBC, LBR, LBMF Series		
Specified Value	CB, CBC, CBL, CBMF Series	_	
	LBM Series		
Test Methods and Remarks	Solvent temperature : Roor Type of solvent : Isopr Cleaning conditions : 90s.		
17.Thermal shock			
. 7.1110111141 311001	LB. LBC, LBR, LBMF Series		
Specified Value	CB, CBC, CBL, CBMF Series	Inductance change : Within±10%	
opeomed value	No significant abnormality in appearance.		
	LBM Series LB·LBC·LBR·CB·CBC·CBL·LBM·LBMF·CBMF: -40~+85°C, maintain times 30min. ,100 cycle		
Test Methods and	1 D 1 DO 1 DD 65 656 651		

[▶] This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (http://www.ty-top.com/).

18.Damp heat life to	est		
		IF Series	
Specified Value	LB, LBC, LBR, LBMF Series CB, CBC, CBL, CBMF Series		Inductance change : Within±10%
	CB, CBC, CBL, CBMF Series LBM Series		No significant abnormality in appearance.
	Temperature	: 60±2°C	1
Test Methods and Remarks	Humidity	: 90 ~ 2 °C : 90 ~ 95%RH	
	Duration	: 1000 hrs	
	Recovery	: At least 2 hrs of recovery under the st	andard condition after the test, followed by the measurement within 48 hrs.
19.Loading under da			
	LB, LBC, LBR, LBMF Series		Inductance change : Within±10%
	CB, CBC, CBL, CBMF Series		No significant abnormality in appearance.
Specified Value	LBM Series		
Test Methods and	Temperature	: 60±2°C	
Remarks	Humidity Duration	: 90∼95%RH : 1000 hrs	
	Applied current	: Rated current	
	Recovery	: At least 2 hrs of recovery under the s	andard condition after the test, followed by the measurement within 48 hrs.
20.High temperature	e life test		
	LB, LBC, LBR, LBM		_
Specified Value	CB, CBC, CBL, CBI	MF Series	Inductance change : Within±10%
	LBM Series		No significant abnormality in appearance.
Test Methods and	Temperature	: 85±2°C	
Remarks	Duration Recovery	: 1000 hrs : At least 2 hrs of recovery under the si	andard condition after the test, followed by the measurement within 48 hrs.
		.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	
21.Loading at high t	temperature life test		
21.Loading at high t	temperature life test		Inductance change : Within±10%
21.Loading at high t	LB, LBC, LBR, LBM	IF Series	(LBC3225 Series : Within±20%)
21.Loading at high t	LB, LBC, LBR, LBM		_
	LB, LBC, LBR, LBM		(LBC3225 Series : Within±20%)
	LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series	MF Series	(LBC3225 Series : Within±20%)
Specified Value	LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature	MF Series : 85±2°C	(LBC3225 Series : Within±20%)
Specified Value Test Methods and	LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature Duration	MF Series : 85±2°C : 1000 hrs	(LBC3225 Series : Within±20%)
Specified Value	LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature	MF Series : 85±2°C : 1000 hrs : Rated current	(LBC3225 Series : Within±20%)
Specified Value Test Methods and	LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature Duration Applied current	MF Series : 85±2°C : 1000 hrs : Rated current	(LBC3225 Series : Within±20%) No significant abnormality in appearance. —
Specified Value Test Methods and	LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature Duration Applied current Recovery	MF Series : 85±2°C : 1000 hrs : Rated current	(LBC3225 Series : Within±20%) No significant abnormality in appearance. —
Specified Value Test Methods and Remarks	LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature Duration Applied current Recovery	MF Series : 85±2°C : 1000 hrs : Rated current : At least 2 hrs of recovery under the st	(LBC3225 Series : Within±20%) No significant abnormality in appearance. — andard condition after the test, followed by the measurement within 48 hrs.
Specified Value Test Methods and Remarks	LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature Duration Applied current Recovery	MF Series : 85±2°C : 1000 hrs : Rated current : At least 2 hrs of recovery under the st	(LBC3225 Series : Within±20%) No significant abnormality in appearance. — andard condition after the test, followed by the measurement within 48 hrs. Inductance change : Within±10%
Specified Value Test Methods and Remarks 22.Low temperature	LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature Duration Applied current Recovery e life test LB, LBC, LBR, LBM	MF Series : 85±2°C : 1000 hrs : Rated current : At least 2 hrs of recovery under the st	(LBC3225 Series : Within±20%) No significant abnormality in appearance. — andard condition after the test, followed by the measurement within 48 hrs.
Specified Value Test Methods and Remarks 22.Low temperature Specified Value	LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature Duration Applied current Recovery e life test LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature	MF Series : 85±2°C : 1000 hrs : Rated current : At least 2 hrs of recovery under the state of the series IF Series MF Series : −40±2°C	(LBC3225 Series : Within±20%) No significant abnormality in appearance. — andard condition after the test, followed by the measurement within 48 hrs. Inductance change : Within±10%
Specified Value Test Methods and Remarks 22.Low temperature	LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature Duration Applied current Recovery e life test LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature Duration	### Series #### Series #### Series #### Series	(LBC3225 Series : Within±20%) No significant abnormality in appearance.
Specified Value Test Methods and Remarks 22.Low temperature Specified Value Test Methods and	LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature Duration Applied current Recovery e life test LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature	### Series #### Series #### Series #### Series	(LBC3225 Series : Within±20%) No significant abnormality in appearance. — andard condition after the test, followed by the measurement within 48 hrs. Inductance change : Within±10%
Test Methods and Remarks 22.Low temperature Specified Value Test Methods and Remarks	LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature Duration Applied current Recovery elife test LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature Duration Recovery	### Series #### Series #### Series #### Series	(LBC3225 Series : Within±20%) No significant abnormality in appearance.
Specified Value Test Methods and Remarks 22.Low temperature Specified Value Test Methods and	LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature Duration Applied current Recovery e life test LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature Duration Recovery	### Series ### Se	(LBC3225 Series : Within±20%) No significant abnormality in appearance.
Test Methods and Remarks 22.Low temperature Specified Value Test Methods and Remarks	LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature Duration Applied current Recovery LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature Duration Recovery on LB, LBC, LBR, LBM	### Series ### Series ### Series ### Series ### Series ### Series ### IT Series ### Series ### IT Series ### Series ### IT Series ### IT Series #### IT Series	(LBC3225 Series : Within±20%) No significant abnormality in appearance. — andard condition after the test, followed by the measurement within 48 hrs. Inductance change : Within±10% No significant abnormality in appearance. andard condition after the test, followed by the measurement within 48 hrs.
Test Methods and Remarks 22.Low temperature Specified Value Test Methods and Remarks 23.Standard conditions	LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature Duration Applied current Recovery e life test LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature Duration Recovery	### Series ### Series ### Series ### Series ### Series ### Series ### IT Series ### Series ### IT Series ### Series ### IT Series ### IT Series #### IT Series	(LBC3225 Series: Within±20%) No significant abnormality in appearance. — andard condition after the test, followed by the measurement within 48 hrs. Inductance change: Within±10% No significant abnormality in appearance. andard condition after the test, followed by the measurement within 48 hrs. Standard condition after the test, followed by the measurement within 48 hrs. Standard test conditions Unless specified, Ambient temperature is 20±15°C and the Relative humidity is 65±20%. If there is any doubt about the test results, further
Test Methods and Remarks 22.Low temperature Specified Value Test Methods and Remarks	LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature Duration Applied current Recovery Elife test LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature Duration Recovery On LB, LBC, LBR, LBM CB, CBC, CBL, CBI CB, CBC, CBL, CBI	### Series ### Series ### Series ### Series ### Series ### Series ### IT Series ### Series ### IT Series ### Series ### IT Series ### IT Series #### IT Series	(LBC3225 Series: Within±20%) No significant abnormality in appearance. — andard condition after the test, followed by the measurement within 48 hrs. Inductance change: Within±10% No significant abnormality in appearance. andard condition after the test, followed by the measurement within 48 hrs. Standard condition after the test, followed by the measurement within 48 hrs. Standard test conditions Unless specified, Ambient temperature is 20±15°C and the Relative humidity is 65±20%. If there is any doubt about the test results, further measurement shall be had within the following limits:
Test Methods and Remarks 22.Low temperature Specified Value Test Methods and Remarks 23.Standard conditions	LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature Duration Applied current Recovery LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature Duration Recovery on LB, LBC, LBR, LBM	### Series ### Series ### Series ### Series ### Series ### Series ### IT Series ### Series ### IT Series ### Series ### IT Series ### IT Series #### IT Series	(LBC3225 Series: Within±20%) No significant abnormality in appearance. — andard condition after the test, followed by the measurement within 48 hrs. Inductance change: Within±10% No significant abnormality in appearance. andard condition after the test, followed by the measurement within 48 hrs. Standard condition after the test, followed by the measurement within 48 hrs. Standard test conditions Unless specified, Ambient temperature is 20±15°C and the Relative humidity is 65±20%. If there is any doubt about the test results, further
Test Methods and Remarks 22.Low temperature Specified Value Test Methods and Remarks 23.Standard conditions	LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature Duration Applied current Recovery Elife test LB, LBC, LBR, LBM CB, CBC, CBL, CBI LBM Series Temperature Duration Recovery On LB, LBC, LBR, LBM CB, CBC, CBL, CBI CB, CBC, CBL, CBI	### Series ### Series ### Series ### Series ### Series ### Series ### IT Series ### Series ### IT Series ### Series ### IT Series ### IT Series #### IT Series	(LBC3225 Series: Within±20%) No significant abnormality in appearance. — andard condition after the test, followed by the measurement within 48 hrs. Inductance change: Within±10% No significant abnormality in appearance. andard condition after the test, followed by the measurement within 48 hrs. Standard test conditions Unless specified, Ambient temperature is 20±15°C and the Relative humidity is 65±20%. If there is any doubt about the test results, further measurement shall be had within the following limits: Ambient Temperature: 20±2°C


[▶] This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (http://www.ty-top.com/).

WIRE-WOUND CHIP INDUCTORS (LB SERIES), WIRE-WOUND CHIP POWER INDUCTORS (CB SERIES), WIRE-WOUND CHIP INDUCTORS FOR SIGNAL LINES (LB SERIES M TYPE)

PRECAUTIONS 1. Circuit Design Operating environment 1. The products described in this specification are intended for use in general electronic equipment, (office supply equipment, telecommunications systems, measuring equipment, and household equipment). They are not intended for use in mission-critical Precautions equipment or systems requiring special quality and high reliability (traffic systems, safety equipment, aerospace systems, nuclear control systems and medical equipment including life-support systems,) where product failure might result in loss of life, injury or damage. For such uses, contact TAIYO YUDEN Sales Department in advance. 2. PCB Design ◆Land pattern design Precautions 1. Please contact any of our offices for a land pattern, and refer to a recommended land pattern of a right figure or specifications. **PRECAUTIONS** [Recommended Land Patterns] Technical Surface Mounting considerations Mounting and soldering conditions should be checked beforehand. · Applicable soldering process to those products is reflow soldering only.

3. Consideration	3. Considerations for automatic placement		
Precautions	 ◆Adjustment of mounting machine 1. Excessive impact load should not be imposed on the products when mounting onto the PC boards. 2. Mounting and soldering conditions should be checked beforehand. 		
Technical considerations	1. When installing products, care should be taken not to apply distortion stress as it may deform the products.		

4. Soldering A Reflow soldering (LB and CB Types) 1. For reflow soldering with either leaded or lead-free solder, the profile specified in "point for controlling" is recommended. A Recommended conditions for using a soldering iron 1. Put the soldering iron on the land-pattern. Soldering iron's temperature − Below 350°C Duration−3 seconds or less. The soldering iron should not come in contact with inductor directly. A Reflow soldering (LB and CB Types) 1. Reflow profile




Technical

considerations

◆Recommended conditions for using a soldering iron

1. Components can be damaged by excessive heat where soldering conditions exceed the specified range.



This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (http://www.ty-top.com/).

6. Handling	
Precautions	 ◆Handling 1. Keep the inductors away from all magnets and magnetic objects. ◆Breakaway PC boards (splitting along perforations) 1. When splitting the PC board after mounting inductors, care should be taken not to give any stresses of deflection or twisting to the board. 2. Board separation should not be done manually, but by using the appropriate devices. ◆Mechanical considerations 1. Please do not give the inductors any excessive mechanical shocks.
Technical considerations	 ◆Handling 1. There is a case that a characteristic varies with magnetic influence. ◆Breakaway PC boards(splitting along perforations) 1. Planning pattern configurations and the position of products should be carefully performed to minimize stress. ◆Mechanical considerations 1. There is a case to be damaged by a mechanical shock.

7. Storage cond	tions
Precautions	 ♦ Storage 1. To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled. • Recommended conditions Ambient temperature:0~40°C / Humidity:Below 70% RH The ambient temperature must be kept below 30°C even under ideal storage conditions, solderability of products electrodes may decrease as time passes. For this reason, LB type: Should be used within 6 months from the time of delivery.
Technical considerations	◆Storage 1. Under a high temperature and humidity environment, problems such as reduced solderability caused by oxidation of terminal electrodes and deterioration of taping/packaging materials may take place.