Electra House, 32 Southtown Road Great Yarmouth, Norfolk NR31 0DU, England Telephone +44 (0)1493 602602 Fax +44 (0)1493 665111 Email:sales@midasdisplays.com www.midasdisplays.com

MC11608A6W1-SPTLY 1 x 16		8mm Character Height	LCD Module								
	Specification										
Version: 5		Date: 29/10/2018									
	Revision										
1	30/10/2009	First issue.									
2	22/11/2013	Correct Contour Drawing Modify ST7066U IC	information Modify								
		Backlight Information.									
3	12/08/2014	Remove IC information.									
4	25/02/2016	Modify Precautions in use of LCD Modules &	Static electricity								
		test.									
5	29/10/2018	Modify Backlight Information.									

Display F			
Character Count	1 x 16		
Appearance	Black on Yellow/Green		
Logic Voltage	5V		
Interface	Parallel		1
Font Set	English / Japanese		ROHS ompliant
Display Mode	Transflective		ampliant
Character Height	8.06mm	C	omphant
LC Type	STN		
Module Size	122.00 x 33.00 x 13.50mm		
Operating Temperature	-20°C ~ +70°C		
Construction	СОВ	Box Quantity	Weight / Display
LED Backlight	Yellow		<u> </u>

\* - For full design functionality, please use this specification in conjunction with the ST7066U specification. (Provided Separately)

Display Accessories									
Part Number	Description								

Optional Variants									
Appearances	Voltage								

# **General Specification**

#### The Features is described as follow:

■ Module dimension: 122.0 x 33.0 x 13.5 (max.) mm

■ View area: 99.0 x 13.0 mm

■ Active area: 94.84 x 9.66 mm

■ Number of Characters: 16 characters x 1Lines

■ Dot size: 0.92 x 1.1 mm

■ Dot pitch: 0.98 x 1.16 mm

■ Character size: 4.84 x 8.06 mm

■ Character pitch: 6.0 x 8.56 mm

■ LCD type: STN Positive, Yellow Green Transflective

■ Duty: 1/16

■ View direction: 6 o'clock


■ Backlight Type: LED, Yellow Green

■ IC: ST7066U

# **Interface Pin Function**

Pin No.	Symbol	Level	Description
1	Vss	0V	Ground
2	$V_{DD}$	5.0V	Supply Voltage for logic
3	VO	(Variable)	Operating voltage for LCD
4	RS	H/L	H: DATA, L: Instruction code
5	R/W	H/L	H: Read (Module> MPU) L: Write(MPU> Module)
6	E	H,H→L	Chip enable signal
7	DB0	H/L	Data bit 0
8	DB1	H/L	Data bit 1
9	DB2	H/L	Data bit 2
10	DB3	H/L	Data bit 3
11	DB4	H/L	Data bit 4
12	DB5	H/L	Data bit 5
13	DB6	S H/L	Data bit 6
14	DB7	H/L	Data bit 7
15	Α	_	Power supply for B/L(+)
16	K	_	Power supply for B/L(-)

### **Contour Drawing & Block Diagram**

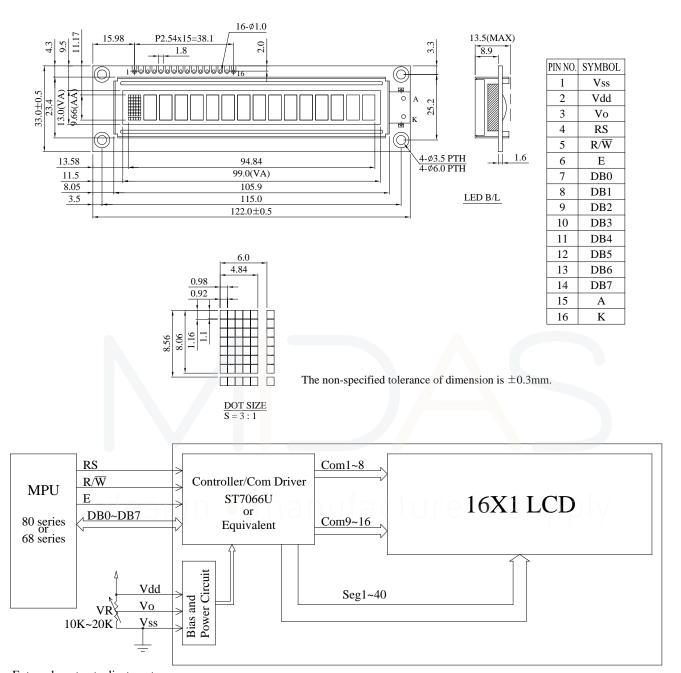

External contrast adjustment.

Character located 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 DDRAM address 00 01 02 03 04 05 06 07 40 41 42 43 44 45 46 47

2-line display mode.

# **Character Generator ROM Pattern**

Table.2


Upper 4 bit Lower 4 bit	LLLL	LLLH	LLHL	LLHH	LHLL	LHLH	LHHL	LННН	HLLL	HLLH	HLHL	нгнн	HHLL	ННГН	НННГ	нннн
LLLL	CG RAM (1)						*	<b>!</b>					-:::		# <u>`</u> :::	
LLLH	(2)		=					-:::			===				-:::1	
LLHL	(3)		11					i			===		• • •	.:-:		
LLHH	(4)				====	====	ŧ				!	====		====	====-	=:-:=
LHLL	(5)				!		::::	·!							<b>!!</b>	
LHLH	(6)							II			==	!				
LHHL	(7)			<u></u>				I.,.I								
LHHH	(8)		==					ii								
HLLL	(1)	d	<b>.</b> .						fa	ctı	-11-6					
HLLH	(2)					= = =					=====	-=			[	****
HLHL	(3)			==	!		:							i		
нгнн	(4)			==				-					=		I-I	-=
HHLL	(5)		==								-1-::	:: <b>:</b>		!" <u>.</u> !	=:[:-	
HHLH	(6)						<b>!</b> • • • •	=======================================						=		
нннг	(7)		==		ii	"	!·**i					====		====	!!	
нннн	(8)						====	-==			: : :	!	:		=====	


### **Optical Characteristics**

Item	Symbol	Condition	Min	Тур	Max	Unit
	θ	CR≧2	0	_	20	ψ= 180°
View Angle	θ	CR≧2	0	_	40	ψ= 0°
View Angle	θ	CR≧2	0	_	30	ψ= 90°
	θ	CR≧2	0	_	30	ψ= 270°
Contrast Ratio	CR	_	_	3	_	_
_	T rise	_	_	150	200	ms
Response Time	T fall	_	_	150	200	ms

#### **Definition of Operation Voltage (Vop)**

#### **Definition of Response Time (Tr, Tf)**

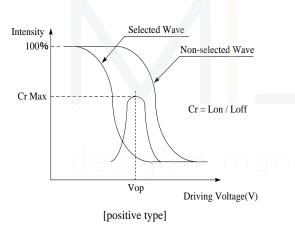

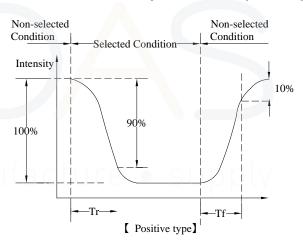


#### **Conditions:**

Operating Voltage : Vop Viewing Angle( $\theta$ ,  $\phi$ ) :  $0^{\circ}$ ,  $0^{\circ}$ 

Frame Frequency: 64 HZ Driving Waveform: 1/N duty, 1/a bias

#### **Definition of viewing angle(CR≧2)**

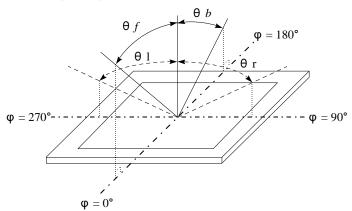


# **Absolute Maximum Ratings**

Item	Symbol	Min	Тур	Max	Unit
Operating Temperature	Тор	-20	_	+70	°C
Storage Temperature	T <sub>ST</sub>	-30	_	+80	°C
Input Voltage	Vı	Vss	_	$V_{DD}$	V
Supply Voltage For Logic	VDD-VSS	-0.3	_	7	V
Supply Voltage For LCD	V <sub>DD</sub> -V <sub>o</sub>	-0.3	_	13	V

### **Electrical Characteristics**

Item	Symbol	Condition	Min	Тур	Max	Unit
Supply Voltage For	V V		1.5	F 0	<i>5.5</i>	V
Logic	V <sub>DD</sub> -V <sub>SS</sub>	_	4.5	5.0	5.5	V
Supply Voltage For LCD		Ta=-20°C	_	_	5.5	V
*Note	$V_{DD}$ - $V_0$	Ta=25°C	4.2	4.35	4.5	V
		Ta=70°C	3.5	_	_	V
Input High Volt.	Vih	_	0.7 V <sub>DD</sub>	_	V <sub>DD</sub>	V
Input Low Volt.	VIL	_	Vss	_	0.6	V
Output High Volt.	V <sub>OH</sub>	_	3.9	_	V <sub>DD</sub>	V
Output Low Volt.	Vol	_	0	_	0.4	V
Supply Current	l <sub>DD</sub>	V <sub>DD</sub> =5.0V	1.0	1.2	1.5	mA

<sup>\*</sup> Note: Please design the VOP adjustment circuit on customer's main board




# **Backlight Information**

### **Specification**

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	TEST CONDITION
Supply Current	ILED	128	160	192	mA	V=4.2V
Supply Voltage	V	3.8	4.2	4.6	v	_
Reverse Voltage	VR	_	_	5	v	_
Luminance (Without LCD)	IV	150	210	_	CD/M <sup>2</sup>	ILED=160mA
Wave Length	λр	569	571	573	nm	ILED=160mA
Life Time	-	1	50000	-	Hr.	ILED≦160mA 25°C,50-60%RH
Color	Yellow Gro	een				

Note: The LED of B/L is drive by current only, drive voltage is for reference only. drive voltage can make driving current under safety area (current between minimum and maximum).

#### 2.Drive from pin15,pin16



ill never get Vee output from pin15)

# Reliability

#### Content of Reliability Test (Wide temperature, -20°C~70°C)

	Environmental Test								
Test Item	Content of Test	Test Condition	Note						
High Temperature storage	Endurance test applying the high storage temperature for a long time.	80°C 200hrs	2						
Low Temperature storage	Endurance test applying the low storage temperature for a long time.	-30°C 200hrs	1,2						
High Temperature Operation	Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.	70°C 200hrs							
Low Temperature Operation	Endurance test applying the electric stress under low temperature for a long time.	-20°C 200hrs	1						
High Temperature/ Humidity storage	The module should be allowed to stand at 60°C,90%RH max For 96hrs under no-load condition excluding the polarizer, Then taking it out and drying it at normal temperature.	60°C,90%RH 96hrs	1,2						
Thermal shock resistance	The sample should be allowed stand the following 10 cycles of operation -20°C 25°C 70°C  30min 5min 30min 1 cycle	-20°C/70°C 10 cycles							
Vibration test	Endurance test applying the vibration during transportation and using.	Total fixed amplitude: 1.5mm Vibration Frequency: 10~55Hz One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes	3						
Static electricity test	Endurance test applying the electric stress to the terminal.	VS=±600V(contact), ±800v(air), RS=330 Ω CS=150pF 10 times							

Note1: No dew condensation to be observed.

Note2: The function test shall be conducted after 4 hours storage at the normal Temperature and humidity after remove from the test chamber.

Note3: The packing have to including into the vibration testing.

# Inspection specification

NO	Item			Criterion		AQL			
01	Electrical Testing	<ul> <li>1.1 Missing vertical, horizontal segment, segment contrast defect.</li> <li>1.2 Missing character, dot or icon.</li> <li>1.3 Display malfunction.</li> <li>1.4 No function or no display.</li> <li>1.5 Current consumption exceeds product specifications.</li> <li>1.6 LCD viewing angle defect.</li> <li>1.7 Mixed product types.</li> <li>1.8 Contrast defect.</li> </ul>							
02	Black or white spots on LCD (display only)	three white o	<ul> <li>2.1 White and black spots on display ≤0.25mm, no more than three white or black spots present.</li> <li>2.2 Densely spaced: No more than two spots or lines within</li> <li>3mm</li> </ul>						
03	LCD black spots, white spots, contamination (non-display)	3.1 Round type $\Phi = (x + y) / $ 3.2 Line type : (a)	² ▼ Y	SIZE	Acceptable Q TY Accept no dense  2 1 0  Acceptable Q TY Accept no dense  2 As round type	2.5			
04	Polarizer bubbles	If bubbles are vi judge using blace specifications, no to find, must che specify direction	ck spot ot easy eck in	Size Φ $ Φ \le 0.20 $ $ 0.20 < Φ \le 0.50 $ $ 0.50 < Φ \le 1.00 $ $ 1.00 < Φ $ $ Total Q TY$	Acceptable Q TY Accept no dense 3 2 0 3	2.5			

NO	Item	Criterion			
05	Scratches	Follow NO.3 LCD black spots, white spots, contamination			
		Symbols Define: x: Chip length y: 0 k: Seal width t: 0 L: Electrode pad length 6.1 General glass chip 6.1.1 Chip on panel sur  z: Chip thickness Z≤1/2t  1/2t < z≤2t	spots, white spots, con Chip width z: Chip Glass thickness a: LCE	thickness D side length  panels:  x: Chip length  x≤1/8a  x≤1/8a	2.5
		z: Chip thickness	y: Chip width	x: Chip length	
		Z≦1/2t	Not over viewing area	x≦1/8a	
		1/2t <z≦2t< td=""><td>Not exceed 1/3k</td><td>x≦1/8a</td><td></td></z≦2t<>	Not exceed 1/3k	x≦1/8a	
		⊙ If there are 2 or more	chips, x is the total leng	of each chip.	

NO	Item		Criterion		AQL	
06	Glass	Symbols:  x: Chip length y: Chip width z: Chip thickness k: Seal width t: Glass thickness a: LCD side length L: Electrode pad length 6.2 Protrusion over terminal: 6.2.1 Chip on electrode pad:				
		$\begin{array}{ c c c c c c }\hline y: Chip \ width & x: Chip \ length & z: Chip \ thickness \\ \hline y \le 0.5mm & x \le 1/8a & 0 < z \le t \\ \hline 6.2.2 \ Non-conductive \ portion: \\ \hline \end{array}$				
		must remair specificatior ⊙If the produc mark not be	x≤1/8a d area touches the ITO terr and be inspected accordings. et will be heat sealed by the	ng to electrode terminal customer, the alignment		

NO	Item	Criterion	AQL
07	Cracked glass	The LCD with extensive crack is not acceptable.	2.5
08	Backlight elements	<ul> <li>8.1 Illumination source flickers when lit.</li> <li>8.2 Spots or scratched that appear when lit must be judged. Using LCD spot, lines and contamination standards.</li> <li>8.3 Backlight doesn't light or color wrong.</li> </ul>	0.65 2.5 0.65
09	Bezel	<ul><li>9.1 Bezel may not have rust, be deformed or have fingerprints, stains or other contamination.</li><li>9.2 Bezel must comply with job specifications.</li></ul>	2.5 0.65
10	PCB · COB	<ul> <li>10.1 COB seal may not have pinholes larger than 0.2mm or contamination.</li> <li>10.2 COB seal surface may not have pinholes through to the IC.</li> <li>10.3 The height of the COB should not exceed the height indicated in the assembly diagram.</li> <li>10.4 There may not be more than 2mm of sealant outside the seal area on the PCB. And there should be no more than three places.</li> <li>10.5 No oxidation or contamination PCB terminals.</li> <li>10.6 Parts on PCB must be the same as on the production characteristic chart. There should be no wrong parts, missing parts or excess parts.</li> <li>10.7 The jumper on the PCB should conform to the product characteristic chart.</li> </ul>	2.5 2.5 0.65 2.5 2.5 0.65
		<ul> <li>10.8 If solder gets on bezel tab pads, LED pad, zebra pad or screw hold pad, make sure it is smoothed down.</li> <li>10.9 The Scraping testing standard for Copper Coating of PCB</li> <li>X</li> <li>X * Y&lt;=2mm2</li> </ul>	2.5
11	Soldering	<ul> <li>11.1 No un-melted solder paste may be present on the PCB.</li> <li>11.2 No cold solder joints, missing solder connections, oxidation or icicle.</li> <li>11.3 No residue or solder balls on PCB.</li> <li>11.4 No short circuits in components on PCB.</li> </ul>	2.5 2.5 2.5 0.65

NO	Item	Criterion	AQL
		<ul><li>12.1 No oxidation, contamination, curves or, bends on interface Pin (OLB) of TCP.</li><li>12.2 No cracks on interface pin (OLB) of TCP.</li></ul>	
	General appearance	12.3 No contamination, solder residue or solder balls on product.	2.5
		12.4 The IC on the TCP may not be damaged, circuits.	2.5
		12.5 The uppermost edge of the protective strip on the interface pin must be present or look as if it cause the interface pin to	2.5
		sever.	
12		12.6 The residual rosin or tin oil of soldering (component or chip	
		component) is not burned into brown or black color.	
		12.7 Sealant on top of the ITO circuit has not hardened.	0.65
		12.8 Pin type must match type in specification sheet.	0.65
		12.9 LCD pin loose or missing pins.	0.65
		12.10 Product packaging must the same as specified on packaging specification sheet.	0.65
		12.11 Product dimension and structure must conform to product	
		specification sheet.	
		12.12 Visual defect outside of VA is not considered to be	
		rejection.	

design • manufacture • supply

#### **Precautions in use of LCD Modules**

- (1) Avoid applying excessive shocks to the module or making any alterations or modifications to it.
- (2) Don't make extra holes on the printed circuit board, modify its shape or change the components of LCD module.
- (3) Don't disassemble the LCM.
- (4) Don't operate it above the absolute maximum rating.
- (5) Don't drop, bend or twist LCM.
- (6) Soldering: only to the I/O terminals.
- (7) Storage: please storage in anti-static electricity container and clean environment.
- (8) MIDAS have the right to change the passive components, including R3,R6 & backlight adjust resistors. (Resistors, capacitors and other passive components will have different appearance and color caused by the different supplier.)
- (9) MIDAS have the right to change the PCB Rev. (In order to satisfy the supplying stability, management optimization and the best product performance...etc, under the premise of not affecting the electrical characteristics and external dimensions, MIDAS have the right to modify the version.)
- (10) To ensure the stability of the display screen, please apply screen saver after showing 30 mins of fixed display content.

design • manufacture • supply

#### **Material List of Components for RoHs**

1. MIDAS hereby declares that all of or part of products (with the mark "#"in code), including, but not limited to, the LCM, accessories or packages, manufactured and/or delivered to your company (including your subsidiaries and affiliated company) directly or indirectly by our company (including our subsidiaries or affiliated companies) do not intentionally contain any of the substances listed in all applicable EU directives and regulations, including the following substances.

Exhibit A: The Harmful Material List

Material	(Cd)	(Pb)	(Hg)	(Cr6+)	PBBs	PBDEs
Limited Value	100 ppm	1000 ppm	1000 ppm	1000 ppm	1000 ppm	1000 ppm
Above limited value is set up according to RoHS.						

- 2.Process for RoHS requirement : (only for RoHS inspection)
  - (1) Use the Sn/Ag/Cu soldering surface; the surface of Pb-free solder is rougher than we used before.
  - (2) Heat-resistance temp. :

Reflow: 250°C,30 seconds Max.;

Connector soldering wave or hand soldering: 320°C, 10 seconds max.

(3) Temp. curve of reflow, max. Temp. : 235±5°C;

Recommended customer's soldering temp. of connector: 280°C, 3 seconds.

#### Recommendable Storage

- 1. Place the panel or module in the temperature 25°C±5°C and the humidity below 65% RH
- 2. Do not place the module near organics solvents or corrosive gases.
- 3. Do not crush, shake, or jolt the module.