

RoHS
Compliant



Description

General purpose cartridge fuse-links of current ratings not exceeding 13A for domestic and similar purpose (primarily for use in plugs complying with the requirements of BS1363) on declared supply voltages not exceeding 240V at a nominal frequency of 50Hz or 60Hz.

Standard

Comply with BS1362:1973 standard including amendment 1 and 2.

Construction

Electroplated end caps substantially co-axial with a ceramic barrel. Sand filling is required inside of the body. Halogen free.


Specifications

Fuse Current	: 13A
Rated Voltage	: 240V AC
Frequency	: 45Hz to 62Hz
Breaking Capacity Rating	: 6,000A / 240V
Power Loss Rating	: The rated power loss shall not exceed one watt when carrying rated current.
Dimensions	: $\varnothing 6.3\text{mm} \times 25.4\text{mm}$
Colour	: Brown

Electrical Characteristic

Current	1.6In		1.9In	
	Min.	Max.	Min.	Max.
Operating time	30mins	-	-	30mins

Diagram

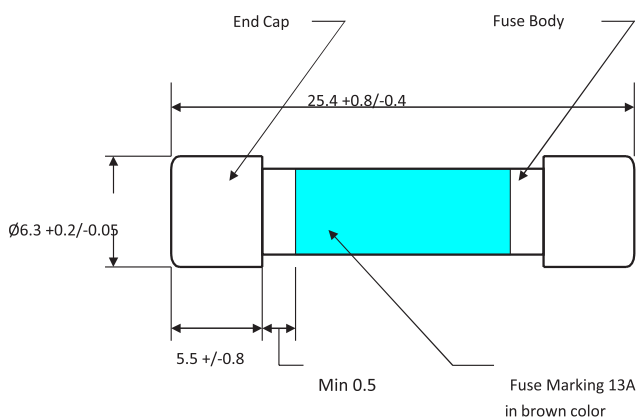

Dimensions : Millimetres

Material List

No	Part Name	Material	Quantity
1	End Caps	Copper alloy with nickel plating	2
2	Washers	Brass	2
3	Fuse Body	Ceramic	1
4	Fuse Wire	Copper alloy wire	1
5	Filling	Quartz sand	1

Part Number Table

Description	Part Number
Domestic Fuse, Fast Acting, 13A, 240V, Brown	13AFUSE1000

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-ELEC is the registered trademark of Premier Farnell Limited 2019.