


CODE: **ARAD2** v.1.1/II  
 NAME: **RACK 2U/400mm universal enclosure for RACK 19" cabinets**

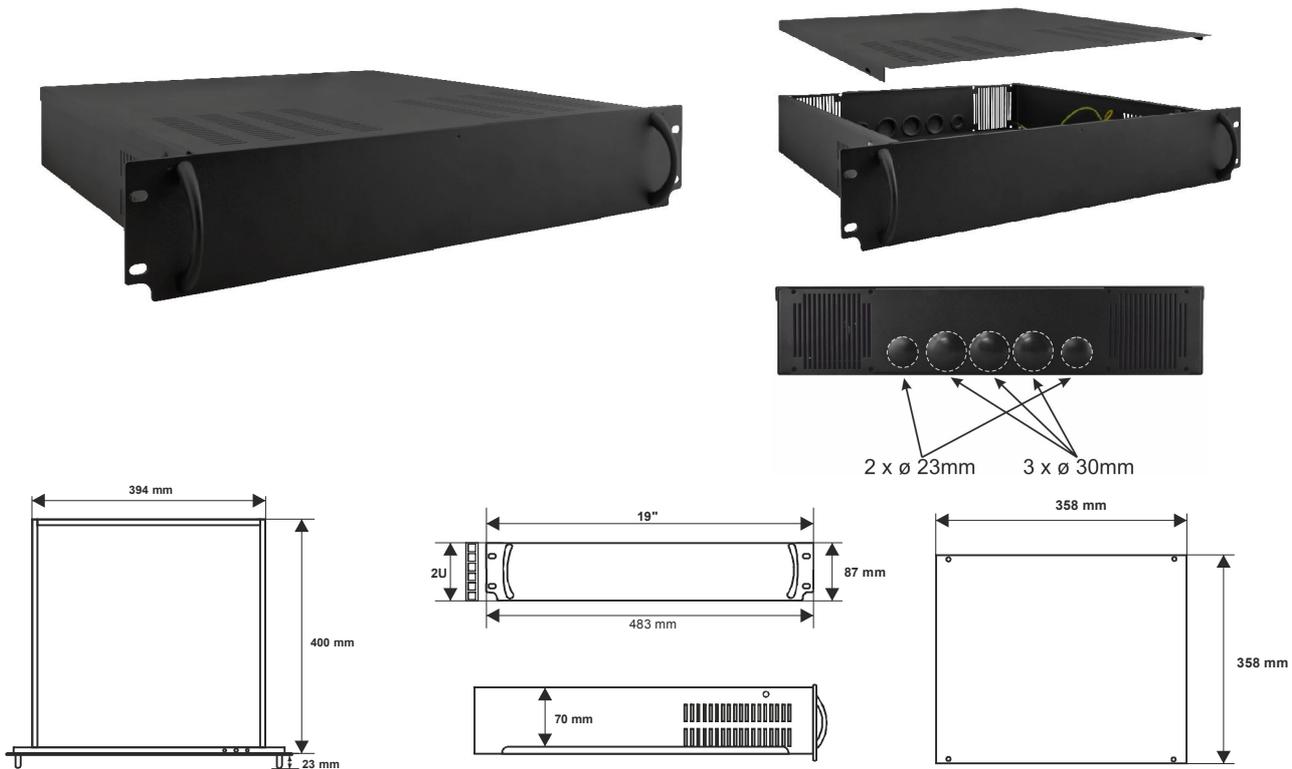

## INTENDED USE

Due to its design, the ARAD2 enclosure is intended for mounting inside RACK 19" cabinets. This general-purpose enclosure may serve as an auxiliary element for integrating CCTV, AC, I&HAS, RTV, LAN systems in RACK 19" cabinets. It is intended for mounting alarm control panels, AC controllers, power supply units, batteries, etc.

## SPECIFICATIONS

<b>Mounting dimensions:</b>	W=19", H=2U
<b>Internal dimensions:</b>	W=390, H=70, D=395 [mm, +/-2]
<b>Fitting battery:</b>	7Ah/12V
<b>Net/gross weight:</b>	5,20 / 5,95 [kg]
<b>Materials:</b>	sheet metal DC01, 1,0mm thick + front panel thickness: 1,5mm, RAL9005 BLACK
<b>Tampering protection:</b>	against unwanted opening of the enclosure
<b>Static load:</b>	- with the ARAS... rails - 30kg - without the ARAS... rails - 5kg
<b>Static load:</b>	inside, IP20
<b>Notes:</b>	- four-point fixing to the front RACK rails - 4 M6 screws with cage nuts included - the enclosure contains a mounting plate - for mounting with the ARAS... rails - fully extendable enclosure
<b>Declarations, warranty:</b>	CE, 2 year from the production date

### Mounting without the ARAS... rails to 5kg



### Mounting with the ARAS... rails to 30kg

