




3-conductor, double-deck terminal block; Through/through terminal block; L/L; gray housing

Item No.: 870-531



3-conductor, double-deck terminal block; Through/through terminal block; L/L; gray housing

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	870-531
GTIN / EAN	4045454094461
Content	1
Order amount	50
Customer item number	

Notes



Technical data


Miscellaneous

Safety information 1	Max. insulation diameter: 4.4mm
Packaging type	BOX
Ratings per	IEC/EN 60947-7-1
Rated voltage (III / 3) [V]	500 [V]
Rated impulse voltage (III / 3) [kV]	6 [kV]
Rated current [A]	24 [A]

Technical data	
Legend (ratings)	(III / 3) Overvoltage category III / Pollution degree 3
Type of wiring	Front-entry wiring
Total number of connection points	6
Total number of potentials	2
Number of levels	2
Connection technology	CAGE CLAMP®
Number of connection points (connection type)	6
Actuation type	Operating tool
Connectable conductor materials	Copper
Solid conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 4 mm² / 28 ... 12 AWG
Strip length	6 ... 7 mm / 0.24 ... 0.28 Inch
Width	5 mm / 0.197 Inch
Height from upper-edge of DIN-35 rail	40 mm / 1.575 Inch
Depth	91 mm / 3.583 Inch
Design	horizontal
Type of mounting	Carrier rail 35 x 15
Potential marking	L/L
Marking level	Side marking
Color	gray
Insulating material	Polyamide 66 (PA 66)
Fire load [MJ]	0.199 [MJ]
Weight [g]	13.55 [g]

Images & drawings

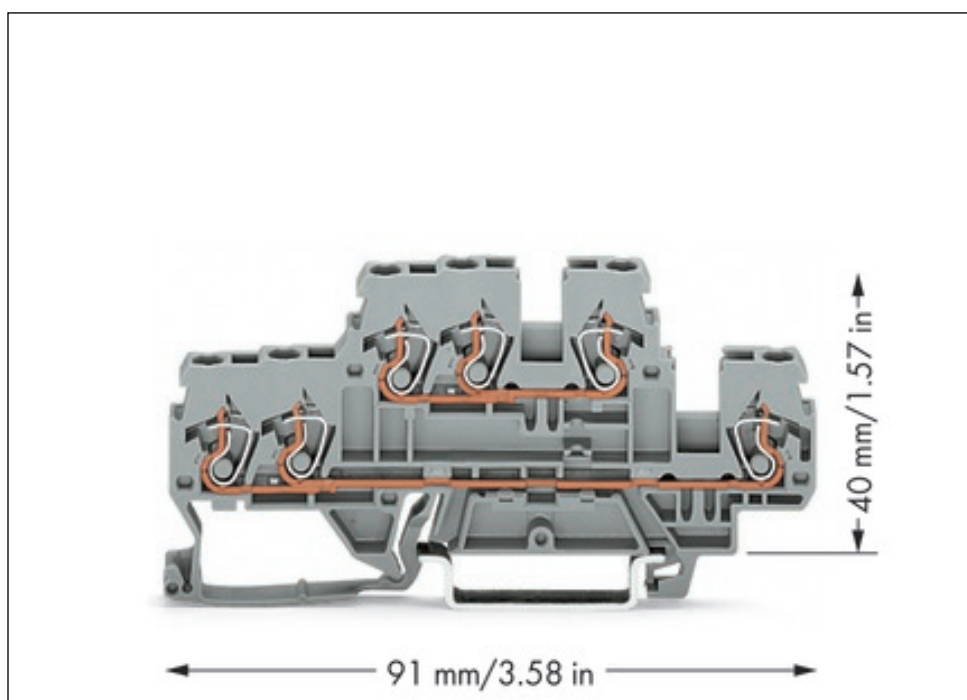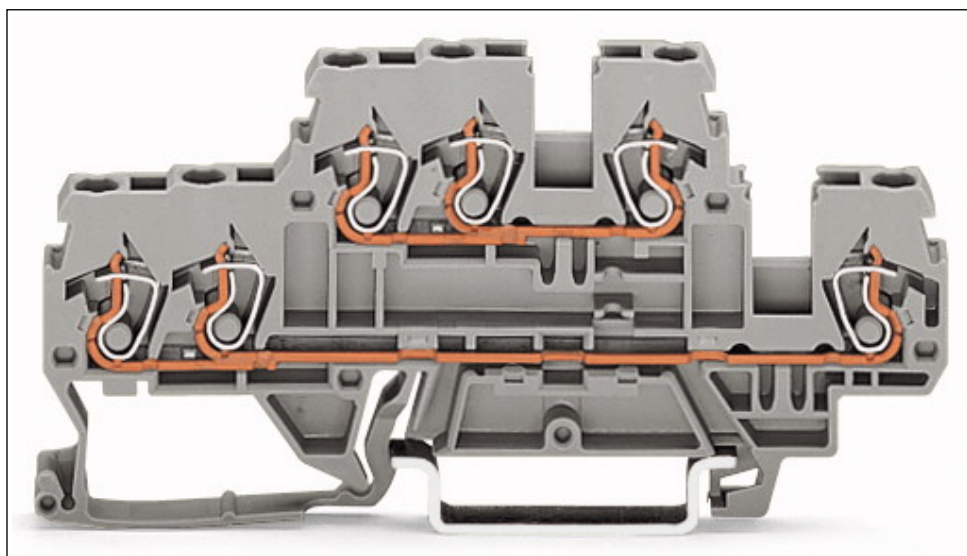

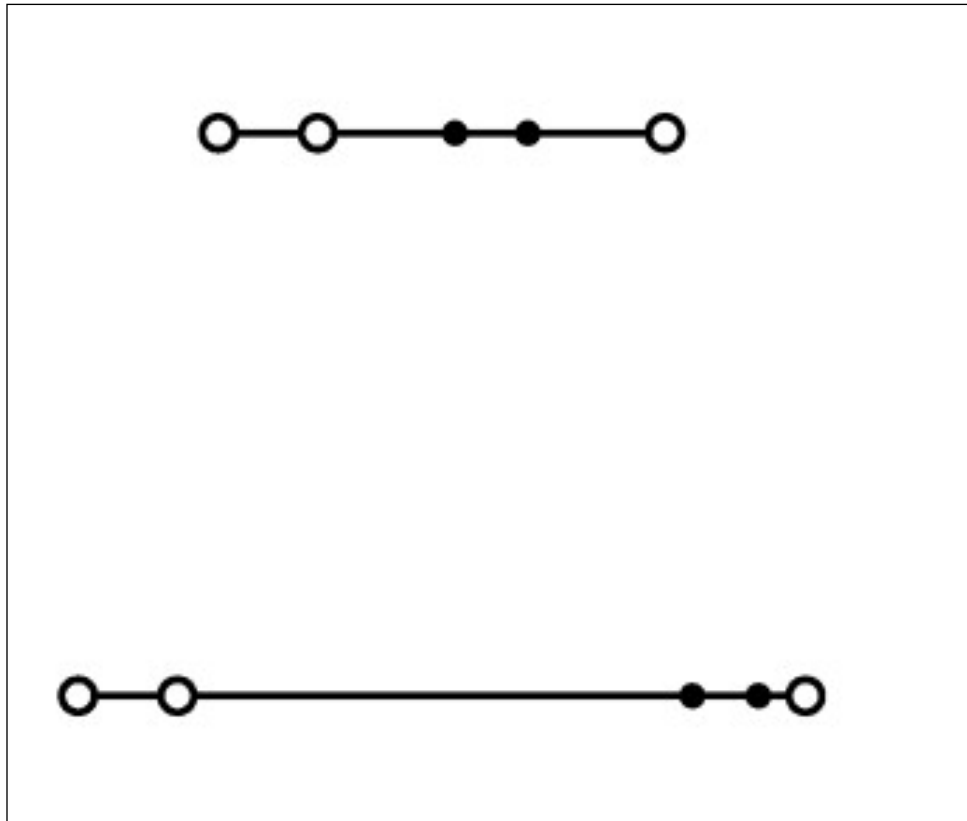

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.