

4G LTE Cellular Band Blade Antenna



AEACCA115021-S698



115.6 x 21.7 x 5.8 mm
RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE

FEATURES

- LTE700, GSM850, GSM900, DCS, PCS, UMTS1, LTE2600
- Gain of 2dBi
- VSWR $\leq$ 2.0
- Low profile 5.8mm
- Fakra connector
- Adhesive mount

APPLICATIONS


- IoT applications
- M2M
- 4G/LTE applications
- GSM
- DCS
- PCS
- UMTS
- Remote technology/ monitoring
- POS terminals

EXTERNAL ANTENNA

Parameters	Min.	Typ.	Max.	Units	Note
Frequency Range		698~960/1710~2655		MHz	
VSWR			2.0		
Polarization Model	Linear				
Impedance		50		Ω	
Gain		2		dBi	(Zenith)
Operating Temperature	-40		+85	$^{\circ}\text{C}$	
Input Power			10	W	

RETURN - LOSS CHARACTERSTICS

S11 Return-Loss

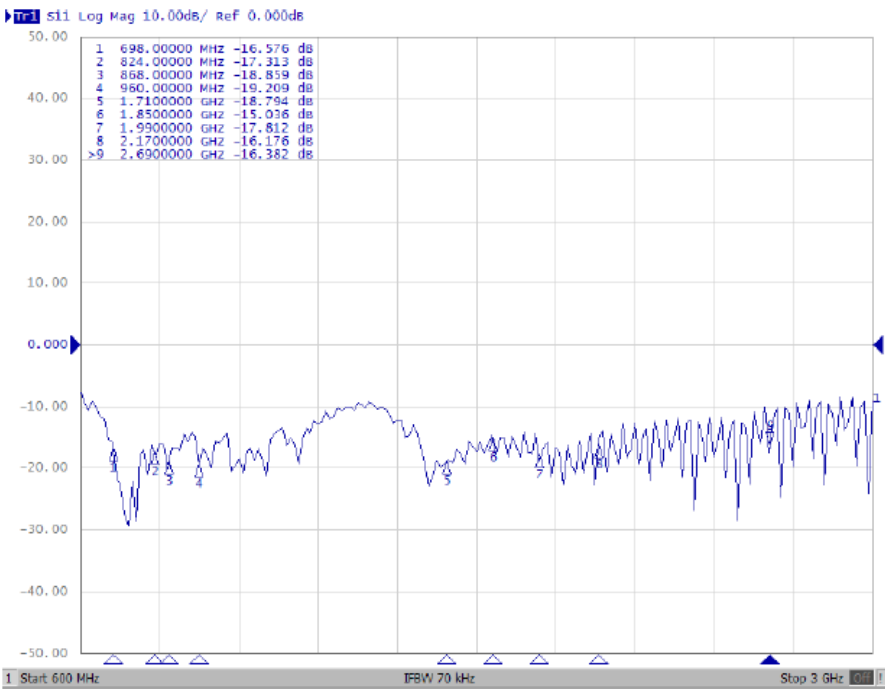

5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 03.19.2018

ABRACON IS
ISO9001-2008
CERTIFIED

4G LTE Cellular Band Blade Antenna

AEACCA115021-S698




115.6 x 21.7 x 5.8 mm
RoHS/RoHS II Compliant


MSL = N/A: NOT APPLICABLE

RADIATION PATTERNS


XY Plane

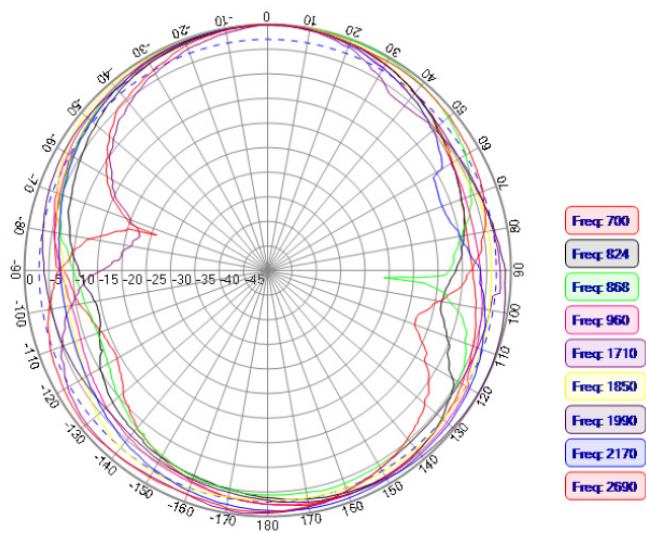


XZ Plane

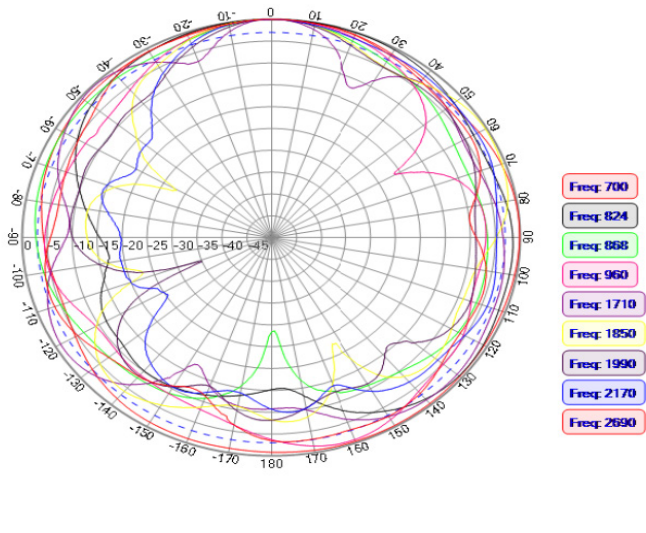


YZ Plane

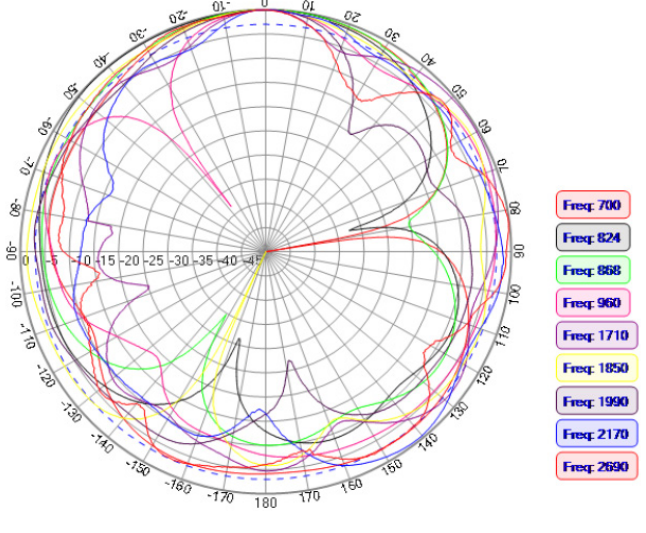


700 MHz

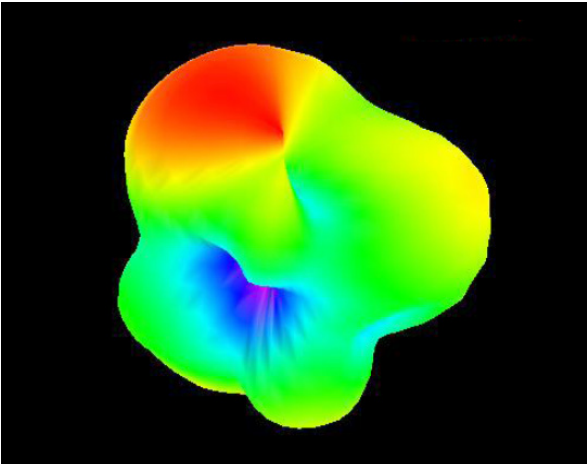

824 MHz

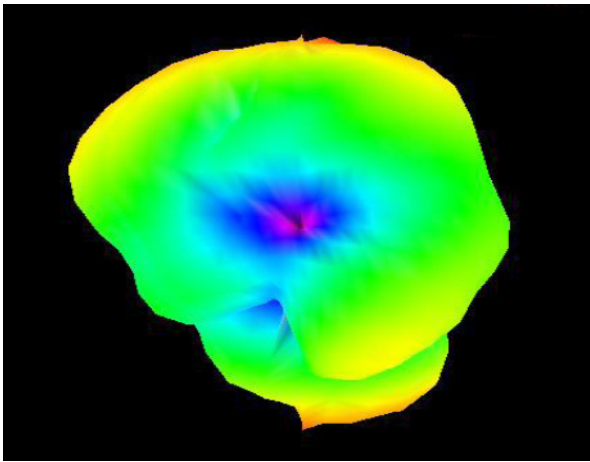

868 MHz

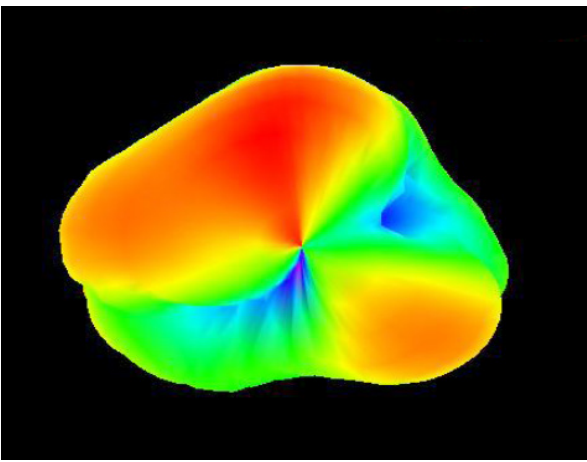

4G LTE Cellular Band Blade Antenna




AEACCA115021-S698


Pb | 115.6 x 21.7 x 5.8 mm
RoHS/RoHS II Compliant
MSL = N/A: NOT APPLICABLE

3D PATTERNS


960 MHz

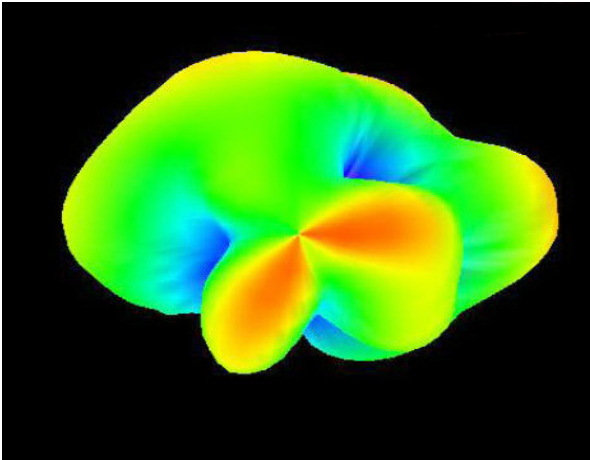


1710 MHz

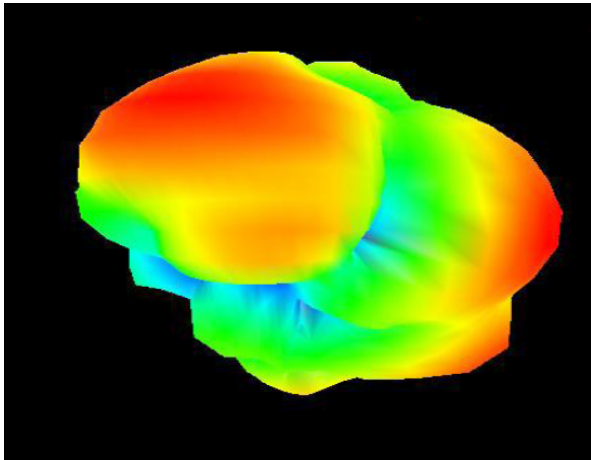


1850 MHz

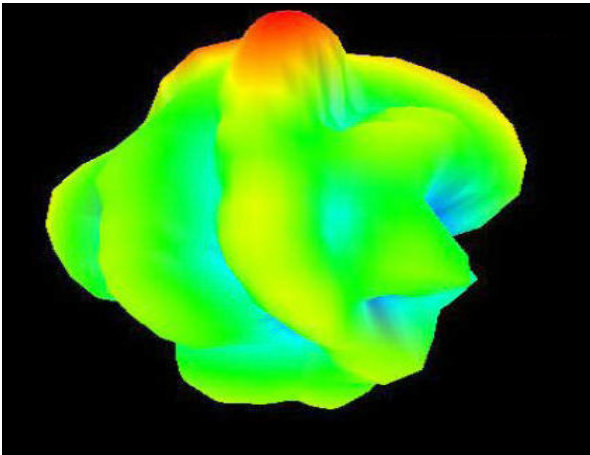


1990 MHz

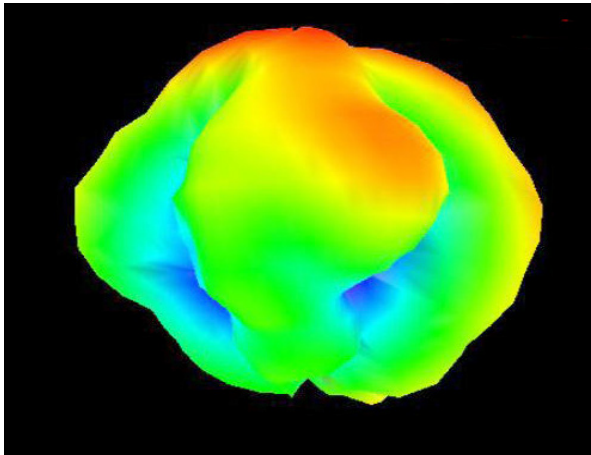

2170 MHz

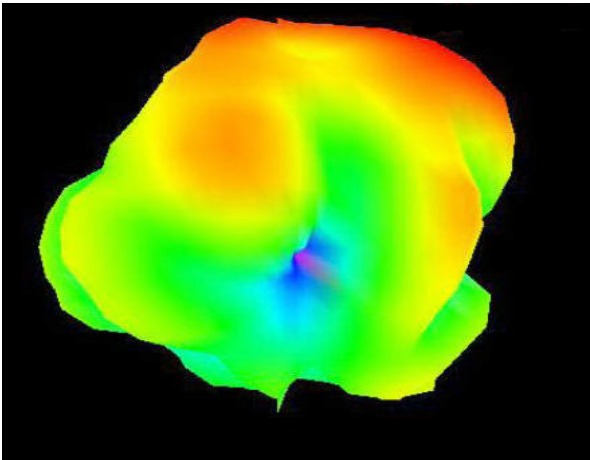

2690 MHz

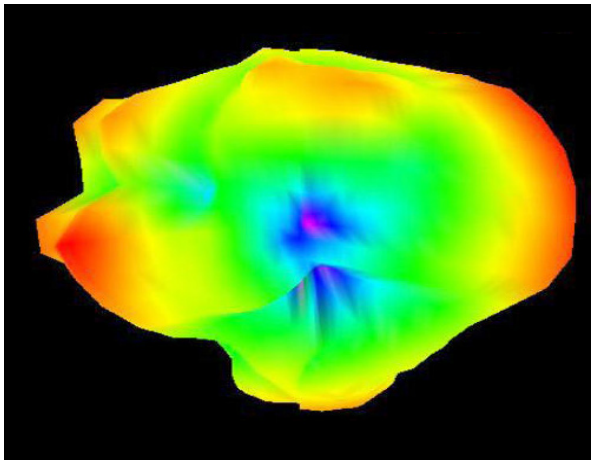

Frequency (MHz)	700	824	868	960	1710	1850	1990	2170	2690
Peak Gain (dBi)	2.12	0.83	2.60	1.00	1.61	0.78	0.34	-0.89	-3.00
Efficiency (%)	59	53	56	71	57	58	57	56	55


4G LTE Cellular Band Blade Antenna



AEACCA115021-S698

Pb | 115.6 x 21.7 x 5.8 mm
RoHS/RoHS II Compliant
MSL = N/A: NOT APPLICABLE



DIMENSIONS

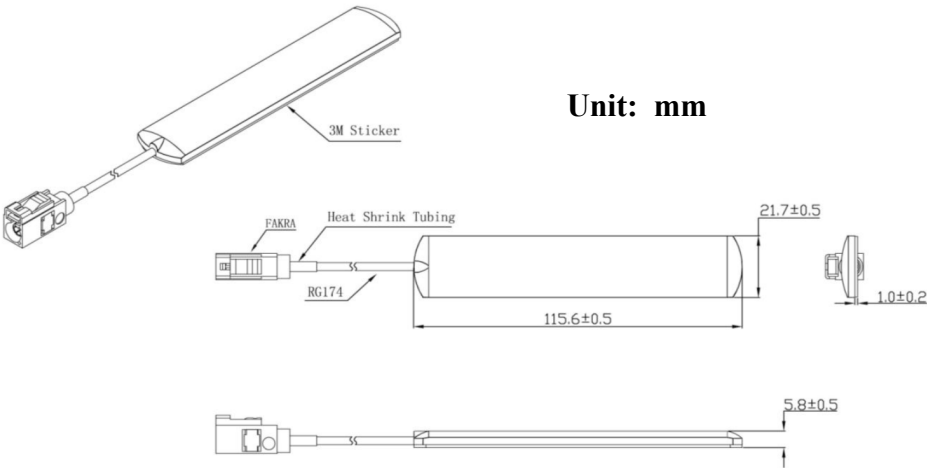

Parameters	Description
Cable Length	3.00 m
RF Cable	RG174
RF Connector	FAKRA/SMA or other
Radome Material	ABS
Mounting Type	Adhesive

PACKAGING

Each 700 x 320 x 155 mm size carton includes 250 pcs antenna, 13kgs/carton.

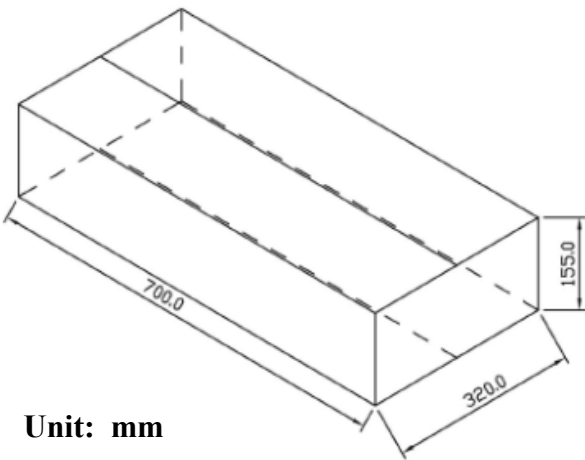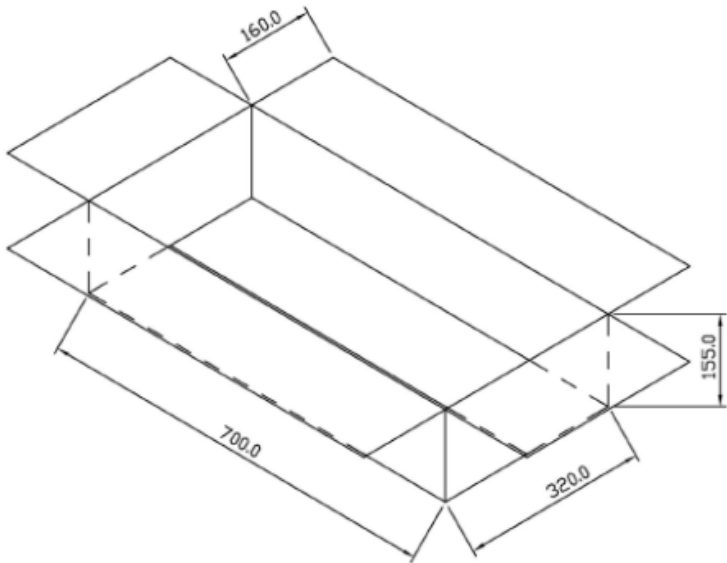

Unit: mm