



## 200W Single Output with PFC Function

# HRP-200 series



### ■ Features :

- Universal AC input / Full range
- Built-in active PFC function, PF>0.95
- High efficiency up to 89%
- Withstand 300VAC surge input for 5 seconds
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- Built-in constant current limiting circuit
- 1U low profile 38mm
- Built-in remote sense function
- 5 years warranty



UL62368-1 EN62368-1 TPTC004 IEC62368-1

### SPECIFICATION

| MODEL                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | HRP-200-3.3                                                                                                                           | HRP-200-5  | HRP-200-7.5 | HRP-200-12   | HRP-200-15   | HRP-200-24   | HRP-200-36   | HRP-200-48   |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|------------|-------------|--------------|--------------|--------------|--------------|--------------|
| OUTPUT                   | DC VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 3.3V                                                                                                                                  | 5V         | 7.5V        | 12V          | 15V          | 24V          | 36V          | 48V          |
|                          | RATED CURRENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 40A                                                                                                                                   | 35A        | 26.7A       | 16.7A        | 13.4A        | 8.4A         | 5.7A         | 4.3A         |
|                          | CURRENT RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 0 ~ 40A                                                                                                                               | 0 ~ 35A    | 0 ~ 26.7A   | 0 ~ 16.7A    | 0 ~ 13.4A    | 0 ~ 8.4A     | 0 ~ 5.7A     | 0 ~ 4.3A     |
|                          | RATED POWER                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 132W                                                                                                                                  | 175W       | 200.3W      | 200.4W       | 201W         | 201.6W       | 205.2W       | 206.4W       |
|                          | RIPPLE & NOISE (max.) <small>Note.2</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 80mVp-p                                                                                                                               | 90mVp-p    | 100mVp-p    | 120mVp-p     | 150mVp-p     | 150mVp-p     | 250mVp-p     | 250mVp-p     |
|                          | VOLTAGE ADJ. RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 2.8 ~ 3.8V                                                                                                                            | 4.3 ~ 5.8V | 6.8 ~ 9V    | 10.2 ~ 13.8V | 13.5 ~ 18V   | 21.6 ~ 28.8V | 28.8 ~ 39.6V | 40.8 ~ 55.2V |
|                          | VOLTAGE TOLERANCE <small>Note.3</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | ±2.0%                                                                                                                                 | ±2.0%      | ±2.0%       | ±1.0%        | ±1.0%        | ±1.0%        | ±1.0%        | ±1.0%        |
|                          | LINE REGULATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | ±0.5%                                                                                                                                 | ±0.5%      | ±0.5%       | ±0.3%        | ±0.3%        | ±0.2%        | ±0.2%        | ±0.2%        |
|                          | LOAD REGULATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | ±1.5%                                                                                                                                 | ±1.0%      | ±1.0%       | ±0.5%        | ±0.5%        | ±0.5%        | ±0.5%        | ±0.5%        |
|                          | SETUP, RISE TIME                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1000ms, 50ms/230VAC      2500ms, 50ms/115VAC at full load                                                                             |            |             |              |              |              |              |              |
| HOLD UP TIME (Typ.)      | 16ms/230VAC      16ms/115VAC at full load                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                       |            |             |              |              |              |              |              |
| INPUT                    | VOLTAGE RANGE <small>Note.5</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 85 ~ 264VAC      120 ~ 370VDC                                                                                                         |            |             |              |              |              |              |              |
|                          | FREQUENCY RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 47 ~ 63Hz                                                                                                                             |            |             |              |              |              |              |              |
|                          | POWER FACTOR (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | PF>0.95/230VAC      PF>0.99/115VAC at full load                                                                                       |            |             |              |              |              |              |              |
|                          | EFFICIENCY (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 80%                                                                                                                                   | 84%        | 86%         | 88%          | 88%          | 88%          | 89%          | 89%          |
|                          | AC CURRENT (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 2.1A/115VAC      1.1A/230VAC                                                                                                          |            |             |              |              |              |              |              |
|                          | INRUSH CURRENT (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 35A/115VAC      70A/230VAC                                                                                                            |            |             |              |              |              |              |              |
|                          | LEAKAGE CURRENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <1.2mA / 240VAC                                                                                                                       |            |             |              |              |              |              |              |
| PROTECTION               | OVERLOAD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 105 ~ 135% rated output power<br>Protection type : Constant current limiting, recovers automatically after fault condition is removed |            |             |              |              |              |              |              |
|                          | OVER VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 3.96 ~ 4.62V                                                                                                                          | 6 ~ 7V     | 9.4 ~ 10.9V | 14.4 ~ 16.8V | 18.8 ~ 21.8V | 30 ~ 34.8V   | 41.4 ~ 48.6V | 57.6 ~ 67.2V |
|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Protection type : Shut down o/p voltage, re-power on to recover                                                                       |            |             |              |              |              |              |              |
|                          | OVER TEMPERATURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Shut down o/p voltage, recovers automatically after temperature goes down                                                             |            |             |              |              |              |              |              |
| ENVIRONMENT              | WORKING TEMP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | -40 ~ +70℃ (Refer to "Derating Curve")                                                                                                |            |             |              |              |              |              |              |
|                          | WORKING HUMIDITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 20 ~ 90% RH non-condensing                                                                                                            |            |             |              |              |              |              |              |
|                          | STORAGE TEMP., HUMIDITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | -40 ~ +85℃, 10 ~ 95% RH                                                                                                               |            |             |              |              |              |              |              |
|                          | TEMP. COEFFICIENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | ±0.03%/℃ (0 ~ 50℃)                                                                                                                    |            |             |              |              |              |              |              |
|                          | VIBRATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes                                                                          |            |             |              |              |              |              |              |
| SAFETY & EMC<br>(Note 4) | SAFETY STANDARDS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | UL62368-1, TUV EN62368-1, AS/NZS62368.1, EAC TP TC 004 approved                                                                       |            |             |              |              |              |              |              |
|                          | WITHSTAND VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | I/P-O/P:3KVAC    I/P-FG:2KVAC    O/P-FG:0.5KVAC                                                                                       |            |             |              |              |              |              |              |
|                          | ISOLATION RESISTANCE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25℃ / 70% RH                                                                             |            |             |              |              |              |              |              |
|                          | EMC EMISSION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Compliance to EN55032 (CISPR32) Class B, EN61000-3-2,-3, EAC TP TC 020                                                                |            |             |              |              |              |              |              |
|                          | EMC IMMUNITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024, heavy industry level, criteria A, EAC TP TC 020                                      |            |             |              |              |              |              |              |
| OTHERS                   | MTBF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 209.4K hrs min.      MIL-HDBK-217F (25℃)                                                                                              |            |             |              |              |              |              |              |
|                          | DIMENSION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 199*98*38mm (L*W*H)                                                                                                                   |            |             |              |              |              |              |              |
|                          | PACKING                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 0.77Kg; 18pcs/14.9Kg/0.87CUFT                                                                                                         |            |             |              |              |              |              |              |
| NOTE                     | 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature.<br>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.<br>3. Tolerance : includes set up tolerance, line regulation and load regulation.<br>4. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on <a href="http://www.meanwell.com">http://www.meanwell.com</a> )<br>5. Derating may be needed under low input voltages. Please check the derating curve for more details.<br>6. The ambient temperature derating of 3.5℃/1000m with fanless models and of 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft).<br>※ Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a> |                                                                                                                                       |            |             |              |              |              |              |              |

## Mechanical Specification


Case No.902E Unit:mm

Terminal Pin No. Assignment

| Pin No. | Assignment | Pin No. | Assignment   |
|---------|------------|---------|--------------|
| 1       | AC/L       | 4,5     | DC OUTPUT -V |
| 2       | AC/N       | 6,7     | DC OUTPUT +V |
| 3       | FG $\perp$ |         |              |


Connector Pin No. Assignment (CN100) :  
HRS DF11-6DP-2DS or equivalent

| Pin No. | Assignment | Mating Housing                | Terminal                        |
|---------|------------|-------------------------------|---------------------------------|
| 1       | NC         | HRS DF11-6DS<br>or equivalent | HRS DF11-**-SC<br>or equivalent |
| 2       | NC         |                               |                                 |
| 3       | NC         |                               |                                 |
| 4       | NC         |                               |                                 |
| 5       | +S         |                               |                                 |
| 6       | -S         |                               |                                 |

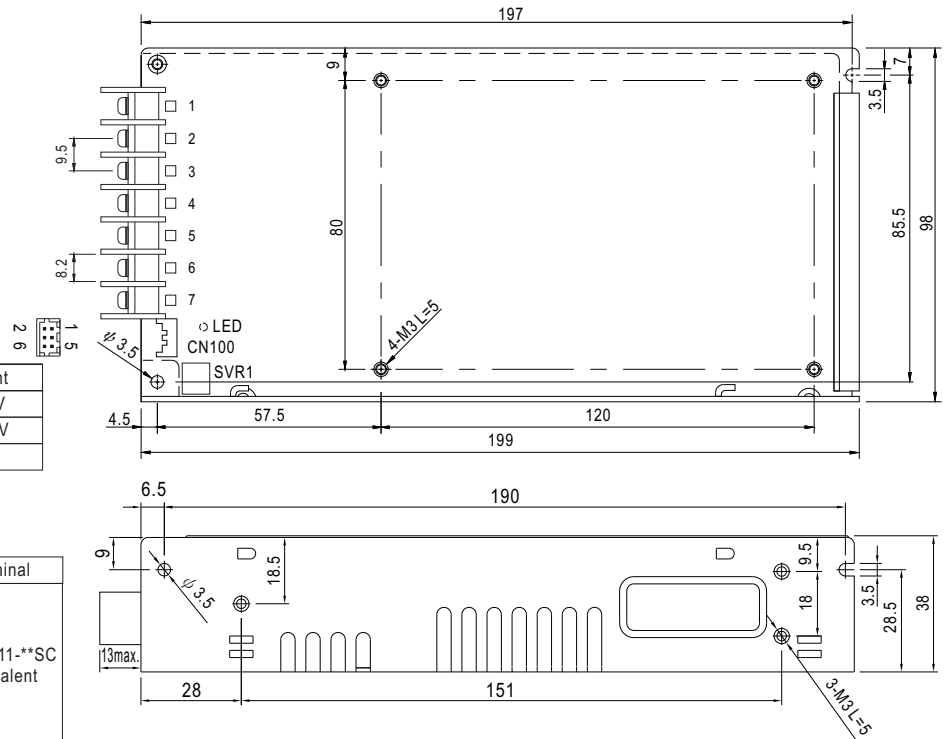

## Block Diagram

PWM fosc:70KHz

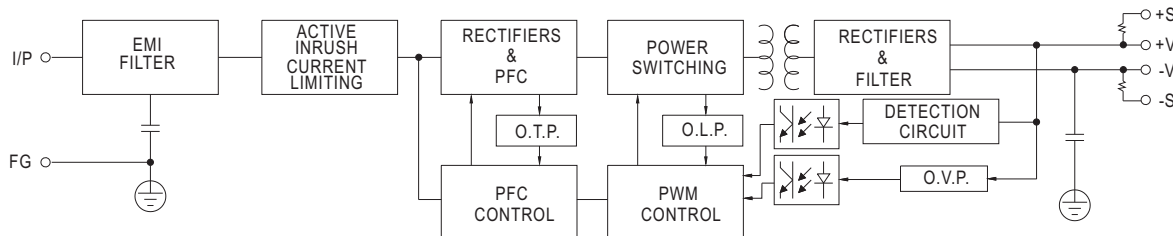

## Derating Curve

## Output Derating VS Input Voltage

