




## Data sheet | Item number: 2002-2401

TOPJOB®S double-deck terminal block; through/through (L/L); rail mount; 4-conductor; 5.2 mm wide; gray

[www.wago.com/2002-2401](http://www.wago.com/2002-2401)

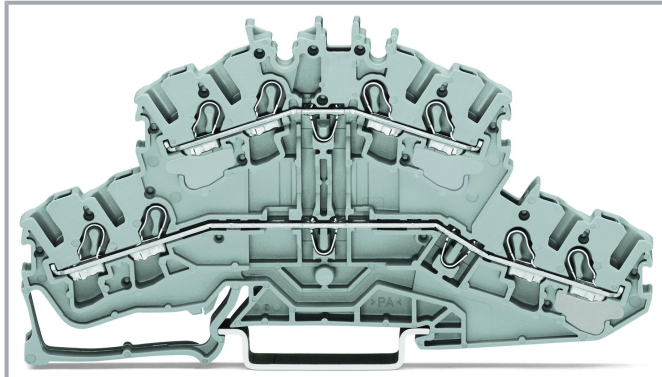

Color: 

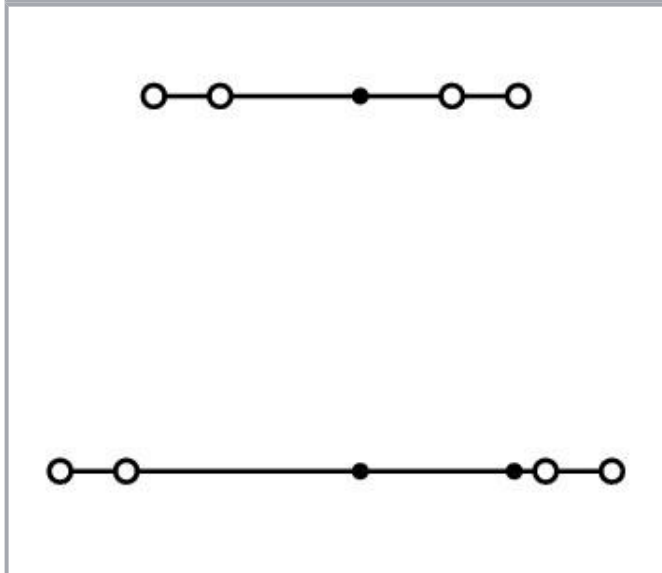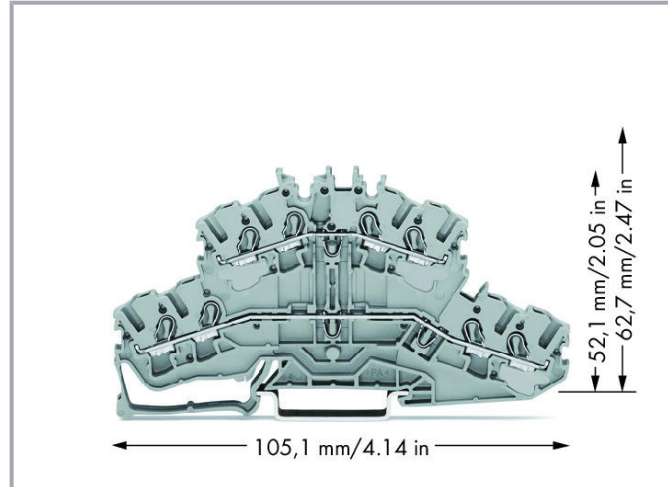

### Data

#### Electrical data

### IEC Approvals

Ratings per

IEC/EN 60947-7-1

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



|                             |                                                                      |
|-----------------------------|----------------------------------------------------------------------|
| Rated voltage (III / 3)     | 800 V                                                                |
| Rated surge voltage (III/3) | 8 kV                                                                 |
| Rated current               | 24 A                                                                 |
| Rated current 2             | 28 A                                                                 |
| Legend (ratings)            | (III / 3) $\triangleq$ Overvoltage category III / Pollution degree 3 |

## UL Approvals

|                                |         |
|--------------------------------|---------|
| Approvals per                  | UL 1059 |
| Rated voltage UL (Use Group B) | 600 V   |
| Rated current UL (Use Group B) | 20 A    |
| Rated voltage UL (Use Group C) | 600 V   |
| Rated current UL (Use Group C) | 20 A    |

## CSA Approvals

|                                 |              |
|---------------------------------|--------------|
| Approvals per                   | C22.2 No 158 |
| Rated voltage CSA (Use Group B) | 600 V        |
| Rated current CSA (Use Group B) | 20 A         |
| Rated voltage CSA (Use Group C) | 600 V        |
| Rated current CSA (Use Group C) | 20 A         |
| Rated voltage CSA (Use Group D) | 600 V        |
| Rated current CSA (Use Group D) | 20 A         |

## Ex information

|                                     |                                                               |
|-------------------------------------|---------------------------------------------------------------|
| Ratings per                         | ATEX: PTB 03 ATEX 1162 U / IECEx: PTB 03.0004U (Ex eb IIC Gb) |
| Rated voltage EN (Ex e II)          | 550 V                                                         |
| Rated current (Ex e II)             | 21 A                                                          |
| Rated current (Ex e II) with jumper | 17 A                                                          |
| Note on rated current               | 16 A staggered jumper                                         |

## Connection data

|                                   |                           |
|-----------------------------------|---------------------------|
| Connection technology             | Push-in CAGE CLAMP®       |
| Total number of connection points | 4                         |
| Actuation type                    | Push-in<br>Open Tool Slot |
| Connectable conductor materials   | Copper                    |
| Nominal cross-section             | 2.5 mm²                   |

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
 Germantown, WI 53022  
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
 Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



|                                                            |                                                                                                                                   |
|------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Solid conductor                                            | 0.25 ... 4 mm <sup>2</sup> / 22 ... 12 AWG                                                                                        |
| Solid conductor; push-in termination                       | 0.75 ... 4 mm <sup>2</sup> / 18 ... 12 AWG                                                                                        |
| Fine-stranded conductor                                    | 0.25 ... 4 mm <sup>2</sup> / 22 ... 12 AWG                                                                                        |
| Fine-stranded conductor; with insulated ferrule            | 0.25 ... 2.5 mm <sup>2</sup> / 22 ... 14 AWG                                                                                      |
| Fine-stranded conductor; with ferrule; push-in termination | 1 ... 2.5 mm <sup>2</sup> / 18 ... 14 AWG                                                                                         |
| Note (conductor cross-section)                             | Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination. |
| Strip length                                               | 10 ... 12 mm / 0.39 ... 0.47 inch                                                                                                 |
| Number of connection points 2                              | 4                                                                                                                                 |
| Total number of connection points                          | 8                                                                                                                                 |
| Total number of potentials                                 | 2                                                                                                                                 |
| Number of levels                                           | 2                                                                                                                                 |
| Wiring direction                                           | Front-entry wiring                                                                                                                |

### Physical data

|                                   |                       |
|-----------------------------------|-----------------------|
| Width                             | 5.2 mm / 0.205 inch   |
| Height                            | 105.1 mm / 4.138 inch |
| Depth from upper edge of DIN-rail | 52.1 mm / 2.051 inch  |

### Mechanical data

|                   |                     |
|-------------------|---------------------|
| Potential marking | L/L                 |
| Design            | horizontal type     |
| Mounting type     | DIN-35 rail         |
| Marking level     | Center/side marking |

### Material data

|                             |                  |
|-----------------------------|------------------|
| Color                       | gray             |
| Insulation material         | Polyamide (PA66) |
| Flammability class per UL94 | V0               |
| Fire load                   | 0.291 MJ         |
| Weight                      | 15.8 g           |

### Commercial data

|                   |               |
|-------------------|---------------|
| Product Group     | 22 (TOPJOB S) |
| Packaging type    | box           |
| Country of origin | CN            |
| GTIN              | 4050821144960 |

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
 Germantown, WI 53022  
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
 Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

Customs tariff number 8536904000

## Approvals / Certificates

### Ex-Approvals

| Logo                                                                               | Approval                                              | Additional Approval Text | Certificate name                                                                 |
|------------------------------------------------------------------------------------|-------------------------------------------------------|--------------------------|----------------------------------------------------------------------------------|
|    | <b>AEx</b><br>Underwriters Laboratories Inc.          | UL 60079                 | 20190704-E185892                                                                 |
|    | <b>ATEX</b><br>Physikalisch Technische Bundesanstalt  | EN 60079                 | PTB 03<br>ATEX<br>1162 U (II<br>2 G Ex eb<br>IIC Gb<br>bzw. I M 2<br>Ex eb I Mb) |
|    | <b>EAC</b><br>Brjansker Zertifizierungsstelle         | TP TC 012/2011           | RU C-DE.<br>AM02.B.<br>00127/19                                                  |
|  | <b>IECEX</b><br>Physikalisch Technische Bundesanstalt | IEC 60079                | IECEX PTB<br>03.0004U<br>(Ex eb IIC<br>Gb or Ex<br>eb I Mb)                      |

### Country specific Approvals

| Logo                                                                               | Approval                                     | Additional Approval Text | Certificate name |
|------------------------------------------------------------------------------------|----------------------------------------------|--------------------------|------------------|
|  | <b>CCA</b><br>DEKRA Certification B.V.       | EN 60947                 | NTR NL<br>7730   |
|  | <b>CCA</b><br>DEKRA Certification B.V.       | C22.2 No. 158            | 1536069          |
|  | <b>KEMA/KEUR</b><br>DEKRA Certification B.V. | EN 60947                 | 71-<br>107687    |

### Ship Approvals

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
 Germantown, WI 53022  
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
 Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



| Logo                                                                              | Approval                                                | Additional Approval Text | Certificate name |
|-----------------------------------------------------------------------------------|---------------------------------------------------------|--------------------------|------------------|
|   | <b>ABS</b><br>American Bureau of Shipping               | EN 60947                 | 20-HG1941090-PDA |
|  | <b>BV</b><br>Bureau Veritas S.A.                        | EN 60947                 | 38586/A0 BV      |
|   | <b>DNV GL</b><br>Det Norske Veritas, Germanischer Lloyd | -                        | TAE00001V2       |

#### UL-Approvals

| Logo                                                                             | Approval                                    | Additional Approval Text | Certificate name |
|----------------------------------------------------------------------------------|---------------------------------------------|--------------------------|------------------|
|  | <b>UL</b><br>Underwriters Laboratories Inc. | UL 1059                  | E45172           |

#### Required accessories

##### End plates

|                                                                                   |                                                                                                                          |                                                                    |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|
|  | <b>Item no.: 2002-2491</b><br>TOPJOB®S end/intermediate plate; for 2002-24xx series terminal blocks; 0.8 mm wide; gray   | <a href="http://www.wago.com/2002-2491">www.wago.com/2002-2491</a> |
|  | <b>Item no.: 2002-2492</b><br>TOPJOB®S end/intermediate plate; for 2002-24xx series terminal blocks; 0.8 mm wide; orange | <a href="http://www.wago.com/2002-2492">www.wago.com/2002-2492</a> |

#### Optional accessories

##### Ferrules

|                                                                                   |                                                                                                                                                                                            |                                                                |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
|  | <b>Item no.: 216-241</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white | <a href="http://www.wago.com/216-241">www.wago.com/216-241</a> |
|  | <b>Item no.: 216-242</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray | <a href="http://www.wago.com/216-242">www.wago.com/216-242</a> |
|  | <b>Item no.: 216-243</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red     | <a href="http://www.wago.com/216-243">www.wago.com/216-243</a> |

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

|                                                                                  |                                                                                                                                                                                            |                                                                |
|----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
|  | <b>Item no.: 216-244</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black | <a href="http://www.wago.com/216-244">www.wago.com/216-244</a> |
|  | <b>Item no.: 216-246</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue  | <a href="http://www.wago.com/216-246">www.wago.com/216-246</a> |
|  | <b>Item no.: 216-262</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray | <a href="http://www.wago.com/216-262">www.wago.com/216-262</a> |
|  | <b>Item no.: 216-263</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red     | <a href="http://www.wago.com/216-263">www.wago.com/216-263</a> |
|  | <b>Item no.: 216-264</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black | <a href="http://www.wago.com/216-264">www.wago.com/216-264</a> |
|  | <b>Item no.: 216-266</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue  | <a href="http://www.wago.com/216-266">www.wago.com/216-266</a> |

#### Insulations stops

|                                                                                   |                                                                                                                                          |                                                                  |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|
|   | <b>Item no.: 2002-171</b><br>TOPJOB®S insulation stop; for 2002 series terminal blocks; 0.25 - 0.5 mm <sup>2</sup> ; 5/strip; light gray | <a href="http://www.wago.com/2002-171">www.wago.com/2002-171</a> |
|  | <b>Item no.: 2002-172</b><br>TOPJOB®S insulation stop; for 2002 series terminal blocks; 0.75 - 1.0 mm <sup>2</sup> ; 5/strip; dark gray  | <a href="http://www.wago.com/2002-172">www.wago.com/2002-172</a> |

#### Tools

|                                                                                    |                                                                                                                                 |                                                                |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
|  | <b>Item no.: 210-658</b><br>Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; angled; short; multicoloured | <a href="http://www.wago.com/210-658">www.wago.com/210-658</a> |
|  | <b>Item no.: 210-720</b><br>Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured                | <a href="http://www.wago.com/210-720">www.wago.com/210-720</a> |

#### Push-in type wire jumper

|                                                                                    |                                                                                                                                                                                              |                                                                                  |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
|  | <b>Item no.: 2009-412</b><br>TOPJOB®S wire jumper; insulated; 60 mm long; conductor cross section 1.5 mm <sup>2</sup> ; suitable for 2001, 2002, 2003 and 2022 series terminal blocks; gray  | <a href="http://www.wago.com/2009-412">www.wago.com/2009-412</a>                 |
|  | <b>Item no.: 2009-414</b><br>TOPJOB®S wire jumper; insulated; 110 mm long; conductor cross section 1.5 mm <sup>2</sup> ; suitable for 2001, 2002, 2003 and 2022 series terminal blocks; gray | <a href="http://www.wago.com/2009-414">www.wago.com/2009-414</a>                 |
|  | <b>Item no.: 2009-414/000-005</b><br>Push-in type wire jumper; 1.5 mm <sup>2</sup> ; insulated; 110 mm long; black                                                                           | <a href="http://www.wago.com/2009-414/000-005">www.wago.com/2009-414/000-005</a> |
|  | <b>Item no.: 2009-414/000-006</b><br>Push-in type wire jumper; insulated; 110 mm long; black                                                                                                 | <a href="http://www.wago.com/2009-414/000-006">www.wago.com/2009-414/000-006</a> |
|  | <b>Item no.: 2009-416</b><br>TOPJOB®S wire jumper; insulated; 250 mm long; conductor cross section 1.5 mm <sup>2</sup> ; suitable for 2001, 2002, 2003 and 2022 series terminal blocks; gray | <a href="http://www.wago.com/2009-416">www.wago.com/2009-416</a>                 |

Subject to changes. Please also observe the further product documentation!

## Jumpers

|                                                                                    |                                                                                                                                |                                                                                  |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
|    | <b>Item no.: 2002-400</b><br>TOPJOB®S endless jumper; for 2002 series; insulated; 2-way; light-gray                            | <a href="http://www.wago.com/2002-400">www.wago.com/2002-400</a>                 |
|    | <b>Item no.: 2002-402</b><br>TOPJOB®S jumper; for 2002 series; insulated; 2-way; light-gray                                    | <a href="http://www.wago.com/2002-402">www.wago.com/2002-402</a>                 |
|    | <b>Item no.: 2002-402/000-005</b><br>TOPJOB®S jumper; for 2002 series; insulated; 2-way; red                                   | <a href="http://www.wago.com/2002-402/000-005">www.wago.com/2002-402/000-005</a> |
|    | <b>Item no.: 2002-402/000-006</b><br>TOPJOB®S jumper; for 2002 series; insulated; 2-way; blue                                  | <a href="http://www.wago.com/2002-402/000-006">www.wago.com/2002-402/000-006</a> |
|    | <b>Item no.: 2002-403</b><br>TOPJOB®S jumper; for 2002 series; insulated; 3-way; light-gray                                    | <a href="http://www.wago.com/2002-403">www.wago.com/2002-403</a>                 |
|    | <b>Item no.: 2002-403/000-005</b><br>TOPJOB®S jumper; for 2002 series; insulated; 3-way; red                                   | <a href="http://www.wago.com/2002-403/000-005">www.wago.com/2002-403/000-005</a> |
|    | <b>Item no.: 2002-403/000-006</b><br>TOPJOB®S jumper; for 2002 series; insulated; 3-way; blue                                  | <a href="http://www.wago.com/2002-403/000-006">www.wago.com/2002-403/000-006</a> |
|   | <b>Item no.: 2002-404</b><br>TOPJOB®S jumper; for 2002 series; insulated; 4-way; light-gray                                    | <a href="http://www.wago.com/2002-404">www.wago.com/2002-404</a>                 |
|  | <b>Item no.: 2002-404/000-005</b><br>TOPJOB®S jumper; for 2002 series; insulated; 4-way; red                                   | <a href="http://www.wago.com/2002-404/000-005">www.wago.com/2002-404/000-005</a> |
|  | <b>Item no.: 2002-404/000-006</b><br>TOPJOB®S jumper; for 2002 series; insulated; 4-way; blue                                  | <a href="http://www.wago.com/2002-404/000-006">www.wago.com/2002-404/000-006</a> |
|  | <b>Item no.: 2002-405</b><br>TOPJOB®S jumper; for 2002 series; insulated; 5-way; light-gray                                    | <a href="http://www.wago.com/2002-405">www.wago.com/2002-405</a>                 |
|  | <b>Item no.: 2002-405/000-005</b><br>TOPJOB®S jumper; for 2002 series; insulated; 5-way; red                                   | <a href="http://www.wago.com/2002-405/000-005">www.wago.com/2002-405/000-005</a> |
|  | <b>Item no.: 2002-405/000-006</b><br>TOPJOB®S jumper; for 2002 series; insulated; 5-way; blue                                  | <a href="http://www.wago.com/2002-405/000-006">www.wago.com/2002-405/000-006</a> |
|  | <b>Item no.: 2002-405/011-000</b><br>TOPJOB®S jumper; Wye configuration; for 2002 series; insulated; 3-way (1-3-5); light-gray | <a href="http://www.wago.com/2002-405/011-000">www.wago.com/2002-405/011-000</a> |
|                                                                                    | <b>Item no.: 2002-406</b>                                                                                                      |                                                                                  |

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
 Germantown, WI 53022  
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
 Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

|                                                                                    |                                                                                                                                   |                                                                                  |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
|     | TOPJOB®S jumper; for 2002 series; insulated; 6-way; light-gray                                                                    | <a href="http://www.wago.com/2002-406">www.wago.com/2002-406</a>                 |
|     | Item no.: 2002-406/000-005<br>TOPJOB®S jumper; for 2002 series; insulated; 6-way; red                                             | <a href="http://www.wago.com/2002-406/000-005">www.wago.com/2002-406/000-005</a> |
|     | Item no.: 2002-406/000-006<br>TOPJOB®S jumper; for 2002 series; insulated; 6-way; blue                                            | <a href="http://www.wago.com/2002-406/000-006">www.wago.com/2002-406/000-006</a> |
|     | Item no.: 2002-406/020-000<br>TOPJOB®S jumper; Delta configuration; for 2002 series; insulated; 6-way (1-2, 3-4, 5-6); light-gray | <a href="http://www.wago.com/2002-406/020-000">www.wago.com/2002-406/020-000</a> |
|    | Item no.: 2002-407<br>TOPJOB®S jumper; for 2002 series; insulated; 7-way; light-gray                                              | <a href="http://www.wago.com/2002-407">www.wago.com/2002-407</a>                 |
|     | Item no.: 2002-407/000-005<br>TOPJOB®S jumper; for 2002 series; insulated; 7-way; red                                             | <a href="http://www.wago.com/2002-407/000-005">www.wago.com/2002-407/000-005</a> |
|     | Item no.: 2002-407/000-006<br>TOPJOB®S jumper; for 2002 series; insulated; 7-way; blue                                            | <a href="http://www.wago.com/2002-407/000-006">www.wago.com/2002-407/000-006</a> |
|   | Item no.: 2002-408<br>TOPJOB®S jumper; for 2002 series; insulated; 8-way; light-gray                                              | <a href="http://www.wago.com/2002-408">www.wago.com/2002-408</a>                 |
|   | Item no.: 2002-408/000-005<br>TOPJOB®S jumper; for 2002 series; insulated; 8-way; red                                             | <a href="http://www.wago.com/2002-408/000-005">www.wago.com/2002-408/000-005</a> |
|   | Item no.: 2002-408/000-006<br>TOPJOB®S jumper; for 2002 series; insulated; 8-way; blue                                            | <a href="http://www.wago.com/2002-408/000-006">www.wago.com/2002-408/000-006</a> |
|  | Item no.: 2002-409<br>TOPJOB®S jumper; for 2002 series; insulated; 9-way; light-gray                                              | <a href="http://www.wago.com/2002-409">www.wago.com/2002-409</a>                 |
|   | Item no.: 2002-409/000-005<br>TOPJOB®S jumper; for 2002 series; insulated; 9-way; red                                             | <a href="http://www.wago.com/2002-409/000-005">www.wago.com/2002-409/000-005</a> |
|   | Item no.: 2002-409/000-006<br>TOPJOB®S jumper; for 2002 series; insulated; 9-way; light-gray                                      | <a href="http://www.wago.com/2002-409/000-006">www.wago.com/2002-409/000-006</a> |
|   | Item no.: 2002-410<br>TOPJOB®S jumper; for 2002 series; insulated; 10-way; light-gray                                             | <a href="http://www.wago.com/2002-410">www.wago.com/2002-410</a>                 |
|   | Item no.: 2002-410/000-005<br>TOPJOB®S jumper; for 2002 series; insulated; 10-way; red                                            | <a href="http://www.wago.com/2002-410/000-005">www.wago.com/2002-410/000-005</a> |

Subject to changes. Please also observe the further product documentation!

|                                                                                   |                                                                                                                                 |                                                                                  |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
|    | <b>Item no.: 2002-410/000-006</b><br>TOPJOB®S jumper; for 2002 series; insulated; 10-way; blue                                  | <a href="http://www.wago.com/2002-410/000-006">www.wago.com/2002-410/000-006</a> |
|    | <b>Item no.: 2002-423</b><br>TOPJOB®S endless jumper; for 2002 series; insulated; 2-way (1-3); light-gray                       | <a href="http://www.wago.com/2002-423">www.wago.com/2002-423</a>                 |
|    | <b>Item no.: 2002-423/000-005</b><br>TOPJOB®S endless jumper; for 2002 series; insulated; 2-way (1-3); red                      | <a href="http://www.wago.com/2002-423/000-005">www.wago.com/2002-423/000-005</a> |
|    | <b>Item no.: 2002-423/000-006</b><br>TOPJOB®S endless jumper; for 2002 series; insulated; 2-way (1-3); blue                     | <a href="http://www.wago.com/2002-423/000-006">www.wago.com/2002-423/000-006</a> |
|    | <b>Item no.: 2002-433</b><br>TOPJOB®S jumper; for 2002 series; insulated; 2-way (1-3); light-gray                               | <a href="http://www.wago.com/2002-433">www.wago.com/2002-433</a>                 |
|    | <b>Item no.: 2002-434</b><br>TOPJOB®S jumper; for 2002 series; insulated; 2-way (1-4); light-gray                               | <a href="http://www.wago.com/2002-434">www.wago.com/2002-434</a>                 |
|    | <b>Item no.: 2002-435</b><br>TOPJOB®S jumper; for 2002 series; insulated; 2-way (1-5); light-gray                               | <a href="http://www.wago.com/2002-435">www.wago.com/2002-435</a>                 |
|    | <b>Item no.: 2002-436</b><br>TOPJOB®S jumper; for 2002 series; insulated; 2-way (1-6); light-gray                               | <a href="http://www.wago.com/2002-436">www.wago.com/2002-436</a>                 |
|   | <b>Item no.: 2002-437</b><br>TOPJOB®S jumper; for 2002 series; insulated; 2-way (1-7); light-gray                               | <a href="http://www.wago.com/2002-437">www.wago.com/2002-437</a>                 |
|  | <b>Item no.: 2002-438</b><br>TOPJOB®S jumper; for 2002 series; insulated; 2-way (1-8); light-gray                               | <a href="http://www.wago.com/2002-438">www.wago.com/2002-438</a>                 |
|  | <b>Item no.: 2002-439</b><br>TOPJOB®S jumper; for 2002 series; insulated; 2-way (1-9); light-gray                               | <a href="http://www.wago.com/2002-439">www.wago.com/2002-439</a>                 |
|  | <b>Item no.: 2002-440</b><br>TOPJOB®S jumper; for 2002 series; insulated; 2-way (1-10); light-gray                              | <a href="http://www.wago.com/2002-440">www.wago.com/2002-440</a>                 |
|  | <b>Item no.: 2002-472</b><br>TOPJOB®S staggered jumper; for 2002 and 2003 series; insulated; 2-way; light-gray                  | <a href="http://www.wago.com/2002-472">www.wago.com/2002-472</a>                 |
|  | <b>Item no.: 2002-473</b><br>TOPJOB®S staggered jumper; for 2002 and 2003 series; insulated; 3-way; light-gray                  | <a href="http://www.wago.com/2002-473">www.wago.com/2002-473</a>                 |
|  | <b>Item no.: 2002-473/011-000</b><br>TOPJOB®S staggered jumper; for 2002 and 2003 series; 2-way (preconfigured 1-3); light-gray | <a href="http://www.wago.com/2002-473/011-000">www.wago.com/2002-473/011-000</a> |
|  | <b>Item no.: 2002-474</b><br>TOPJOB®S staggered jumper; for 2002 and 2003 series; insulated; 4-way; light-gray                  | <a href="http://www.wago.com/2002-474">www.wago.com/2002-474</a>                 |
|  | <b>Item no.: 2002-475</b><br>TOPJOB®S staggered jumper; for 2002 and 2003 series; insulated; 5-way; light-gray                  | <a href="http://www.wago.com/2002-475">www.wago.com/2002-475</a>                 |

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
 Germantown, WI 53022  
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
 Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



|                                                                                   |                                                                                                                                                     |                                                                                  |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
|    | <b>Item no.: 2002-475/011-000</b><br>TOPJOB®S staggered jumper; for 2002 and 2003 series; insulated; 3-way (preconfigured 1-3-5); light-gray        | <a href="http://www.wago.com/2002-475/011-000">www.wago.com/2002-475/011-000</a> |
|    | <b>Item no.: 2002-476</b><br>TOPJOB®S staggered jumper; for 2002 and 2003 series; insulated; 6-way; light-gray                                      | <a href="http://www.wago.com/2002-476">www.wago.com/2002-476</a>                 |
|    | <b>Item no.: 2002-477</b><br>TOPJOB®S staggered jumper; for 2002 and 2003 series; insulated; 7-way; light-gray                                      | <a href="http://www.wago.com/2002-477">www.wago.com/2002-477</a>                 |
|    | <b>Item no.: 2002-477/011-000</b><br>TOPJOB®S staggered jumper; for 2002 and 2003 series; insulated; 4-way (preconfigured 1-3-5-7); light-gray      | <a href="http://www.wago.com/2002-477/011-000">www.wago.com/2002-477/011-000</a> |
|    | <b>Item no.: 2002-478</b><br>TOPJOB®S staggered jumper; for 2002 and 2003 series; insulated; 8-way; light-gray                                      | <a href="http://www.wago.com/2002-478">www.wago.com/2002-478</a>                 |
|    | <b>Item no.: 2002-479</b><br>TOPJOB®S staggered jumper; for 2002 and 2003 series; insulated; 9-way; light-gray                                      | <a href="http://www.wago.com/2002-479">www.wago.com/2002-479</a>                 |
|    | <b>Item no.: 2002-479/011-000</b><br>TOPJOB®S staggered jumper; for 2002 and 2003 series; insulated; 5-way (preconfigured 1-3-5-7-9); light-gray    | <a href="http://www.wago.com/2002-479/011-000">www.wago.com/2002-479/011-000</a> |
|    | <b>Item no.: 2002-480</b><br>TOPJOB®S staggered jumper; for 2002 and 2003 series; insulated; 10-way; light-gray                                     | <a href="http://www.wago.com/2002-480">www.wago.com/2002-480</a>                 |
|  | <b>Item no.: 2002-481</b><br>TOPJOB®S staggered jumper; for 2002 and 2003 series; insulated; 11-way; light-gray                                     | <a href="http://www.wago.com/2002-481">www.wago.com/2002-481</a>                 |
|  | <b>Item no.: 2002-481/011-000</b><br>TOPJOB®S staggered jumper; for 2002 and 2003 series; insulated; 6-way (preconfigured 1-3-5-7-9-11); light-gray | <a href="http://www.wago.com/2002-481/011-000">www.wago.com/2002-481/011-000</a> |
|  | <b>Item no.: 2002-482</b><br>TOPJOB®S staggered jumper; for 2002 and 2003 series; insulated; 12-way; light-gray                                     | <a href="http://www.wago.com/2002-482">www.wago.com/2002-482</a>                 |
|  | <b>Item no.: 2002-492</b><br>TOPJOB®S double-deck vertical jumper; for 2002 series; insulated; double-deck; light-gray                              | <a href="http://www.wago.com/2002-492">www.wago.com/2002-492</a>                 |
|  | <b>Item no.: 2002-492/000-012</b><br>TOPJOB®S double-deck vertical jumper; for 2002 series; insulated; double-deck; orange                          | <a href="http://www.wago.com/2002-492/000-012">www.wago.com/2002-492/000-012</a> |
|  | <b>Item no.: 210-103</b><br>Wire commoning chain; insulated; black                                                                                  | <a href="http://www.wago.com/210-103">www.wago.com/210-103</a>                   |
|  | <b>Item no.: 210-123</b><br>Wire commoning chain; insulated; blue                                                                                   | <a href="http://www.wago.com/210-123">www.wago.com/210-123</a>                   |
| <b>Marking accessories</b>                                                        |                                                                                                                                                     |                                                                                  |
|  | <b>Item no.: 2002-121</b><br>Adaptor; gray                                                                                                          | <a href="http://www.wago.com/2002-121">www.wago.com/2002-121</a>                 |

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
 Germantown, WI 53022  
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
 Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

**Item no.: 2002-161**

Adaptor; gray

[www.wago.com/2002-161](http://www.wago.com/2002-161)**Item no.: 2009-110**

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

[www.wago.com/2009-110](http://www.wago.com/2009-110)**Item no.: 2009-115**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/2009-115](http://www.wago.com/2009-115)**Item no.: 2009-115/000-002**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

[www.wago.com/2009-115/000-002](http://www.wago.com/2009-115/000-002)**Item no.: 2009-115/000-005**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red

[www.wago.com/2009-115/000-005](http://www.wago.com/2009-115/000-005)**Item no.: 2009-115/000-006**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue

[www.wago.com/2009-115/000-006](http://www.wago.com/2009-115/000-006)**Item no.: 2009-115/000-007**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray

[www.wago.com/2009-115/000-007](http://www.wago.com/2009-115/000-007)**Item no.: 2009-115/000-012**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange

[www.wago.com/2009-115/000-012](http://www.wago.com/2009-115/000-012)**Item no.: 2009-115/000-017**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green

[www.wago.com/2009-115/000-017](http://www.wago.com/2009-115/000-017)**Item no.: 2009-115/000-023**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green

[www.wago.com/2009-115/000-023](http://www.wago.com/2009-115/000-023)**Item no.: 2009-115/000-024**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet

[www.wago.com/2009-115/000-024](http://www.wago.com/2009-115/000-024)**Item no.: 2009-145**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/2009-145](http://www.wago.com/2009-145)**Item no.: 2009-145/000-002**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

[www.wago.com/2009-145/000-002](http://www.wago.com/2009-145/000-002)**Item no.: 2009-145/000-005**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red

[www.wago.com/2009-145/000-005](http://www.wago.com/2009-145/000-005)

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
 Germantown, WI 53022  
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
 Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



|                                                                                    |                                                                                                                                                   |                                                                                  |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
|     | <b>Item no.: 2009-145/000-006</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue   | <a href="http://www.wago.com/2009-145/000-006">www.wago.com/2009-145/000-006</a> |
|     | <b>Item no.: 2009-145/000-007</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray   | <a href="http://www.wago.com/2009-145/000-007">www.wago.com/2009-145/000-007</a> |
|     | <b>Item no.: 2009-145/000-012</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange | <a href="http://www.wago.com/2009-145/000-012">www.wago.com/2009-145/000-012</a> |
|     | <b>Item no.: 2009-145/000-023</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green  | <a href="http://www.wago.com/2009-145/000-023">www.wago.com/2009-145/000-023</a> |
|     | <b>Item no.: 2009-145/000-024</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet | <a href="http://www.wago.com/2009-145/000-024">www.wago.com/2009-145/000-024</a> |
|    | <b>Item no.: 2009-191</b><br>Group marker carrier                                                                                                 | <a href="http://www.wago.com/2009-191">www.wago.com/2009-191</a>                 |
|    | <b>Item no.: 2009-192</b><br>Group marker carrier                                                                                                 | <a href="http://www.wago.com/2009-192">www.wago.com/2009-192</a>                 |
|   | <b>Item no.: 2009-193</b><br>Group marker carrier                                                                                                 | <a href="http://www.wago.com/2009-193">www.wago.com/2009-193</a>                 |
|  | <b>Item no.: 2009-198</b><br>Adaptor; gray                                                                                                        | <a href="http://www.wago.com/2009-198">www.wago.com/2009-198</a>                 |
|   | <b>Item no.: 248-501</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white                                           | <a href="http://www.wago.com/248-501">www.wago.com/248-501</a>                   |
|   | <b>Item no.: 248-501/000-002</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow                                  | <a href="http://www.wago.com/248-501/000-002">www.wago.com/248-501/000-002</a>   |
|   | <b>Item no.: 248-501/000-005</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red                                     | <a href="http://www.wago.com/248-501/000-005">www.wago.com/248-501/000-005</a>   |
|   | <b>Item no.: 248-501/000-006</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue                                    | <a href="http://www.wago.com/248-501/000-006">www.wago.com/248-501/000-006</a>   |
|   | <b>Item no.: 248-501/000-007</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray                                    | <a href="http://www.wago.com/248-501/000-007">www.wago.com/248-501/000-007</a>   |
|   | <b>Item no.: 248-501/000-012</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange                                  | <a href="http://www.wago.com/248-501/000-012">www.wago.com/248-501/000-012</a>   |

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
 Germantown, WI 53022  
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
 Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

|                                                                                   |                                                                                                                                                  |                                                                                |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
|    | <b>Item no.: 248-501/000-017</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green                            | <a href="http://www.wago.com/248-501/000-017">www.wago.com/248-501/000-017</a> |
|    | <b>Item no.: 248-501/000-023</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green                                  | <a href="http://www.wago.com/248-501/000-023">www.wago.com/248-501/000-023</a> |
|    | <b>Item no.: 248-501/000-024</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet                                 | <a href="http://www.wago.com/248-501/000-024">www.wago.com/248-501/000-024</a> |
|    | <b>Item no.: 793-501</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; white                                               | <a href="http://www.wago.com/793-501">www.wago.com/793-501</a>                 |
|    | <b>Item no.: 793-501/000-002</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; yellow                                      | <a href="http://www.wago.com/793-501/000-002">www.wago.com/793-501/000-002</a> |
|    | <b>Item no.: 793-501/000-005</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; red                                         | <a href="http://www.wago.com/793-501/000-005">www.wago.com/793-501/000-005</a> |
|    | <b>Item no.: 793-501/000-006</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; blue                                        | <a href="http://www.wago.com/793-501/000-006">www.wago.com/793-501/000-006</a> |
|  | <b>Item no.: 793-501/000-007</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; gray                                        | <a href="http://www.wago.com/793-501/000-007">www.wago.com/793-501/000-007</a> |
|  | <b>Item no.: 793-501/000-012</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; orange                                      | <a href="http://www.wago.com/793-501/000-012">www.wago.com/793-501/000-012</a> |
|  | <b>Item no.: 793-501/000-017</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; light green                                 | <a href="http://www.wago.com/793-501/000-017">www.wago.com/793-501/000-017</a> |
|  | <b>Item no.: 793-501/000-023</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; green                                       | <a href="http://www.wago.com/793-501/000-023">www.wago.com/793-501/000-023</a> |
|  | <b>Item no.: 793-501/000-024</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; violet                                      | <a href="http://www.wago.com/793-501/000-024">www.wago.com/793-501/000-024</a> |
|  | <b>Item no.: 793-5501</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white | <a href="http://www.wago.com/793-5501">www.wago.com/793-5501</a>               |
|                                                                                   | <b>Item no.: 793-5501/000-002</b>                                                                                                                |                                                                                |

Subject to changes. Please also observe the further product documentation!



|                                                                                   |                                                                                                                                                                |                                                                                  |
|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
|    | WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; yellow                                           | <a href="http://www.wago.com/793-5501/000-002">www.wago.com/793-5501/000-002</a> |
|    | <b>Item no.: 793-5501/000-005</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; red         | <a href="http://www.wago.com/793-5501/000-005">www.wago.com/793-5501/000-005</a> |
|    | <b>Item no.: 793-5501/000-006</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; blue        | <a href="http://www.wago.com/793-5501/000-006">www.wago.com/793-5501/000-006</a> |
|    | <b>Item no.: 793-5501/000-007</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; gray        | <a href="http://www.wago.com/793-5501/000-007">www.wago.com/793-5501/000-007</a> |
|    | <b>Item no.: 793-5501/000-012</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; orange      | <a href="http://www.wago.com/793-5501/000-012">www.wago.com/793-5501/000-012</a> |
|    | <b>Item no.: 793-5501/000-014</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; brown       | <a href="http://www.wago.com/793-5501/000-014">www.wago.com/793-5501/000-014</a> |
|    | <b>Item no.: 793-5501/000-017</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; green       | <a href="http://www.wago.com/793-5501/000-017">www.wago.com/793-5501/000-017</a> |
|  | <b>Item no.: 793-5501/000-023</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; light green | <a href="http://www.wago.com/793-5501/000-023">www.wago.com/793-5501/000-023</a> |
|  | <b>Item no.: 793-5501/000-024</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; violet      | <a href="http://www.wago.com/793-5501/000-024">www.wago.com/793-5501/000-024</a> |

**Carrier rail**

|                                                                                   |                                                                                                                                                      |                                                                |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
|  | <b>Item no.: 210-112</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored | <a href="http://www.wago.com/210-112">www.wago.com/210-112</a> |
|  | <b>Item no.: 210-113</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored                  | <a href="http://www.wago.com/210-113">www.wago.com/210-113</a> |
|  | <b>Item no.: 210-114</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored                   | <a href="http://www.wago.com/210-114">www.wago.com/210-114</a> |
|  | <b>Item no.: 210-115</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored | <a href="http://www.wago.com/210-115">www.wago.com/210-115</a> |
|  | <b>Item no.: 210-118</b><br>Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored                 | <a href="http://www.wago.com/210-118">www.wago.com/210-118</a> |

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
 Germantown, WI 53022  
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
 Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



|                                                                                   |                                                                                                                                                    |                                                                  |
|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|
|    | <b>Item no.: 210-196</b><br>Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored             | <a href="http://www.wago.com/210-196">www.wago.com/210-196</a>   |
|    | <b>Item no.: 210-197</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored                   | <a href="http://www.wago.com/210-197">www.wago.com/210-197</a>   |
|    | <b>Item no.: 210-198</b><br>Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored              | <a href="http://www.wago.com/210-198">www.wago.com/210-198</a>   |
|    | <b>Item no.: 210-504</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored      | <a href="http://www.wago.com/210-504">www.wago.com/210-504</a>   |
|    | <b>Item no.: 210-505</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored    | <a href="http://www.wago.com/210-505">www.wago.com/210-505</a>   |
|    | <b>Item no.: 210-506</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored     | <a href="http://www.wago.com/210-506">www.wago.com/210-506</a>   |
|    | <b>Item no.: 210-508</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored       | <a href="http://www.wago.com/210-508">www.wago.com/210-508</a>   |
| <b>Testing accessories</b>                                                        |                                                                                                                                                    |                                                                  |
|    | <b>Item no.: 2002-611</b><br>TOPJOB® S modular connector; for 2002 series; for conductor entry way; 1-pole; gray                                   | <a href="http://www.wago.com/2002-611">www.wago.com/2002-611</a> |
|   | <b>Item no.: 2002-649</b><br>TOPJOB® S spacer module; for 2002-611; 5.2 mm wide; gray                                                              | <a href="http://www.wago.com/2002-649">www.wago.com/2002-649</a> |
|  | <b>Item no.: 2009-174</b><br>TOPJOB® S test plug adapter; for test plug 4 mm Ø; for testing TOPJOB® S terminal blocks; gray                        | <a href="http://www.wago.com/2009-174">www.wago.com/2009-174</a> |
|  | <b>Item no.: 2009-182</b><br>TOPJOB® S testing tap; tool-free; 12 AWG max; for testing TOPJOB® S terminal blocks; gray                             | <a href="http://www.wago.com/2009-182">www.wago.com/2009-182</a> |
| <b>End plates</b>                                                                 |                                                                                                                                                    |                                                                  |
|  | <b>Item no.: 209-192</b><br>Separator for Ex e/Ex i applications; 3 mm thick; 125.5 mm wide; orange                                                | <a href="http://www.wago.com/209-192">www.wago.com/209-192</a>   |
| <b>Protective warning marker</b>                                                  |                                                                                                                                                    |                                                                  |
|  | <b>Item no.: 2002-115</b><br>TOPJOB® S protective warning marker; with high-voltage symbol, for 2002 series terminal blocks; for 5 terminal blocks | <a href="http://www.wago.com/2002-115">www.wago.com/2002-115</a> |

## Downloads

### Documentation

#### Bid Text

|             |             |        |          |
|-------------|-------------|--------|----------|
| 2002-2401   | 23 Apr 2019 | xml    | Download |
| X81 - Datei |             | 4.1 kB |          |

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



|              |             |         |          |
|--------------|-------------|---------|----------|
| 2002-2401    | 18 Apr 2019 | docx    | Download |
| docx - Datei |             | 15.4 kB |          |

**Additional Information**

|                        |            |        |          |
|------------------------|------------|--------|----------|
| Technical explanations | 3 Apr 2019 | pdf    | Download |
|                        |            | 2.2 MB |          |

**CAD files****CAD data**

|                        |     |          |
|------------------------|-----|----------|
| 2D/3D Models 2002-2401 | URL | Download |
|------------------------|-----|----------|

**CAE data**

|                             |     |          |
|-----------------------------|-----|----------|
| EPLAN Data Portal 2002-2401 | URL | Download |
|-----------------------------|-----|----------|

|                          |     |          |
|--------------------------|-----|----------|
| WSCAD Universe 2002-2401 | URL | Download |
|--------------------------|-----|----------|

|                        |     |          |
|------------------------|-----|----------|
| ZUKEN Portal 2002-2401 | URL | Download |
|------------------------|-----|----------|

**Environmental Product Compliance****Compliance Search**


|                                                                                                                                                                                                                |     |          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----------|
| Environmental Product Compliance 2002-2401                                                                                                                                                                     | URL | Download |
| 4-conductor double deck terminal block; Through/through terminal block; L/L; without marker carrier; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm <sup>2</sup> ; Push-in CAGE CLAMP®; 2,50 mm <sup>2</sup> ; gray |     |          |

**Installation Notes****Inserting a conductor**

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
 Germantown, WI 53022  
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
 Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

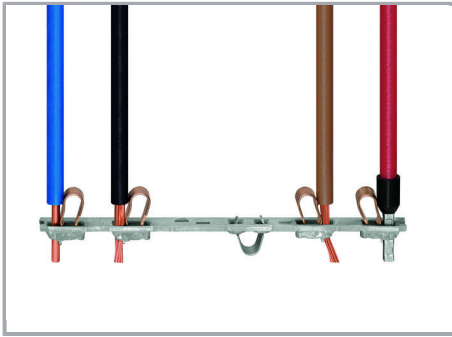

All conductor types at a glance

## Product family

### TOPJOB® S

TOPJOB® S: In various industrial applications and modern building installations, WAGO's wide and versatile range of rail-mount terminal blocks provides more than just reliable electrical connections.

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.