


Features

1 Pole - 6 A electromechanical relay interface modules, 6.2 mm wide.

Ideal interface for PLC and electronic systems


- Sensitive DC coil or AC/DC coil versions
- Integral coil indication and protection circuit
- Instant ejection of relay using plastic retaining clip
- UL Listed
- 35 mm rail (EN 50022) mounting

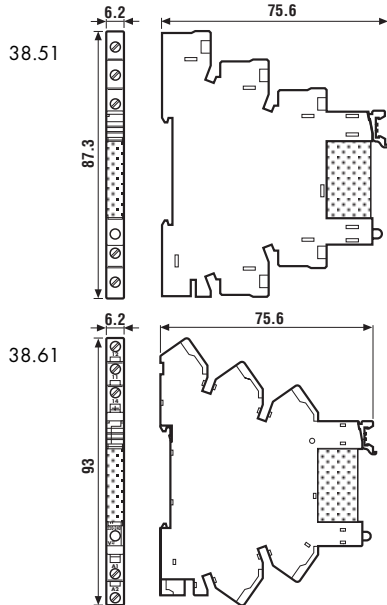

38.51




- Screw terminal
- 1 pole electromechanical relay
- 35 mm rail mounting



38.61




- Screwless terminal
- 1 pole electromechanical relay
- 35 mm rail mounting



38.51.3 / 38.61.3



- Leakage current suppression
- 1 pole electromechanical relay
- 35 mm rail mounting



Contact specification

Contact configuration		1 CO (SPDT)	1 CO (SPDT)	1 CO (SPDT)
Rated current/Maximum peak current	A	6/10	6/10	6/10
Rated voltage/Maximum switching voltage V AC		250/400	250/400	250/400
Rated load AC1	VA	1,500	1,500	1,500
Rated load AC15 (230 V AC)	VA	300	300	300
Single phase motor rating (230 V AC)	kW	0.185	0.185	0.185
Breaking capacity DC1: 30/110/220 V	A	6/0.2/0.15	6/0.2/0.15	6/0.2/0.15
Minimum switching load	mW (V/mA)	500 (12/10)	500 (12/10)	500 (12/10)
Standard contact material		AgNi	AgNi	AgNi

Coil specification

Nominal voltage (U _N)	V AC/DC	12 - 24 - 48 - 60 - (110...125) - (220...240)	(110...125)	(230...240)AC only
	V DC	6 - 12 - 24 - 48 - 60 (non polarized)	—	
Rated power AC/DC	VA (50 Hz)/W	see page 121	see page 121	1/1 0.5/—
Operating range	AC/DC	(0.8...1.1)U _N	(0.8...1.1)U _N	(94...138)U _N (184...264)U _N
	DC	(0.8...1.2)U _N	(0.8...1.2)U _N	—
Holding voltage	AC/DC	0.6 U _N / 0.6 U _N	0.6 U _N / 0.6 U _N	0.6 U _N / 0.6 U _N
Must drop-out voltage	AC/DC	0.1 U _N / 0.05 U _N	0.1 U _N / 0.05 U _N	44 V 92 V

Technical data

Mechanical life	cycles	10 · 10 ⁶	10 · 10 ⁶	10 · 10 ⁶
Electrical life at rated load AC1	cycles	60 · 10 ³	60 · 10 ³	60 · 10 ³
Operate/release time	ms	5/6	5/6	5/6
Insulation between coil and contacts (1.2/50 μs)	kV	6 (8 mm)	6 (8 mm)	6 (8 mm)
Dielectric strength between open contacts	V AC	1,000	1,000	1,000
Ambient temperature range (≤ 60 V / > 60 V)	°C	-40...+70 / -40...+55	-40...+70 / -40...+55	— / -40...+55
Protection category		IP 20	IP 20	IP 20

Approvals relay (according to type)




Features

2 Pole - 8 A electromechanical relay interface modules, 14 mm wide.

Ideal interface for PLC and electronic systems

- Sensitive DC coil versions
- Integral coil indication and protection circuit
- Instant ejection of relay using plastic retaining clip
- 35 mm rail (EN 50022) mounting

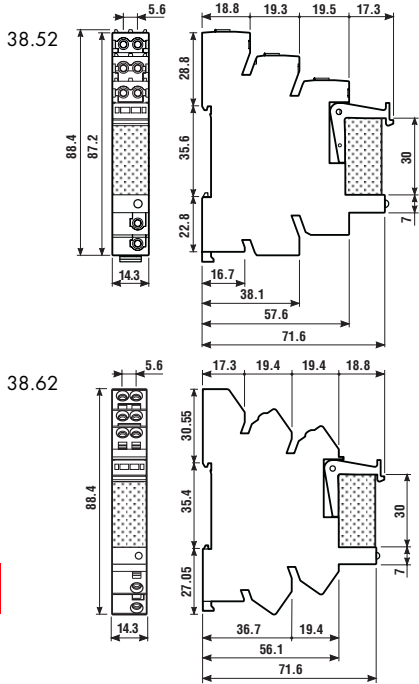


	38.52	38.62
	<ul style="list-style-type: none"> • Screw terminal • 2 pole electromechanical relay • 35 mm rail mounting 	<ul style="list-style-type: none"> • Screwless terminal • 2 pole electromechanical relay • 35 mm rail mounting
Contact specification		
Contact configuration	2 CO (DPDT)	2 CO (DPDT)
Rated current/Maximum peak current A	8/15	8/15
Rated voltage/Maximum switching voltage V AC	250/400	250/400
Rated load AC1 VA	2,000	2,000
Rated load AC15 (230 V AC) VA	400	400
Single phase motor rating (230 V AC) kW	0.3	0.3
Breaking capacity DC1: 30/110/220 V A	8/0.3/0.12	8/0.3/0.12
Minimum switching load mW (V/mA)	300 (5/5)	300 (5/5)
Standard contact material	AgNi	AgNi
Coil specification		
Nominal voltage (U _N) V AC/DC	—	—
V DC	12 - 24 - 60	12 - 24 - 60
Rated power AC/DC VA (50 Hz)/W	—/0.5	—/0.5
Operating range AC/DC	—	—
DC	(0.8...1.2)U _N	(0.8...1.2)U _N
Holding voltage AC/DC	— / 0.6 U _N	— / 0.6 U _N
Must drop-out voltage AC/DC	— / 0.05 U _N	— / 0.05 U _N
Technical data		
Mechanical life cycles	30 · 10 ⁶	30 · 10 ⁶
Electrical life at rated load AC1 cycles	80 · 10 ³	80 · 10 ³
Operate/release time ms	—	—
Insulation between coil and contacts (1.2/50 μs) kV	6 (8 mm)	6 (8 mm)
Dielectric strength between open contacts V AC	1,000	1,000
Ambient temperature range °C	-40...+70	-40...+70
Protection category	IP 20	IP 20
Approvals relay (according to type)		

Features

Single output - solid state relay interface modules, 6.2 mm wide

Ideal interface for PLC and electronic systems


- DC, AC or AC/DC input versions
- Supplied with integral coil indication and protection circuit
- Silent, high switching speed and long electrical life
- Instant ejection of relay using plastic retaining clip
- UL listed
- 35 mm rail (EN 50022) mounting

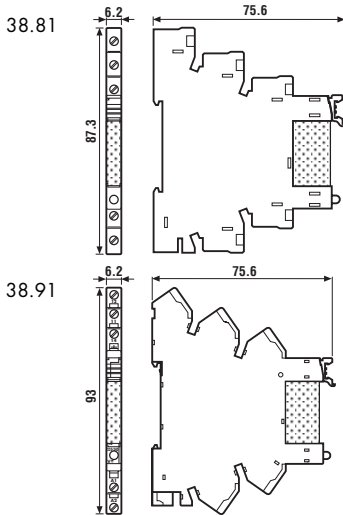

38.81/38.91




- AC or DC output switching
- SSR relay - DC input voltage
- 35 mm rail mounting



38.81.3/38.91.3



- AC or DC output - Leakage current suppression
- SSR relay - AC or AC/DC input voltage
- 35 mm rail mounting



Output circuit

Rated current/Maximum peak current (10 ms)	A	2/20	0.1/0.5	2/40	2/20	0.1/0.5	2/40
Rated voltage/Maximum blocking voltage	V	24/33 DC	48/60 DC	240/275 AC	24/33 DC	48/60 DC	240/275 AC
Switching voltage range	V	(1.5...24)DC	(1.5...48)DC	(12...240)AC	(1.5...24)DC	(1.5...48)DC	(12...240)AC
Minimum switching current	mA	1	0.05	22	1	0.05	22
Max. "OFF-state" leakage current	mA	0.001	0.001	1.5	0.001	0.001	1.5
Max. "ON-state" voltage drop	V	0.12	1	1.6	0.12	1	1.6

Input circuit

Nominal voltage (U _N)	V AC	—		230...240	
	V DC	6 - 24 - 60		—	
	V AC/DC	(110...125) - (220...240)		110...125	
Operating range	V DC	See table page 122		See table page 122	
Control current	mA	See table page 122		See table page 122	
Release voltage	V DC	See table page 122		See table page 122	
Impedance	Ω	See table page 122		See table page 122	

Technical data

Operate/release time	μs	0.1/0.4	0.02/0.11	12/12	0.1/0.4	0.02/0.11	12/12
Dielectric strength between input/output	V	2,500		2,500			
Ambient temperature range	°C	-20...+55		-20...+55			
Environmental protection		IP20		IP20			

Approvals (according to type)




Electromechanical Relay

Ordering information

Electromechanical relay 1 Pole


Example: 38 series relay interface module, 1 CO (SPDT), 12 V DC coil.

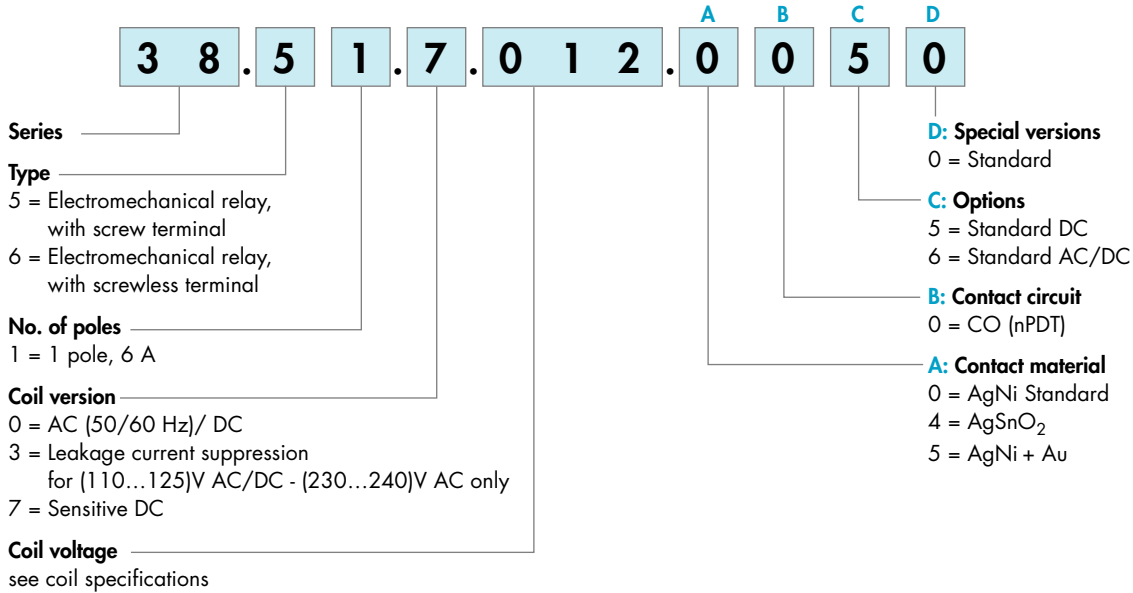

38

Electromechanical relay 2 Pole

Example: 38 series relay interface module, 2 CO (DPDT), 12 V DC coil.

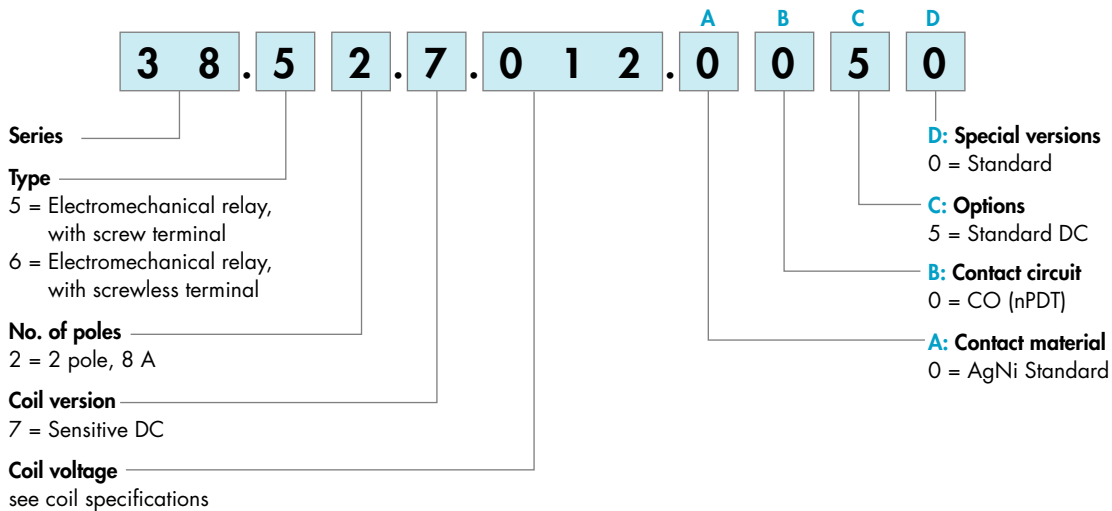


Solid State Relay

Ordering information

Solid state relay

Example: 38 series SSR relay interface module, 2 A, 24 V DC supply.

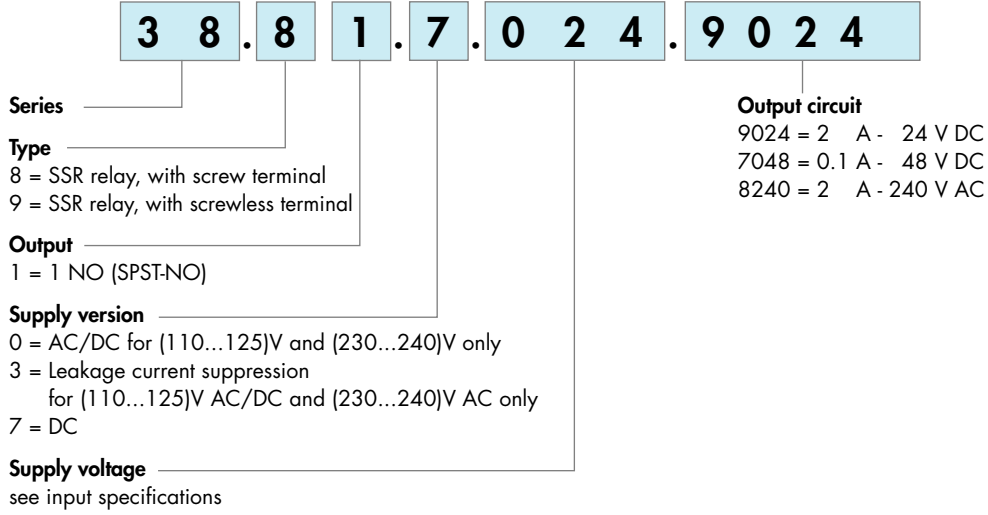

Electromechanical Relay


Technical data

Insulation				
Insulation according to EN 61810-1 ed. 2	insulation rated voltage	V	250	400
	rated impulse withstand voltage	kV	4	4
	pollution degree		3	2
	overvoltage category		III	III
Insulation between coil and contacts (1.2/50 μs)		kV	6 (8 mm)	
Dielectric strength between open contacts		V AC	1,000	
Conducted disturbance immunity				
Burst (5...50)ns, 5 kHz, on A1 - A2			EN 61000-4-4	level 4 (4 kV)
Surge (1.2/50 μs) on A1 - A2 (differential mode)			EN 61000-4-5	level 3 (2 kV)
Other data				
			1 Pole	2 Pole
Bounce time: NO/NC	ms		1/6	2/5
Vibration resistance (10...55)Hz, max. ± 1 mm: NO/NC	g/g		10/5	15/2
Power lost to the environment	without contact current	W	0.2 (12 V) - 0.9 (240 V)	0.5
	with rated current	W	0.5 (12 V) - 1.5 (240 V)	1.3
			38.51/52	38.61/62
Wire strip length	mm		10	10
⊖ Screw torque	Nm		0.5	—
Max. wire size			solid cable	stranded cable
			solid cable	stranded cable
	mm ²		1x2.5/2x1.5	1x2.5
	AWG		1x14/2x16	1x14


38

Contact specification


F 38 - Electrical life (AC) v contact current, 1 Pole

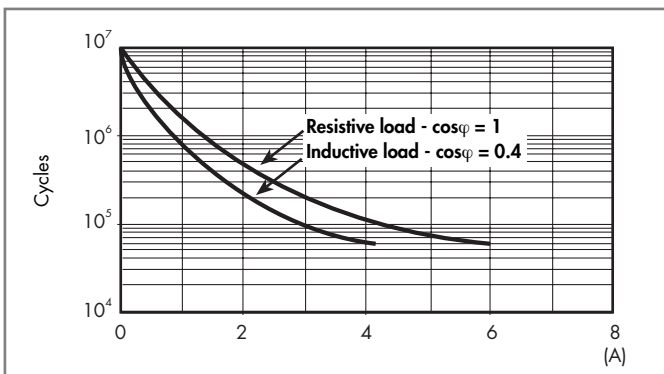


H 38 - Maximum DC1 breaking capacity, 1 Pole

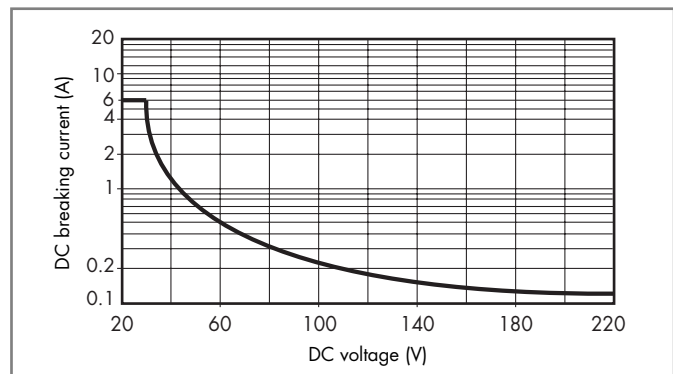

F 38 - Electrical life (AC) v contact current, 2 Pole

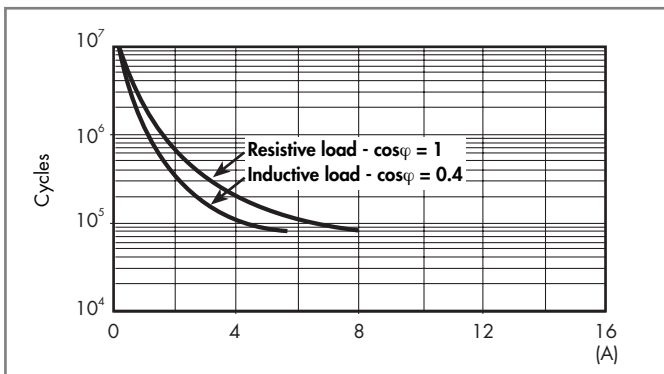

H 38 - Maximum DC1 breaking capacity, 2 Pole

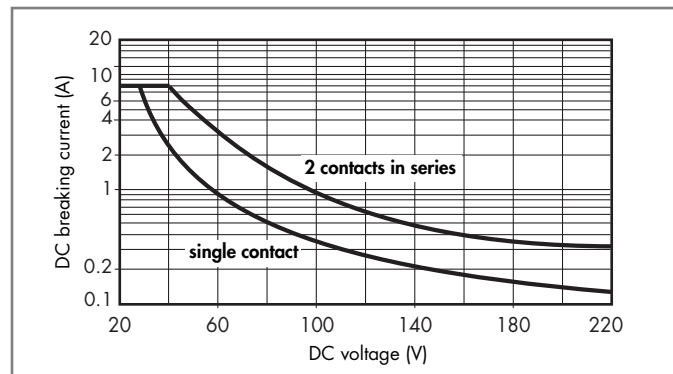

- When switching a resistive load (DC1) having voltage and current values under the curve, an electrical life of $\geq 60 \cdot 10^3$ (1 Pole) or $\geq 80 \cdot 10^3$ (2 Pole) can be expected.
- In the case of DC13 loads, the connection of a diode in parallel with the load will permit a similar electrical life as for a DC1 load. Note: the release time for the load will be increased.

Electromechanical Relay 1 Pole

Coil specifications

Coil data AC/DC, 1 Pole

Nominal voltage U_N	Coil code	Operating range		Rated coil consumption I at U_N	Power consumption P at U_N
		U_{min}	U_{max}		
V		V	V	mA	W
12	0.012	9.8	13.2	16	0.2
24	0.024	19.2	26.4	12	0.2
48	0.048	38.4	52.8	6.9	0.3
60	0.060	48	66	7	0.5
110...125	0.125	88	138	5(*)	0.6(*)
220...240	0.240	184	264	4(*)	0.9(*)

(*) Rated coil consumption and power consumption values relate to $U_N = 125$ and 240 V.

Coil data sensitive DC, 1 Pole

Nominal voltage U_N	Coil code	Operating range		Rated coil consumption I at U_N	Power consumption P at U_N
		U_{min}	U_{max}		
V		V	V	mA	W
6	7.006	5	7.2	35	0.2
12	7.012	9.8	14.4	15.2	0.2
24	7.024	18.2	28.8	10.4	0.3
48	7.048	35	57.6	6.3	0.3
60	7.060	43.5	72	7	0.4

Coil data, leakage current suppression types, 1 Pole

Nominal voltage U_N	Coil code	Operating range		Must drop out U	Rated coil consumption I at U_N	Power consumption P at U_N
		U_{min}	U_{max}			
V		V	V		mA	W
(110...125) AC/DC	3.125	94	138	44	8(*)	1(*)
(230...240) AC	3.240	184	264	92	7(*)	0.5(*)

(*) Rated coil consumption and power consumption values relate to $U_N = 125$ and 240 V.

The 38 Series interface modules (supply version 3) have built-in leakage current suppression to address industry concerns of the contacts not dropping-out when there is residual current in the circuit; at (110...125)V AC and (230...240)V AC.


This problem can occur, for example, when connecting the interface modules to PLC,s with triac outputs or when connecting via relatively long cables.

Electromechanical Relay 2 Pole

Coil specifications

Coil data sensitive DC, 2 Pole

Nominal voltage U_N	Coil code	Operating range		Rated coil consumption I at U_N
		U_{min}	U_{max}	
V		V	V	mA
12	7.012	9.6	14.4	41
24	7.024	19.2	28.8	19.5
60	7.060	48	72	8

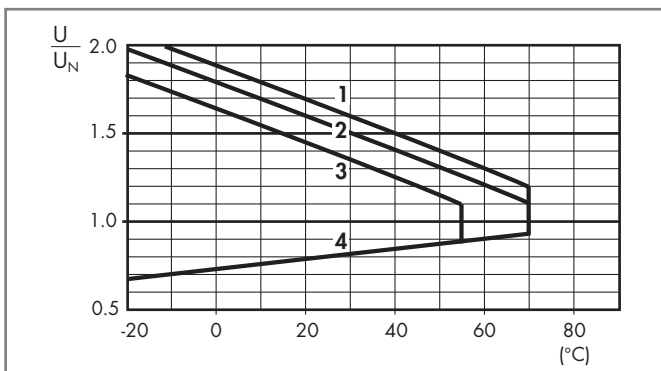R 38 - DC coil operating range v ambient temperature
1 Pole and 2 Pole


- 1 - Max. permitted coil voltage at nominal load (DC coil).
- 2 - Max. permitted coil voltage at nominal load (AC/DC coils ≤ 60 V).
- 3 - Max. permitted coil voltage at nominal load (AC/DC coils > 60 V).
- 4 - Min pick-up voltage with coil at ambient temperature.

Solid State Relay

Technical data

Other data					
Power lost to the environment	without output current	W	0.17		
	with rated current	W	0.4		
			38.81	38.91	
Wire strip length	mm	10	10		
Screw torque	Nm	0.5	—		
Max. wire size		solid cable	stranded cable	solid cable	stranded cable
	mm ²	1x2.5 / 2x1.5	1x2.5 / 2x1.5	1x2.5	1x2.5
	AWG	1x14 / 2x16	1x14 / 2x16	1x14	1x14

Input specification

Input data - AC/DC

Nominal voltage U_N V	Supply code	Operating range		Release voltage U V	Control current I at U_N mA
		U_{min} V	U_{max} V		
110...125	0.125	88	138	45	5
230...240	0.240	184	264	90	4.5

Input data - DC

Nominal voltage U_N V	Supply code	Operating range		Release voltage U V	Control current I at U_N mA
		U_{min} V	U_{max} V		
6	7.006	5	7.2	2.4	7
24	7.024	16.8	30	10	10.5
60	7.060	35.6	72	20	6.5

Input data - Leakage current suppression types

Nominal voltage U_N V	Supply code	Operating range		Release voltage U V	Rated coil consumption I at U_N mA	Power consumption P at U_N W
		U_{min} V	U_{max} V			
110...125 AC/DC	3.125	94	138	44	8(*)	1(*)
230...240 AC	3.240	184	264	72	5.6(*)	0.5(*)

(*) Rated coil consumption and power consumption values relate to $U_N = 125$ and 240 V.

The 38 Series interface modules (supply version 3) have built-in leakage current suppression to address industry concerns of the contacts not dropping-out when there is residual current in the circuit; at (110...125)V AC and (230...240)V AC.

This problem can occur, for example, when connecting the interface modules to PLC,s with triac outputs or when connecting via relatively long cables.



Combination for Electromechanical Relay



Approvals
(according to type):



US Listed: certain relay/
socket combinations



Screw terminal - 1 Pole relay

Code	Supply voltage	Type of relay	Type of socket
38.51.0.012.0060	12 V AC/DC	34.51.7.012.0010	93.01.0.024
38.51.0.024.0060	24 V AC/DC	34.51.7.024.0010	93.01.0.024
38.51.0.048.0060	48 V AC/DC	34.51.7.048.0010	93.01.0.060
38.51.0.060.0060	60 V AC/DC	34.51.7.060.0010	93.01.0.060
38.51.0.125.0060	(110...125)V AC/DC	34.51.7.060.0010	93.01.0.125
38.51.0.240.0060	(220...240)V AC/DC	34.51.7.060.0010	93.01.0.240
38.51.3.125.0060	(110...125)V AC/DC	34.51.7.060.0010	93.01.3.125
38.51.3.240.0060	(230...240)V AC	34.51.7.060.0010	93.01.3.240
38.51.7.006.0050	6 V DC	34.51.7.005.0010	93.01.7.024
38.51.7.012.0050	12 V DC	34.51.7.012.0010	93.01.7.024
38.51.7.024.0050	24 V DC	34.51.7.024.0010	93.01.7.024
38.51.7.048.0050	48 V DC	34.51.7.048.0010	93.01.7.060
38.51.7.060.0050	60 V DC	34.51.7.060.0010	93.01.7.060

Screwless terminal - 1 Pole relay

Code	Supply voltage	Type of relay	Type of socket
38.61.0.012.0060	12 V AC/DC	34.51.7.012.0010	93.51.0.024
38.61.0.024.0060	24 V AC/DC	34.51.7.024.0010	93.51.0.024
38.61.0.125.0060	(110...125)V AC/DC	34.51.7.060.0010	93.51.0.125
38.61.0.240.0060	(220...240)V AC/DC	34.51.7.060.0010	93.51.0.240
38.61.3.125.0060	(110...125)V AC/DC	34.51.7.060.0010	93.51.3.125
38.61.3.240.0060	(230...240)V AC	34.51.7.060.0010	93.51.3.240
38.61.7.012.0050	12 V DC	34.51.7.012.0010	93.51.7.024
38.61.7.024.0050	24 V DC	34.51.7.024.0010	93.51.7.024

Screw terminal - 2 Pole relay

Code	Supply voltage	Type of relay	Type of socket
38.52.7.012.0050	12 V DC	41.52.9.012.0010	93.02.7.024
38.52.7.024.0050	24 V DC	41.52.9.024.0010	93.02.7.024
38.52.7.060.0050	60 V DC	41.52.9.060.0010	93.02.7.060

Screwless terminal - 2 Pole relay

Code	Supply voltage	Type of relay	Type of socket
38.62.7.012.0050	12 V DC	41.52.9.012.0010	93.52.7.024
38.62.7.024.0050	24 V DC	41.52.9.024.0010	93.52.7.024
38.62.7.060.0050	60 V DC	41.52.9.060.0010	93.52.7.060

Combination for Solid State Relay

Screw terminal

Code	Supply voltage	Type of relay	Type of socket
38.81.7.006.xxxx	6 V DC	34.81.7.005.xxxx	93.01.7.024
38.81.7.024.xxxx	24 V DC	34.81.7.024.xxxx	93.01.7.024
38.81.7.060.xxxx	60 V DC	34.81.7.060.xxxx	93.01.7.060
38.81.0.125.xxxx	(110...125)V AC/DC	34.81.7.060.xxxx	93.01.0.125
38.81.0.240.xxxx	(220...240)V AC/DC	34.81.7.060.xxxx	93.01.0.240
38.81.3.125.xxxx	(110...125)V AC/DC	34.81.7.060.xxxx	93.01.3.125
38.81.3.240.xxxx	(230...240)V AC	34.81.7.060.xxxx	93.01.3.240

Screwless terminal

Code	Supply voltage	Type of relay	Type of socket
38.91.7.006.xxxx	6 V DC	34.81.7.005.xxxx	93.51.7.024
38.91.7.024.xxxx	24 V DC	34.81.7.024.xxxx	93.51.7.024
38.91.7.060.xxxx	60 V DC	34.81.7.060.xxxx	93.51.7.060
38.91.0.125.xxxx	(110...125)V AC/DC	34.81.7.060.xxxx	93.51.0.125
38.91.0.240.xxxx	(220...240)V AC/DC	34.81.7.060.xxxx	93.51.0.240
38.91.3.125.xxxx	(110...125)V AC/DC	34.81.7.060.xxxx	93.51.3.125
38.91.3.240.xxxx	(230...240)V AC	34.81.7.060.xxxx	93.51.3.240


Example: .xxxx

.9024

.7048

.8240

Accessories




093.20

Approvals
(according to type):




20-way jumper link for 1 Pole	093.20
Rated values	36 A - 250 V

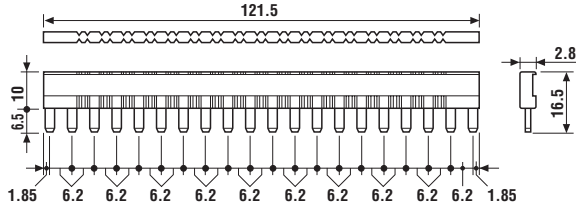

093.08


8-way jumper link for 2 Pole	093.08
Rated values	10 A - 250 V

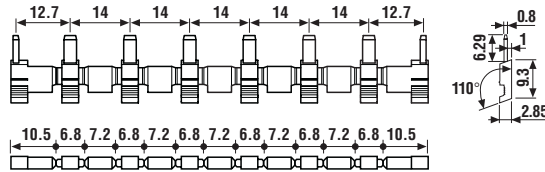

093.01

Plastic separator	093.01
Thickness 2 mm, required at the start and the end of a group of interfaces.	
Can be used for visual separation group, must be used for:	
<ul style="list-style-type: none"> - protective separation of different voltages of neighbouring PLC interfaces according to VDE 0106-101 - protection of cut jumper links 	

38



093.64

Sheet of marker tags for 38.x1, plastic, 64 tags, 6x10 mm	093.64
--	--------



060.72

Sheet of marker tags for 38.x2, plastic, 72 tags, 6x12 mm	060.72
--	--------