



## DPP120 & 240 Series

120W & 240W Single Output DIN Rail Mount Power Supplies

- Low Cost
- 12, 24 or 48V Outputs
- Wide Range AC Input
- Parallel Function Switch
- -40°C to +71°C Operation

### Key Market Segments & Applications

Industrial Controls:	Motor Control Systems
Factory Automation:	Process Control, Automotive,
Test & Measurement:	Chemical Processing
	Burn in & Test,
	Instrumentation Measurement

### DPP120 & 240 Features and Benefits

#### Features

- PFC Compliant to EN61000-3-2
- UL508 Approvals
- TS35/7.5 or TS35/15 DIN Rail Mounting

#### Benefits

- Supports Global Use
- Easier System Configuration
- Easy System Integration

### Specifications

MODELS		DPP120	DPP240
ITEMS			
AC Input Voltage range	VAC	90 - 132/180-264VAC (auto select)	
Input Frequency	Hz	47 - 63Hz	
Inrush Current (115 / 230VAC)	A	24/48A	30/60A
Power Factor	-	typ 0.7 at 230VAC input	
Input Current (115/230VAC)	A	2.2/0.83A	4.0/1.5A
Leakage Current	mA	3.5mA	
Output Voltage	V	12 , 24 or 48V	24 or 48V
Output Voltage Accuracy	%	-0, +1% of Nominal	
Line Regulation	%	±0.5%	
Load Regulation	%	±1% Single Mode ±5% Parallel Mode	
Ripple and Noise (20MHz BW)	mV	<50mV	<100mV
Overcurrent Protection (Typ)	-	120 - 145%	
Overvoltage Protection	V	120 - 145%	
Hold Up Time (230VAC input)	ms	>30 ms	
Efficiency (typ)	%	84 - 90% (see table)	
Parallel Operation (1)	-	Up to 3 units	
LED Indicators	-	Green LED = On, Red LED = DC Output Low	
DC Good Relay (24V model only)		-0.3A rated normally open relay contacts, closes when output is above 17.6 - 19.4V	
Operating Temperature (2)	-	-40°C to +71°C (Derate linearly 2.5% per °C from 61°C to 71°C)	
Storage Temperature	-	-40°C to +85°C	
Operating Humidity	-	20 - 95% RH (non condensing)	
Cooling (3)	-	Convection	
Withstand Voltage	-	Input to Output 3kVAC for 1 min.	
Isolation Resistance	Ω	>100MΩ at 25°C & 70%RH, Output to Ground 500VDC	
Vibration (Operating)		IEC 60068-2-6 (Mounting by rail: Random wave, 10-500 Hz, 2G, ea. along X, Y, Z axes 10 min/cycle, 60 min)	
Shock (Operating)		IEC 60068-2-27 (Half sine wave, 4G, 22ms, 3 axes, 6 Faces, 3 times for each face)	
Safety Agency Approvals	-	UL508 Listed, IEC/UL/CSA/EN62368-1, 60950-1, CE Mark	
Conducted & Radiated EMI	-	EN55022 class B	
Weight (Typ)	g	920	1000
Size (HxWxD)	mm	125 x 63.5 x 123.6	125 x 83 x 126
Case material	-	Metal	
Warranty	yrs	3	

- Notes:** (1) For parallel operations a minimum 10% load is required - loading conditions 0.1Io min to 0.9Io max  
 (2) DPP120 -35°C  
 (3) Recommend 1° clearance on all sides


<b>Model Selector</b>					
<b>Model</b>	<b>Voltage (V)</b>	<b>Voltage Adjust (V)</b>	<b>Current (A)</b>	<b>Power (W)</b>	<b>Effic. (typ) %</b>
DPP120-12	12	11.4 - 14.5	10	120	84
DPP120-24	24	22.5 - 28.5	5	120	86
DPP120-48	48	45 - 55	2.5	120	87
DPP240-24	24	22.5 - 28.5	10	240	89
DPP240-48	48	47 - 56	5	240	90

For plug type connectors add suffix 'B' to part number


<b>PIN Assignments</b>	
<b>Pin#</b>	<b>Function</b>
1	DC Good Relay
2	DC Good Relay
3	V+
4	V+
5	V-
6	V-
7	GND
8	L
9	N

<b>Options</b>	
<b>Suffix</b>	<b>Description</b>
Blank	Non detachable connector
B	Detachable input & output connector

## Outline Drawing DPP120

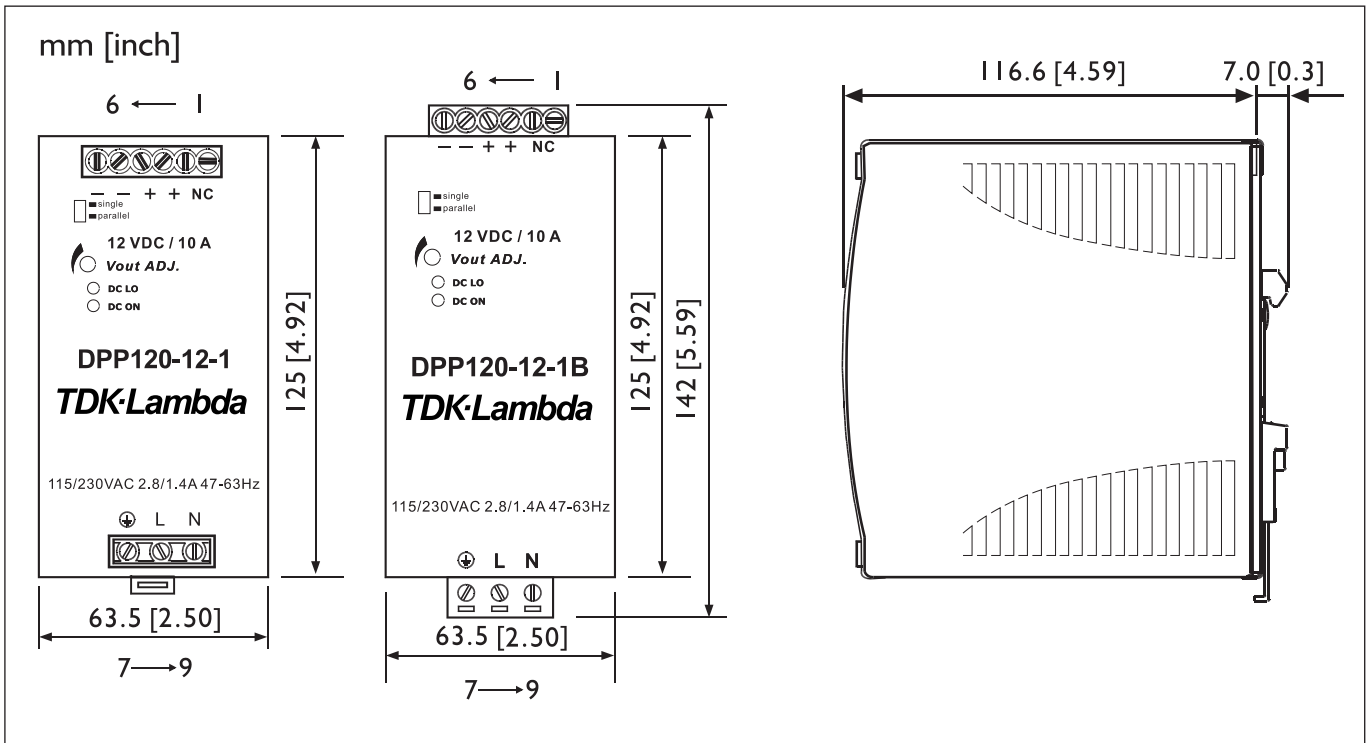

## Outline Drawing DPP240

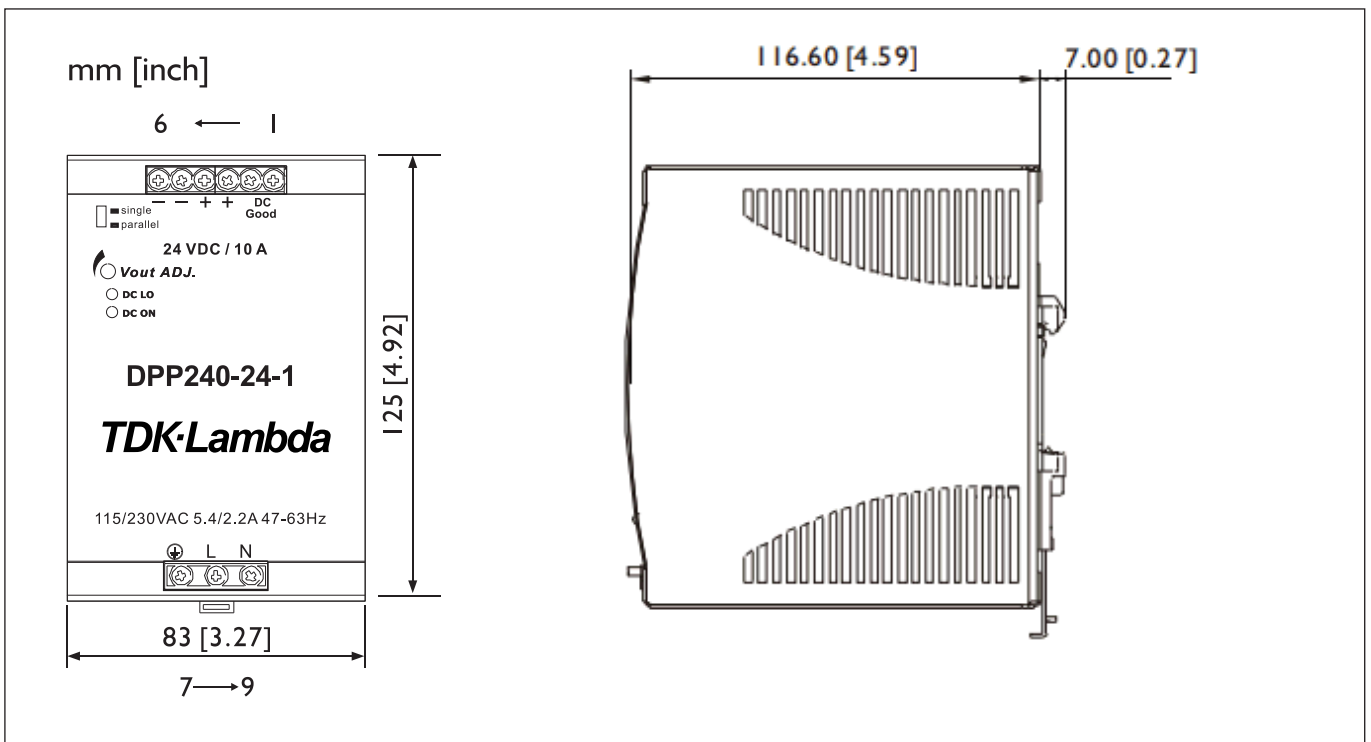



### TDK-Lambda France SAS

Tel: +33 1 60 12 71 65  
 tlf.fr-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/fr



### Italy Sales Office

Tel: +39 02 61 29 38 63  
 tlf.it-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/it



### Netherlands

tlf.nl-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/nl



### TDK-Lambda Germany GmbH

Tel: +49 7841 666 0  
 tlq.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/de



### Austria Sales Office

Tel: +43 2256 655 84  
 tlq.at-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/at



### Switzerland Sales Office

Tel: +41 44 850 53 53  
 tlq.ch-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/ch



### Nordic Sales Office

Tel: +45 8853 8086  
 tlq.dk-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/dk



### TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66  
 tlu.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/uk



### TDK-Lambda Ltd.

Tel: +9 723 902 4333  
 tli.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/il-en



### TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324  
 tla.powersolutions@tdk.com  
 www.us.lambda.tdk.com



### TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599  
 sales.br@tdk-electronics.tdk.com  
 www.tdk-electronics.tdk.com/en



### TDK-Lambda Corporation

Tel: +81-3-6778-1113  
 www.jp.lambda.tdk.com



### TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777  
 tlc.powersolutions@tdk.com  
 www.lambda.tdk.com.cn



### TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211  
 tfs.marketing@tdk.com  
 www.sg.lambda.tdk.com



### TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660  
 mathew.philip@tdk.com  
 www.sg.lambda.tdk.com

