

10.16mm PCB Terminal Block


multicompPRO



Specifications

Rating Current	: 65A, 300V AC
Min. Insulation withstand Voltage	: 2,000V AC
Insulation Resistance	: >2,000MΩ 500V DC
Operating Temperature	: -40°C to +105°C
Wire Range	: 26 to 6 AWG
Screw Torque	: 20.5 lb-inch
PCB Mounting Hole Dia.	: Ø1.6mm
Pitch	: 10.16mm (0.4")

Diagram

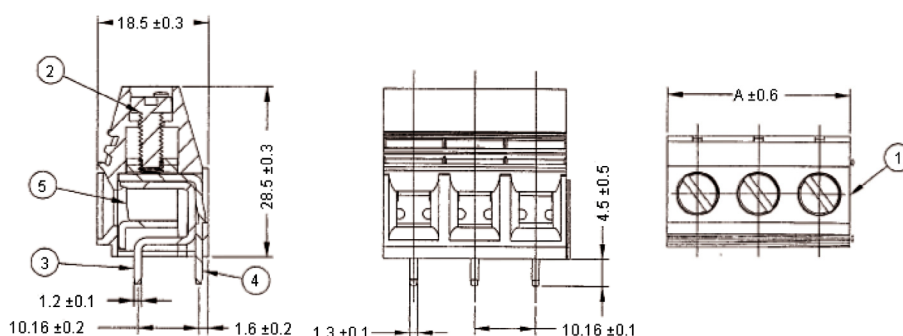

Dimensions : Millimetres (Inches)

Specification Table

No	Material		Plating / Finish	Remark
1	Insulating body	Polyamide 66	-	Grey
2	Screw	Steel	Zinc + Cr ⁺³	M4
3	Terminal	Copper	Tin plated	-
4				-
5	Cage Clamp	Steel	Zinc + Cr ⁺³	-

Part Number Table

Description	A mm (Inches)	Part Number
PCB Terminal Block 10.16mm, Screw, 2 Way	20.32 (0.8)	MC000232
PCB Terminal Block 10.16mm, Screw, 3 Way	30.48 (1.2)	MC000233

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO