



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/17/15	D.GRIFFIN

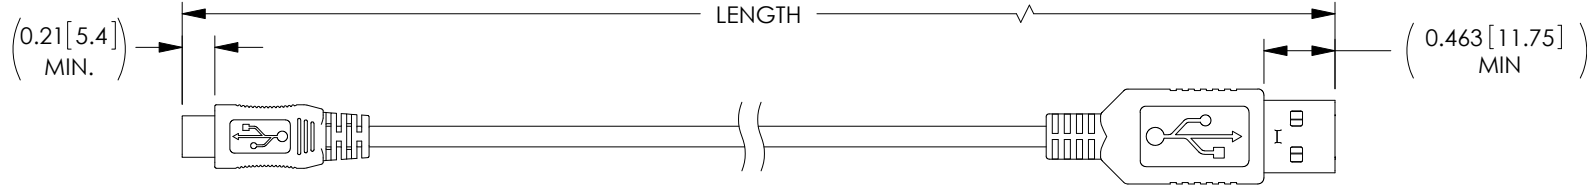


"P1"
5-PIN MICRO B PLUG
CONTACTS: 30 μINCHES
GOLD PLATING

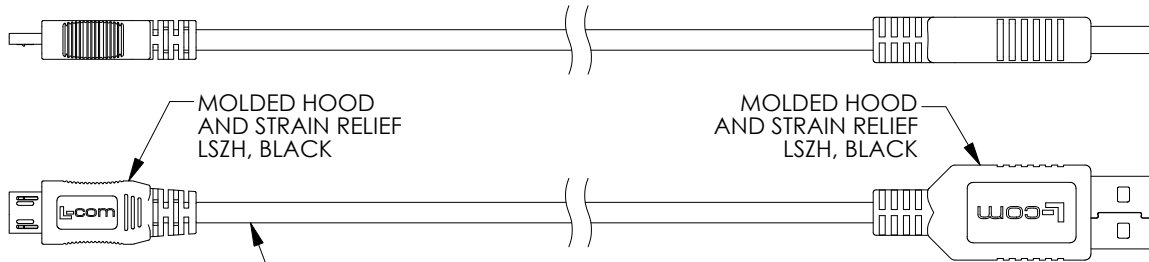

PIN 1
DIELECTRIC
"P2"
SERIES "A" PLUG
CONTACTS: 30 μINCHES
GOLD PLATING

MODEL NUMBER	LENGTH METERS [FEET]
CSMUAZMICB-03M	0.3 [.98]
CSMUAZMICB-05M	0.5 [1.64]
CSMUAZMICB-1M	1.0 [3.28]
CSMUAZMICB-2M	2.0 [6.56]
CSMUAZMICB-3M	3.0 [9.84]

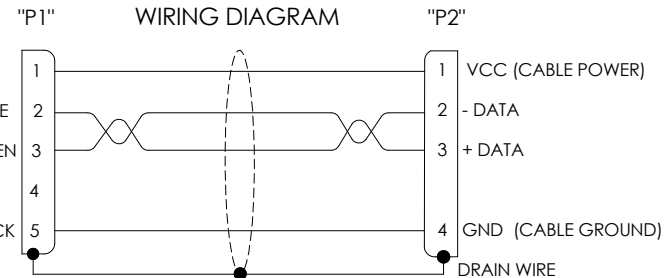

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [13] PROJECTION 	APPROVALS DRAWN BY D. DESJARDIN CHECKED BY S. SMITH APPROVED BY S. SMITH	DATE 9/17/15 11/17/15 11/17/15	L-com Global Connectivity 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY USB	
	COLOR VARIATIONS MAY OCCUR		PRODUCT DESCRIPTION CA USB-A/MICRO B LSZH	
	SIZE A	FSCM NO. 43321	DWG. NO. CSMUAZMICB	REV. A
SCALE: NONE		CAD FILE: CSMUAZMICB.SLDDRW		SHEET 1 OF 1