

- High power density in low profile case, module depth < 55 mm
- Suitable for mounting in domestic installation panels
- Very high efficiency and low standby power -> compliance to ECO-Standard
- Low output ripples and spikes
- Suitable for household appliance and industrial application
- For distributed power
- Operating temperature range: -25°C to +70°C
- UL 508 listed
- UL 1310 class II, NEC class 2 compliance
- 3-year product warranty



This new DIN-Rail mounting power supplies are designed for industrial and residential applications. They are lower cost than the existing TBL range, with similar electrical specifications. Additionally, they fully comply to the new standby power and efficiency requirements (ECO Standard). They are intended for connecting as class II devices, so the safety earth connection is not required. They are mountable in flat racks due to their small dimensions in depth. Their dimensions comply to the DIN 43880 standard.

Models

Order Code	Output Power max.	Output Voltage nom. (adjustable)	Output Current max.	Efficiency typ.
TBLC 06-105	6 W	5 VDC (5.0 - 5.5 VDC)	1'200 mA	74 %
TBLC 06-112		12 VDC (12.0 - 16.0 VDC)	500 mA	81 %
TBLC 06-124		24 VDC (24.0 - 28.0 VDC)	250 mA	79 %

Input Specifications

Input Voltage	Operational Range: 85 - 264 VAC (Full Range) Rated Range: 100 - 240 VAC (Full Range)
Input Frequency	Operational Range: 47 - 63 Hz Certified: 50/60 Hz
Power Consumption	- No load & $V_{in} = 230$ VAC - No load & $V_{in} = 115$ VAC 300 mW max. (Ready to meet ErP directive) 300 mW max.
Input Inrush Current	- At 230 VAC - At 115 VAC 30 A max. 15 A max.
Recommended Input Fuse	(The need of an external fuse has to be assessed in the final application.)

Output Specifications

Output Voltage Adjustment	5 VDC model: 5.0 - 5.5 VDC 12 VDC model: 12.0 - 16.0 VDC 24 VDC model: 24.0 - 28.0 VDC (By trim potentiometer) Output power must not exceed rated power!
Voltage Set Accuracy	±1% max.
Regulation	- Input Variation ($V_{min} - V_{max}$) - Load Variation (10 - 90%) 0.3% max. 0.3% max.
Ripple and Noise (20 MHz Bandwidth)	50 mVp-p max.
Minimum Load	Not required
Temperature Coefficient	±0.02 %/K max.
Hold-up Time	- At 230 VAC - At 115 VAC 60 ms min. 15 ms min.
Start-up Time	- At 230 VAC - At 115 VAC 1'000 ms max. 1'000 ms max.
Short Circuit Protection	Continuous, Automatic recovery
Output Current Limitation	105 - 130% of I_{out} max.
Overvoltage Protection	125 - 150% of V_{out} nom.
Transient Response	- Peak Variation - Response Time 500 mV max. (10% to 90% Load Step) 4'000 μs typ. (10% to 90% Load Step)

Safety Specifications

Safety Standards	- IT / Multimedia Equipment - Industrial Control Equipment - Household - Machines Equipment - Power Installation - Measurement, Control & Lab. - Power Transformers - Converter System - Certification Documents	EN 60950-1 IEC 60950-1 UL 60950-1 UL 508 EN 60335-1 IEC 60335-1 EN 60204 EN 50178 EN 61010-1 EN 61010-2-201 IEC 61010-1 IEC 61010-2-201 EN 61558-2-8 EN 61558-2-16 EN 62477 IEC 62477 www.tracopower.com/overview/tb1c06
Protection Class	Class I & II (Prepared): Reinforced Insulation	

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Class 2 Power Units	UL 1310 NEC Class 2
Pollution Degree	PD 2
Over Voltage Category	OVC II

EMC Specifications

EMI Emissions	EN 61000-6-3 (Generic Residential) EN 61204-3 (Low Voltage Power Supplies) EN 55011 class B (internal filter) EN 55032 class B (internal filter) EN 55011 class B (internal filter) EN 55032 class B (internal filter) EN 61000-3-2, class A
- Conducted Emissions	
- Radiated Emissions	
- Harmonic Current Emissions	
EMS Immunity	EN 61000-6-2 (Generic Industrial) EN 61204-3 (Low Voltage Power Supplies)
- Electrostatic Discharge	Air: EN 61000-4-2, ± 8 kV, perf. criteria B Contact: EN 61000-4-2, ± 4 kV, perf. criteria B EN 61000-4-3, 10 V/m, perf. criteria A EN 61000-4-4, ± 2 kV, perf. criteria B
- RF Electromagnetic Field	L to L: EN 61000-4-5, ± 1 kV, perf. criteria B L to PE: EN 61000-4-5, ± 2 kV, perf. criteria B
- EFT (Burst) / Surge	EN 61000-4-6, 10 Vrms, perf. criteria A Continuous: EN 61000-4-8, 30 A/m, perf. criteria A 230 VAC / 50 Hz: EN 61000-4-11 30%, 25 periods, perf. criteria A 60%, 10 periods, perf. criteria B >95%, 1 period, perf. criteria A
- Conducted RF Disturbances	115 VAC / 60 Hz: EN 61000-4-11 30%, 25 periods, perf. criteria B 60%, 10 periods, perf. criteria B >95%, 1 period, perf. criteria B
- PF Magnetic Field	
- Voltage Dips & Interruptions	SEMI F47, criteria A
- Voltage Sag Immunity	

General Specifications

Relative Humidity	95% max. (non condensing)
Temperature Ranges	- Operating Temperature - Case Temperature - Storage Temperature -25°C to +70°C +70°C max. -40°C to +85°C
Power Derating	- High Temperature - Low Input Voltage 2.5 %/K above 55°C 2 %/V below 100 VAC
Cooling System	Natural convection (20 LFM)
Altitude During Operation	5'000 m max. (Lower altitude required for IEC61558-1 & 60335 of 3000 m)
Switching Frequency	59 - 71 kHz (PWM)
Insulation System	Reinforced Insulation
Isolation Test Voltage	- Input to Output, 60 s 3'000 VAC
Creepage	- Input to Output 7.4 mm min.
Clearance	- Input to Output 6.6 mm min.
Leakage Current	- Touch Current 250 μ A max.
Reliability	- Calculated MTBF 1'900'000 h (IEC 61709)
Environment	- Vibration IEC 60068-2-6 2 g, 3 axis, sine sweep, 3x60 min, 10-150 Hz - Mechanical Shock IEC 60068-2-27 30 g, 3 axis, half sine, 11 ms
Case Ingress Protection	IP 20 (acc. IEC 60529)
Housing Material	Plastic (UL 94 V-2 rated)
Housing Type	Plastic Case

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.


Mounting Type	DIN-Rail Mount (EN 60715 - 35x7.5mm/35x15mm)
Connection Type	Screw Terminal
Weight	60 g
Thermal Impedance	- Case to Ambient 4.8 K/W typ.
Status Indicator	Indicated by green LED
Environmental Compliance	- REACH Declaration www.tracopower.com/info/reach-declaration.pdf REACH SVHC list compliant REACH Annex XVII compliant www.tracopower.com/info/rohs-declaration.pdf Exemptions: 7a, 7c-I (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule). The SCIP number is provided on request.)
	- RoHS Declaration

Supporting Documents

Overview Link (for additional Documents)

www.tracopower.com/overview/tbhc06

Outline Dimensions

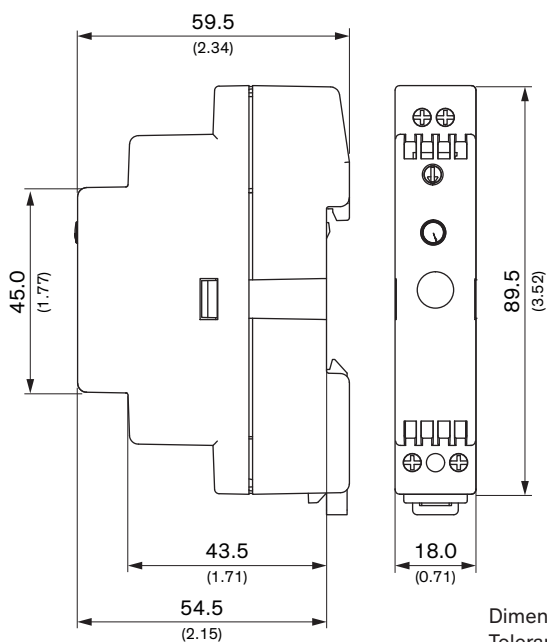

Wiring		
Description	Wire size	Torque
AC Input all models: L, N only (2 pin terminal)	AWG 20 - 14 0.5 - 2.5 mm ² max.	0.5 Nm
DC Output single terminal	AWG 20 - 14 0.5 - 2.5 mm ² max.	0.5 Nm