


2x2 4G/LTE Screw Mount MIMO Antenna



AEACBK081014-M698



Ø81.6 x 14.5 mm
RoHS/RoHS II Compliant
MSL - 1

FEATURES

- 2 X MIMO antenna
- 4G/LTE operates in 698-2700 MHz
- IP67 rated
- Linear polarization
- Screw mounting

APPLICATIONS

- 4G/LTE
- Telematics
- Fleet monitoring
- IoT
- Video, Surveillance
- Femtocells
- M2M

Electrical Specifications

Parameters	Min.	Typ.	Max.	Units	Note
Frequency Range		698~960/1710~2690		MHz	
VSWR			3.0		
Polarization Model	Linear				
Impedance		50		Ω	
Gain Main		2.5		dBi	Zenith
Gain AUX		2.0		dBi	Zenith

Mechanical Characteristics

Parameters	Description
Connector	2xSMA Male
Cable Type	2xRG174
Cable Length	3M
Material	ABS
Mount way	Screw
Dimensions	Φ81.3 x 14.6 mm

Environmental Characteristics

Parameters	Description
Waterproof	IP67
Operating Temperature	-40° to +85°C
Relative Humidity	Up to 95%
MSL Level	1
ROHS Complaint	Yes
Vibration	10 to 55Hz with 1.5mm amplitude 2hours




5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 10.09.2018

ABRACON IS
ISO9001-2015
CERTIFIED

2x2 4G/LTE Screw Mount MIMO Antenna

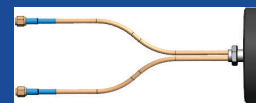


AEACBK081014-M698



Ø81.6 x 14.5 mm
RoHS/RoHS II Compliant
MSL - 1


Dimensions

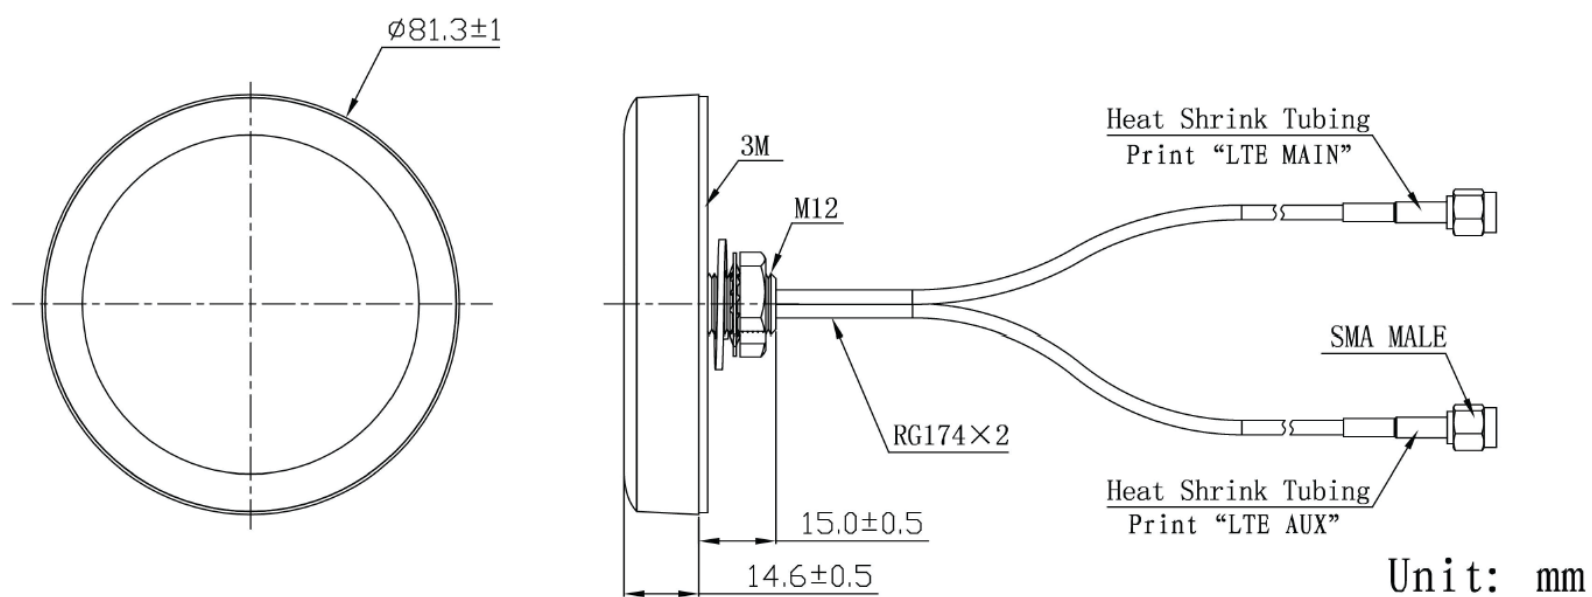

Product Image



2x2 4G/LTE Screw Mount MIMO Antenna






AEACBK081014-M698



Ø81.6 x 14.5 mm
RoHS/RoHS II Compliant
MSL - 1

Radiation Patterns

LTE Antenna MAIN

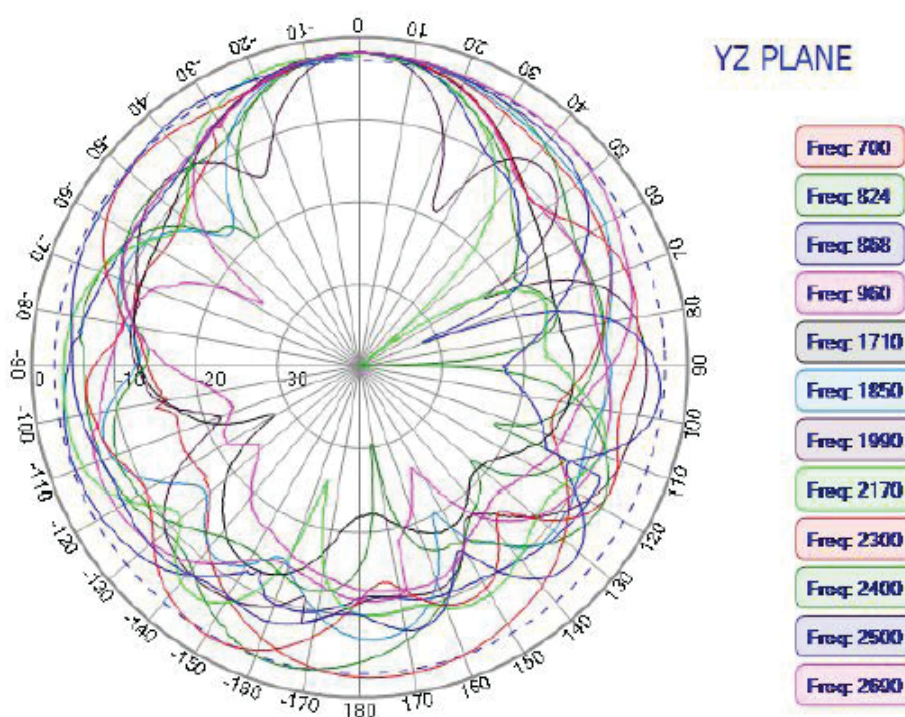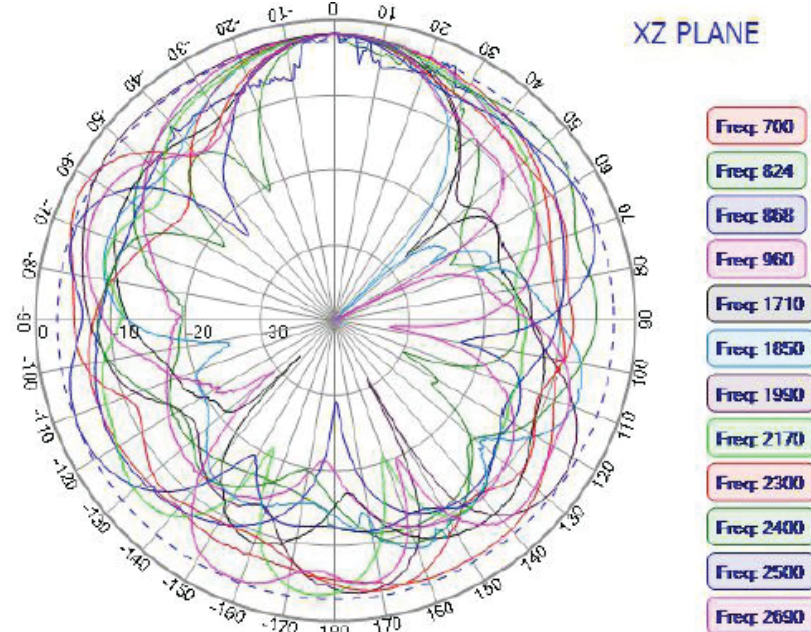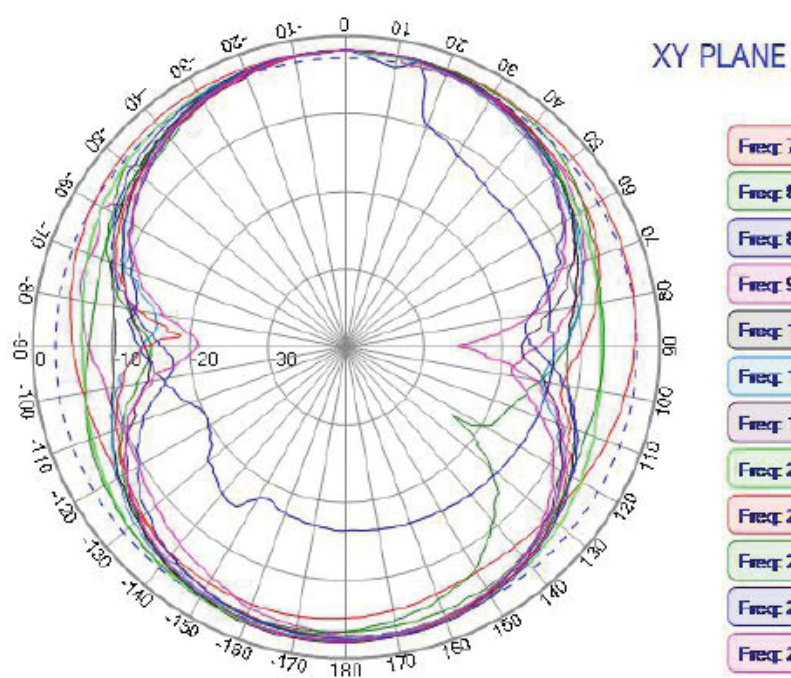


5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 10.09.2018

ABRACON IS
ISO9001-2015
CERTIFIED

2x2 4G/LTE Screw Mount MIMO Antenna




AEACBK081014-M698



Ø81.6 x 14.5 mm
RoHS/RoHS II Compliant
MSL - 1

Radiation Patterns

LTE Antenna AUX

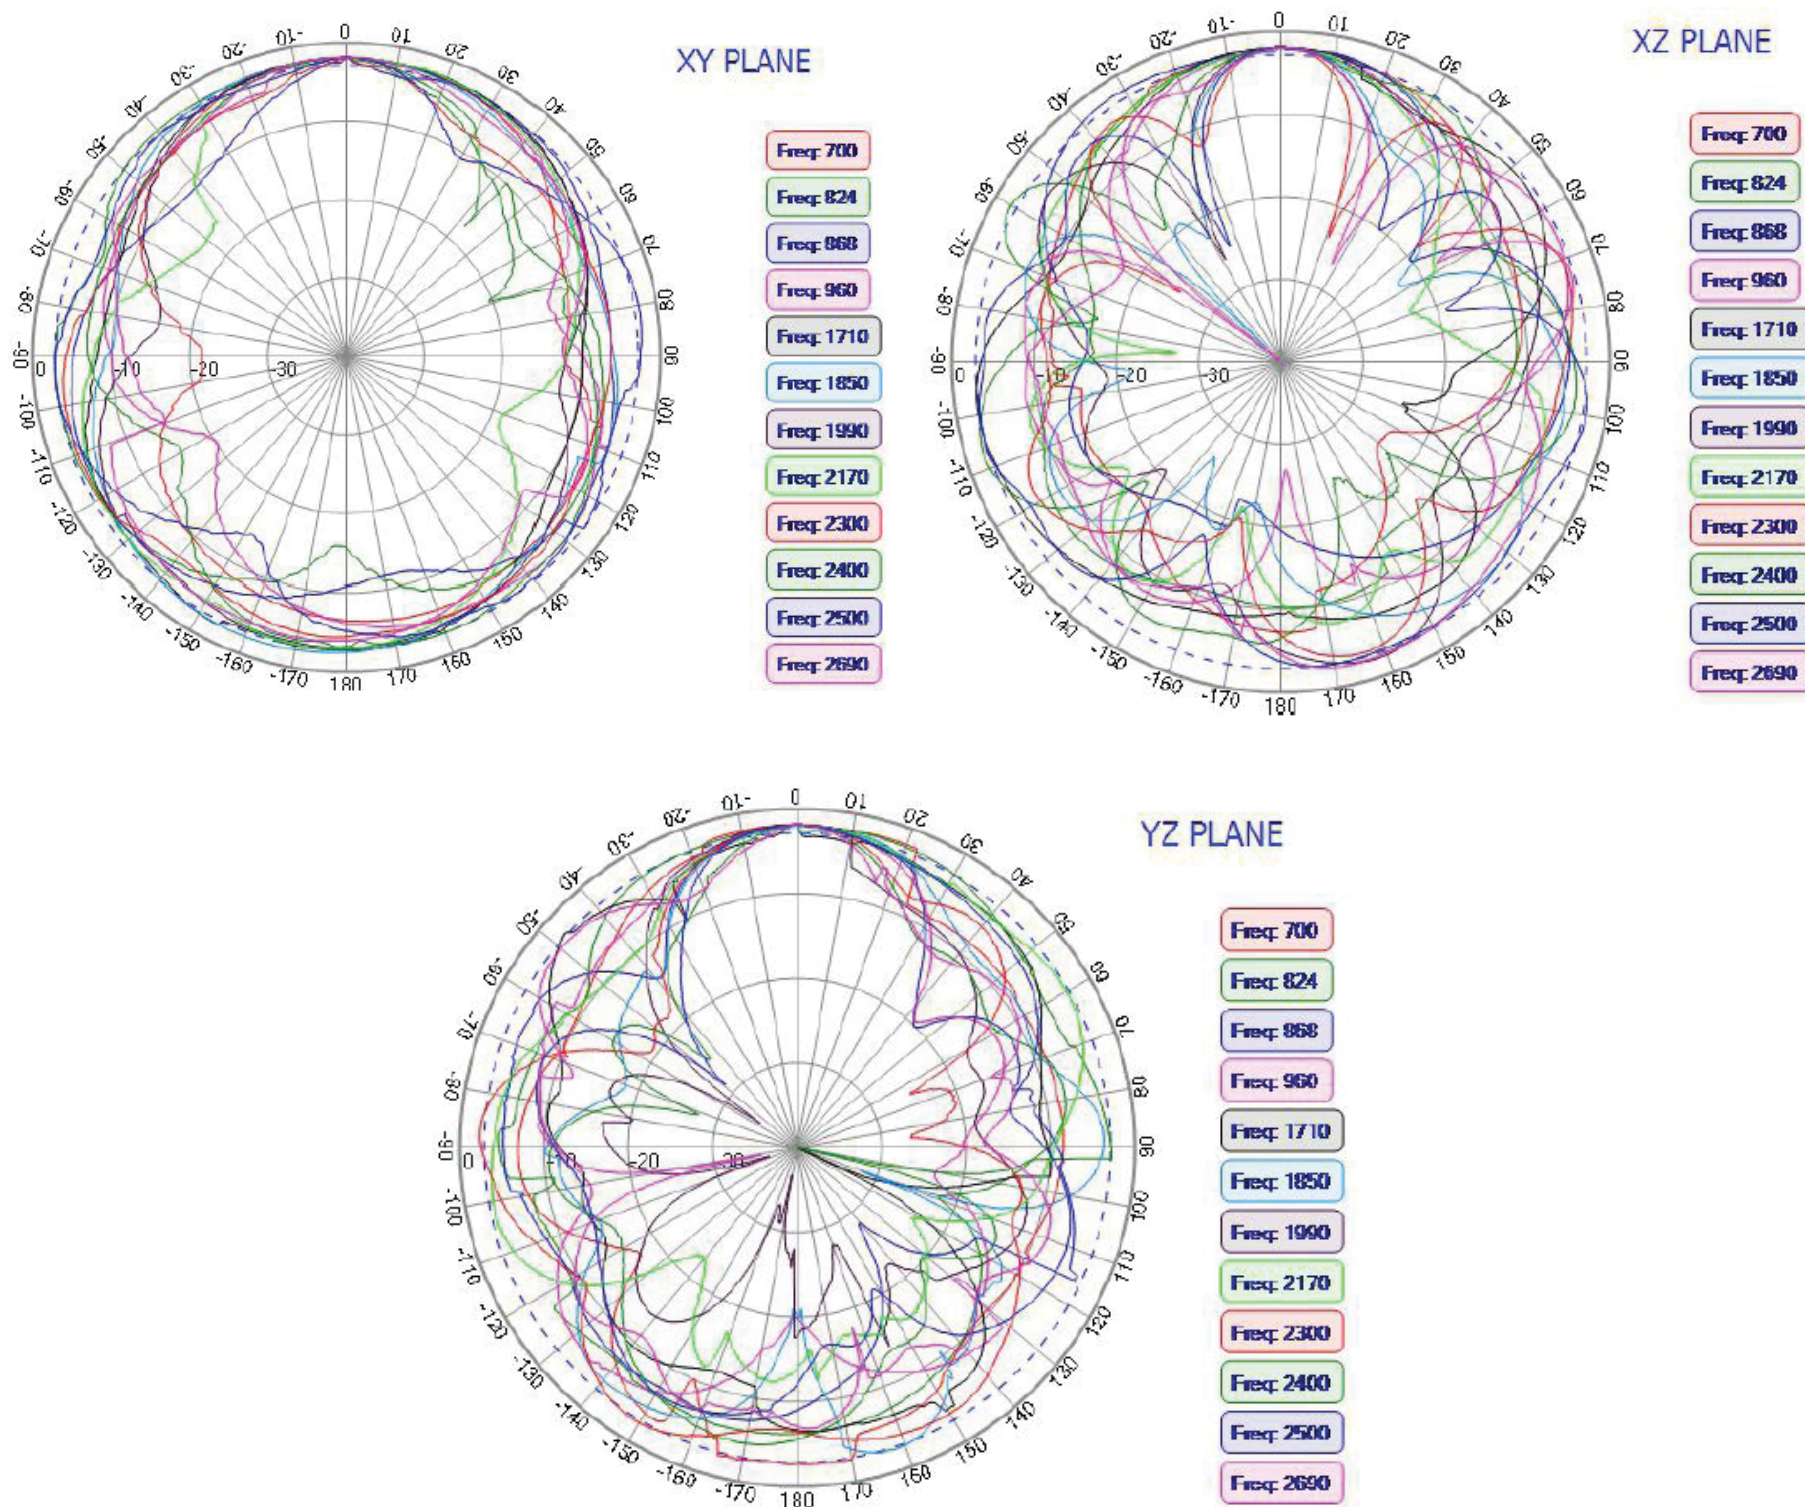

Packaging

Each 49.5 x 22.5 x 27 cm size carton includes 50 pcs antenna, weighs 7.5 kg.



5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 10.09.2018

ABRACON IS
ISO9001-2015
CERTIFIED