



Main

| | |
|---------------------------|----------------------|
| Range of product | Zelio Time |
| Product or component type | Modular timing relay |
| Discrete output type | Relay |
| Device short name | RE22 |
| Nominal output current | 8 A |

Complementary

| | |
|--------------------------------|--|
| Contacts type and composition | 1 C/O timed contact, cadmium free |
| Time delay type | Dw D |
| Time delay range | 0.05...1 s 30...300 h 30...300 min 30...300 s 3...30 min 1...10 s 3...30 s 0.3...3 s 10...100 s 3...30 h |
| Control type | Rotary knob Diagnostic button |
| [Us] rated supply voltage | 24...240 V AC/DC 50/60 Hz |
| Release input voltage | ≤ 2.4 V |
| Voltage range | 0.85...1.1 Us |
| Supply frequency | 50...60 Hz +/- 5 % |
| Connections - terminals | Screw terminals, 1 x 0.5...1 x 3.3 mm ² AWG 20...AWG 12) solid without cable end Screw terminals, 2 x 0.5...2 x 2.5 mm ² AWG 20...AWG 14) solid without cable end Screw terminals, 1 x 0.2...1 x 2.5 mm ² AWG 24...AWG 14) flexible with cable end Screw terminals, 2 x 0.2...2 x 1.5 mm ² AWG 24...AWG 16) flexible with cable end |
| Tightening torque | 5.31...8.85 lbf.in (0.6...1 N.m) IEC 60947-1 |
| Housing material | Self-extinguishing |
| Repeat accuracy | +/- 0.5 % IEC 61812-1 |
| Temperature drift | +/- 0.05 %/°C |
| Voltage drift | +/- 0.2 %/V |
| Setting accuracy of time delay | +/- 10 % of full scale 25 °C IEC 61812-1 |
| Control signal pulse width | 100 Ms with load in parallel 30 ms |
| Insulation resistance | 100 MOhm 500 V DC IEC 60664-1 |
| Recovery time | 120 ms on de-energisation |
| Immunity to microbreaks | 10 ms |
| Power consumption in VA | 3 VA 240 V AC |
| Power consumption in W | 1.5 W 240 V DC |
| Switching capacity in VA | 2000 VA |

| | |
|---------------------------------|---|
| Minimum switching current | 10 mA 5 V DC |
| Maximum switching current | 8 A |
| Maximum switching voltage | 250 V AC |
| Electrical durability | 100000 Cycles, 8 A 250 V, AC-1 100000 cycles, 2 A 24 V, DC-1 |
| Mechanical durability | 10000000 cycles |
| Rated impulse withstand voltage | 5 kV 1.2...50 µs IEC 60664-1 |
| Power on delay | 100 ms |
| Creepage distance | 4 kV/3 IEC 60664-1 |
| Overvoltage category | III IEC 60664-1 |
| Safety reliability data | B10d = 280000 MTTFd = 308.2 years |
| Mounting position | Any position |
| Mounting support | 35 mm DIN rail EN/IEC 60715 |
| Status LED | Green LED backlight steady)dial pointer indication Yellow LED steady)output relay energised Yellow LED fast flashing)timing in progress and output relay de-energised Yellow LED slow flashing)timing in progress and output relay energised |
| Maximum Width | 0.89 in (22.5 mm) |
| Net Weight | 0.22 lb(US) (0.1 kg) |

Environment

| | |
|---------------------------------------|--|
| Dielectric strength | 2.5 kV 1 mA/1 minute 50 Hz between relay output and power supply basic insulation IEC 61812-1 |
| Standards | UL 508 IEC 61812-1 |
| Directives | 2004/108/EC - electromagnetic compatibility 2006/95/EC - low voltage directive |
| Product certifications | GL EAC UL CCC CSA CE RCM |
| Ambient air temperature for operation | -4...140 °F (-20...60 °C) |
| Ambient air temperature for storage | -40...158 °F (-40...70 °C) |
| IP degree of protection | Housing IP40 IEC 60529 Front face IP50 IEC 60529 Terminals IP20 IEC 60529 |
| Pollution degree | 3 conforming to IEC 60664-1 |
| Vibration resistance | 20 m/s ² 10...150 Hz)IEC 60068-2-6 |
| Shock resistance | 15 gn not operating 11 ms IEC 60068-2-27 5 gn in operation 11 ms IEC 60068-2-27 |
| Relative humidity | 95 % 77...131 °F (25...55 °C) |
| Electromagnetic compatibility | Fast transients immunity test 1 kV capacitive connecting clip)level 3 IEC 61000-4-4 Surge immunity test - test level: 1 kV level 3 (differential mode) conforming to IEC 61000-4-5 Surge immunity test - test level: 2 kV level 3 (common mode) conforming to IEC 61000-4-5 Electrostatic discharge - test level: 6 kV level 3 (contact discharge) conforming to IEC 61000-4-2 Electrostatic discharge - test level: 8 kV level 3 (air discharge) conforming to IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test 10 V/m 80 MHz...1 GHz)level 3 IEC 61000-4-3 Conducted RF disturbances 10 V 0.15...80 MHz)level 3 IEC 61000-4-6 Fast transient bursts 2 kV direct contact)level 3 IEC 61000-4-4 Immunity to microbreaks and voltage drops 30 % 500 ms) IEC 61000-4-11 Immunity to microbreaks and voltage drops 100 % 20 ms) IEC 61000-4-11 |

Ordering and shipping details

| | |
|-----------------------|---------------------------------|
| Category | 22376 - RELAYS-MEASUREMENT(RM4) |
| Discount Schedule | CP2 |
| GTIN | 00785901500995 |
| Nbr. of units in pkg. | 1 |
| Package weight(Lbs) | 0.2 lb(US) (0.09 kg) |
| Returnability | No |
| Country of origin | ID |


Packing Units

| | |
|------------------|----------|
| Package 1 Height | 0.260 dm |
| Package 1 width | 0.820 dm |
| Package 1 Length | 0.950 dm |


Offer Sustainability

| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| California proposition 65 | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS Declaration |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End Of Life Information |

Dimensions

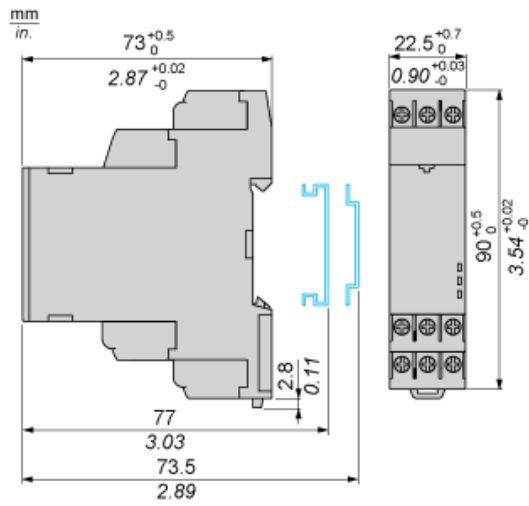

Wiring Diagram

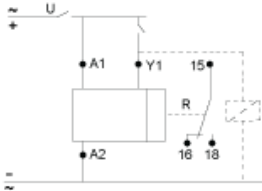

Function D: Symmetrical Flashing Relay (Starting Pulse Off)


Description

On energisation of power supply, output(s) R starts at its/their initial state for timing duration T then change(s) to output(s) R close(s) for the same timing duration T. This cycle is repeated indefinitely until power supply removal. Specially for RE17*, RE22R2AMU, RE22R2MMW, RE22R2MMU, RE22R2MJU, this D function can only be initiated by energizing Y1 permanently. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Function: 1 Output




Function: 2 Outputs

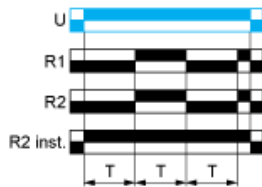

Function: 1 Output with Retrigger / Restart Control



Function: 2 Output with Retrigger / Restart Control

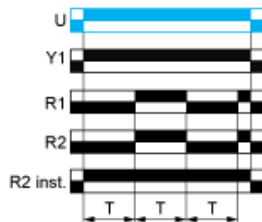

Function DW: Symmetrical Flashing Relay (Starting Pulse Off) & With Retrigger / Restart Control


Description

On energisation of power supply, output(s) R starts at its/their initial state for timing duration T then change(s) to output(s) R close(s) for the same timing duration T. This cycle is repeated indefinitely until power supply removal. Specially for RE17*, RE22R2AMU, RE22R2MMW, RE22R2MMU, RE22R2MJU, this D function can only be initiated by energizing Y1 permanently. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function: 1 Output



Function: 2 Outputs

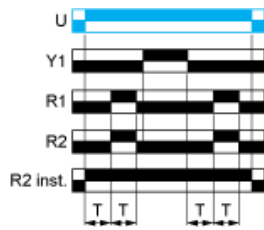

Legend

□ Relay de-energised

■ Relay energised

□ Output open

■ Output closed

U Supply

-

T - Timing period

R1/
R2 2 timed outputs

-

R2 inst. The second output is instantaneous if the right position is selected

-

Y1 Retrigger / Restart control

-