

SMD High Current Ceramic Micro Fuse

multicompPRO

**RoHS
Compliant**

Application

Use in power tool battery packs

Specification

Current Rating	: 60A & 80A
Voltage Rating	: 80V DC
Interrupting Current rating	: 450 Amperes at 80V DC 600 Amperes at 35V DC 600 Amperes at 65V DC
Fuse Body Material	: Ceramic
Termination Material	: Copper (Cu), Tin (Sn)
Fuse Element	: Copper (Cu), Tin (Sn)
Operating Temperature	: -55°C to +125°C
Fuse Size	: 7.3mm × 5.8mm × 4mm



Electrical Characteristics

Rating	100% Rating		250% Rating	
	Min.	Max.	Min.	Max.
60A to 80A	4hr	-	-	60 sec


Part Number	Ampere Rating (A)	Voltage Rating (V)	Nominal Cold Resistance (Ohms)	Nominal Melting I ² t (A ² sec.)
MP000816	60	80	0.00065	1260
MP000817	80		0.00055	3110

* Measured at ≤ 10% of rated current at 25°C

* 60A: Melting I²t at 1000% of current rating


* 80A: Melting I²t at 600% of current rating

Mechanical Dimensions

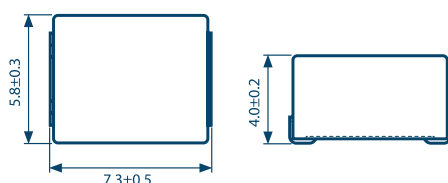

Dimensions : Millimetres

Recommended Land Pattern



Part Number Table

Description	Part Number
SMD Fuse, 60A, 80V DC	MP000816
SMD Fuse, 80A, 80V DC	MP000817

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/exclusive-brands
Farnell.com/exclusive-brands
Element14.com/exclusive-brands

multicompPRO