



circuit breaker 3VA2 IEC Frame 160 breaking capacity class L Icu=150 kA @ 415 V 3-pole, line protection ETU860, LSIG, In=25 A overload protection Ir=10 A...25 A short-circuit protection Isd=0.6..10x In, li=1.5..12x In neutral conductor protection optionally with external current transformer, up to 160% ground-fault protection, can be switched off Ig=0.2...1 x In, tg=0.05-0.8s terminal connection

| Model                                                                                                 |                                         |
|-------------------------------------------------------------------------------------------------------|-----------------------------------------|
| product brand name                                                                                    | SENTRON                                 |
| product designation                                                                                   | Molded case circuit breaker             |
| design of the product                                                                                 | Line protection                         |
| design of the overcurrent release                                                                     | ETU860                                  |
| protection function of the overcurrent release                                                        | LSIG                                    |
| number of poles                                                                                       | 3                                       |
| General technical data                                                                                |                                         |
| insulation voltage / rated value                                                                      | 800 V                                   |
| operating voltage / at AC / rated value                                                               | 690 V                                   |
| power loss [W] / maximum                                                                              | 0.5 W                                   |
| power loss [W] / for rated value of the current / at AC / in hot operating state / per pole           | 0.17 W                                  |
| mechanical service life (operating cycles) / typical                                                  | 25 000                                  |
| electrical endurance (operating cycles) / at AC-1 / at 380/415 V                                      | 14 000                                  |
| electrical endurance (operating cycles) / at AC-1 / at 690 V                                          | 9 800                                   |
| product feature / for neutral conductors / upgradable/retrofitable / short-circuit and overload proof | Yes                                     |
| ground-fault monitoring version                                                                       | Summation current formation L-conductor |
| product function                                                                                      |                                         |
| • communication function                                                                              | Yes                                     |
| • other measurement function                                                                          | Yes                                     |
| Net Weight                                                                                            | 2.5 kg                                  |
| Current                                                                                               |                                         |
| operational current                                                                                   |                                         |
| • at 40 °C                                                                                            | 25 A                                    |
| • at 45 °C                                                                                            | 25 A                                    |
| • at 50 °C                                                                                            | 25 A                                    |
| • at 55 °C                                                                                            | 25 A                                    |
| • at 60 °C                                                                                            | 25 A                                    |
| • at 65 °C                                                                                            | 25 A                                    |
| • at 70 °C                                                                                            | 25 A                                    |
| Switching capacity according to IEC 60947                                                             |                                         |
| switching capacity class of the circuit breaker                                                       | L                                       |
| maximum short-circuit current breaking capacity (Icu)                                                 |                                         |
| • at 240 V                                                                                            | 200 kA                                  |

|                                                                                                                                              |                                                 |
|----------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|
| <ul style="list-style-type: none"> <li>• at 415 V</li> <li>• at 440 V</li> <li>• at 500 V</li> <li>• at 690 V</li> </ul>                     | 150 kA<br>150 kA<br>100 kA<br>25 kA             |
| operating short-circuit current breaking capacity (Ics)                                                                                      |                                                 |
| <ul style="list-style-type: none"> <li>• at 240 V</li> <li>• at 415 V</li> <li>• at 440 V</li> <li>• at 500 V</li> <li>• at 690 V</li> </ul> | 200 kA<br>150 kA<br>150 kA<br>100 kA<br>18 kA   |
| short-circuit current making capacity (Icm)                                                                                                  |                                                 |
| <ul style="list-style-type: none"> <li>• at 240 V</li> <li>• at 415 V</li> <li>• at 440 V</li> <li>• at 500 V</li> <li>• at 690 V</li> </ul> | 440 kA<br>330 kA<br>330 kA<br>220 kA<br>52.5 kA |

#### Adjustable parameters

|                                                                                                                    |                 |
|--------------------------------------------------------------------------------------------------------------------|-----------------|
| product feature / for L-tripping / can be switched on/off                                                          | No              |
| adjustable response value setting current (I <sub>r</sub> ) / of the L-trip / with I <sub>2t</sub> characteristic  |                 |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                                     | 10 A<br>25 A    |
| adjustable response value delay time (t <sub>r</sub> ) / for L-tripping / with I <sub>2t</sub> characteristic      |                 |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                                     | 0.5 s<br>25 s   |
| adjustable response value setting current (I <sub>sd</sub> ) / of S-trip / with I <sub>0t</sub> characteristic     |                 |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                                     | 15 A<br>250 A   |
| adjustable response value setting current (I <sub>sd</sub> ) / of S-trip / with I <sub>2t</sub> characteristic     |                 |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                                     | 15 A<br>250 A   |
| adjustable response value delay time (t <sub>sd</sub> ) / for S-tripping / with I <sub>0t</sub> characteristic     |                 |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                                     | 0.05 s<br>0.5 s |
| adjustable response value delay time (t <sub>sd</sub> ) / for S-tripping / with I <sub>2t</sub> characteristic     |                 |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                                     | 0.05 s<br>0.5 s |
| adjustable response value setting current (I <sub>i</sub> ) / for I-tripping                                       |                 |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                                     | 37 A<br>300 A   |
| adjustable current response value current / for G-tripping / with standard characteristic                          |                 |
| <ul style="list-style-type: none"> <li>• initial value</li> <li>• full-scale value</li> </ul>                      | 15 A<br>25 A    |
| adjustable response value delay time (t <sub>g</sub> ) / for G-tripping / with I <sub>0t</sub> characteristic      |                 |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                                     | 0.05 s<br>0.8 s |
| adjustable response value setting current (I <sub>g</sub> ) / for G-tripping / with I <sub>2t</sub> characteristic |                 |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                                     | 15 A<br>25 A    |
| adjustable response value delay time (t <sub>g</sub> ) / for G-tripping / with I <sub>2t</sub> characteristic      |                 |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                                     | 0.05 s<br>0.8 s |
| adjustable setting current (I <sub>n</sub> ) / for N-tripping                                                      |                 |

|                                         |                             |
|-----------------------------------------|-----------------------------|
| • minimum                               | 10 A                        |
| • maximum                               | 40 A                        |
| design of the N-conductor protection    | adjustable OFF; 40% to 160% |
| product function / grounding protection | Yes                         |

### Mechanical Design

|                                                                                           |                                |
|-------------------------------------------------------------------------------------------|--------------------------------|
| product component                                                                         |                                |
| • undervoltage release                                                                    | No                             |
| • voltage trigger                                                                         | No                             |
| • trip indicator                                                                          | No                             |
| height [in]                                                                               | 7.13 in                        |
| height                                                                                    | 181 mm                         |
| width [in]                                                                                | 4.13 in                        |
| type of connectable conductor cross-sections / of the round conductor terminal / stranded | 1 x (6 - 120 mm <sup>2</sup> ) |
| width                                                                                     | 105 mm                         |
| depth [in]                                                                                | 3.39 in                        |
| depth                                                                                     | 86 mm                          |

### Connections

|                                                                                       |                           |
|---------------------------------------------------------------------------------------|---------------------------|
| arrangement of electrical connectors / for main current circuit                       | Front terminal            |
| type of electrical connection / for main current circuit                              | double-sided box terminal |
| design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)    | tin                       |
| design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) | tin                       |

### Auxiliary circuit

|                                                |   |
|------------------------------------------------|---|
| number of CO contacts / for auxiliary contacts | 0 |
|------------------------------------------------|---|

### Accessories

|                                            |     |
|--------------------------------------------|-----|
| product extension / optional / motor drive | Yes |
|--------------------------------------------|-----|

### Environmental conditions

|                                    |        |
|------------------------------------|--------|
| protection class IP / on the front | IP40   |
| ambient temperature                |        |
| • during operation / minimum       | -25 °C |
| • during operation / maximum       | 70 °C  |
| • during storage / minimum         | -40 °C |
| • during storage / maximum         | 80 °C  |

### Environmental footprint

|                                                          |                 |
|----------------------------------------------------------|-----------------|
| global warming potential [CO2 eq] / total                | 61.814 kg       |
| global warming potential [CO2 eq] / during manufacturing | 14.6 kg         |
| global warming potential [CO2 eq] / during operation     | 48.9 kg         |
| global warming potential [CO2 eq] / after end of life    | -2.2 kg         |
| Siemens Eco Profile (SEP)                                | Siemens EcoTech |
| reference code / according to IEC 81346-2                | Q               |

### Approvals / Certificates

#### General Product Approval



[Miscellaneous](#)



[Confirmation](#)

| General Product Approval | EMV | Test Certificates |
|--------------------------|-----|-------------------|
|--------------------------|-----|-------------------|



[Special Test Certificate](#)

[Miscellaneous](#)

[Type Test Certificates/Test Report](#)

#### Maritime application



[CCS \(China Classification Society\)](#)

**other** **Dangerous goods** **Environment**

[Miscellaneous](#)

[Miscellaneous](#)

[Confirmation](#)



[Transport Information](#)

[Environmental Confirmations](#)

**Environment**

[Environmental Confirmations](#)



**Further information**

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information for data generation and storage**

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA2125-8KQ36-0AA0>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3VA2125-8KQ36-0AA0>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA2125-8KQ36-0AA0](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA2125-8KQ36-0AA0)

**CAX-Online-Generator**



<https://www.siemens.com/cax>

**Tender specifications**

<https://www.siemens.com/specifications>

**Characteristic curves**

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP="HAUPT"></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

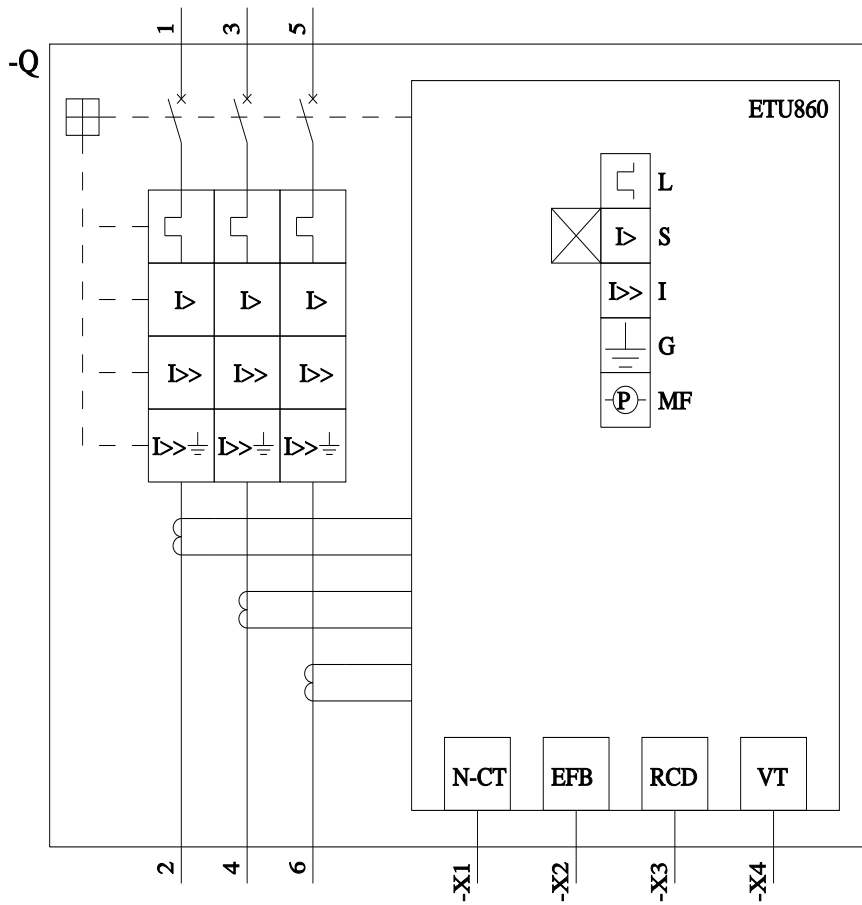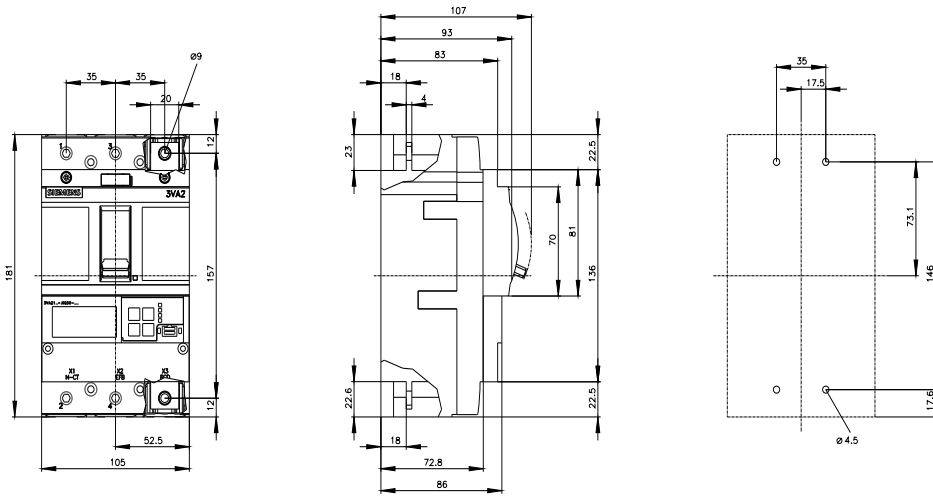

last modified:

5/25/2025



