



Residual current operated circuit breaker, 4-pole, Type A, short-time delayed, In: 63 A, 30 mA, Un AC: 400 V, with thermal overload protection

Model	
product brand name	SENTRON
product designation	Residual current operated circuit breaker
design of the product	Short-time delayed
product type designation	5SV3
product version	With thermal overload protection
General technical data	
number of poles	4
size of installation devices according to DIN 43880	1
mechanical service life (operating cycles) typical	10 000
short-circuit current of series fuse maximum permissible	100 A
short-circuit current rating	10 kA
switching function short-term delayed	Yes
degree of pollution	2
insulation voltage (Ui) rated value	2 000 V
tripping fault current rated value	30 mA
let-through current permissible	7 100 A
I ² t value permissible	110 000 A ² ·s
Supply voltage	
supply voltage for testing equipment minimum	195 V
value range of the supply voltage frequency	50 Hz
value range of the operating frequency	50/60 Hz
value range of the supply voltage at AC	400 V
Protection class	
protection class IP	IP20, if the distribution board is installed, with connected conductors
Breaking Capacity	
switching capacity current	
• according to IEC 61008-1 rated value	0.8 kA
grid spacing	60 mm
Dissipation	
power loss [W]	
• for rated value of the current at AC in hot operating state per pole	3.9 W
• maximum	11.7 W
Appearance	
RAL color number	7 035

RAL color number (similar)	7 035				
Product details					
product feature silicon-free	Yes				
product extension installable supplementary devices	Yes				
Connections					
connectable conductor cross-section solid					
• minimum	0.75 mm ²				
• maximum	35 mm ²				
connectable conductor cross-section stranded					
• minimum	0.75 mm ²				
• maximum	35 mm ²				
tightening torque with screw-type terminals					
• minimum	2.5 N·m				
• maximum	3 N·m				
position of power supply cord	top or bottom				
Mechanical Design					
height	90 mm				
width	72 mm				
depth	70 mm				
installation depth	70 mm				
number of modular width units	4				
fastening method	DIN rail				
mounting position	any				
Net Weight	377 g				
Environmental conditions					
ambient temperature during operation					
• minimum	-25 °C				
• maximum	45 °C				
ambient temperature during storage minimum	-40 °C				
number of test cycles for environmental testing according to IEC 60068-2-30	28				
Approvals Certificates					
Environment	General Product Approval				
Environmental Confirmations		Environmental Confirmations			
General Product Approval	Test Certificates				
Miscellaneous		Confirmation			Miscellaneous
other	Railway	Dangerous goods			
Confirmation		Special Test Certificate	Transport Information		
Further information					
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875					
Information for data generation and storage https://support.industry.siemens.com/cs/ww/en/view/109995012					
Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/lowvoltage/catalogs					

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SV3346-6LA01>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SV3346-6LA01>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SV3346-6LA01

CAX-Online-Generator


<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

https://curves.simarisiemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>

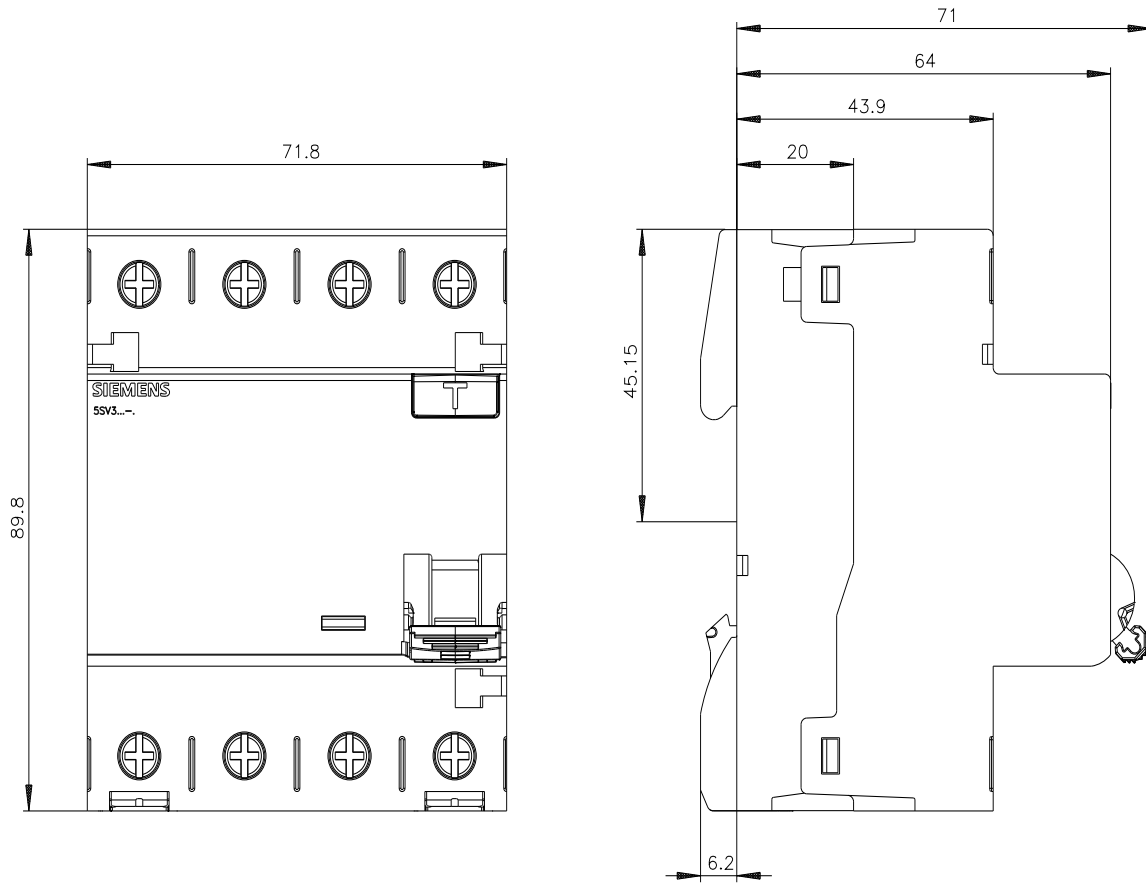



last modified:

10/9/2025

