



Main miniature circuit breaker (SHU), 1-pole, E 63A, 230/400 V (block with L1, L2, L3)

Model	
product brand name	SENTRON
product designation	Miniature circuit breaker
design of the product	Main miniature circuit breaker
General technical data	
number of poles	1
design of pole	1P
tripping characteristic class	E
mechanical service life (operating cycles) typical	20 000
overvoltage category	4
degree of pollution	3
Voltage	
insulation voltage (U <sub>i</sub> ) rated value	690 V
surge voltage resistance rated value	6 kV
supply voltage with single-phase operation at AC rated value	230 V
<ul style="list-style-type: none"> <li>● operational current                             <ul style="list-style-type: none"> <li>— at 30 °C rated value</li> <li>— at 40 °C rated value</li> <li>— at 50 °C rated value</li> <li>— at 55 °C rated value</li> </ul> </li> <li>● operational current at AC rated value</li> </ul>	63 A 59.85 A 56.7 A 55.125 A 63 A
Supply voltage	
supply voltage at AC	230 V
operating voltage rated value <ul style="list-style-type: none"> <li>● minimum</li> <li>● maximum</li> </ul>	110 V 440 V
supply voltage frequency rated value	50 Hz
Protection class	
protection class IP	IP40, with connected conductors
Breaking Capacity	
switching capacity current <ul style="list-style-type: none"> <li>● rated value</li> <li>● according to EN 60898 rated value</li> </ul>	25 kA 25 kA
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	9.7 W
suitability for operation	Residential buildings/infrastructure

Product details		
product component		
• outgoing feeder via spring-loaded terminal	Yes	
• infeed at box terminal	Yes	
product feature properties for main switches in accordance with EN 60204-1	Yes	
product feature sealable	Yes	
Display and operation		
display version for switch position indicator	OFF = green, ON = red	
Connections		
connectable conductor cross-section of spring-loaded terminal finely stranded with core end processing		
• minimum	2.5 mm <sup>2</sup>	
• maximum	16 mm <sup>2</sup>	
connectable conductor cross-section of the box terminal		
• solid minimum	2.5 mm <sup>2</sup>	
• solid maximum	50 mm <sup>2</sup>	
• stranded minimum	2.5 mm <sup>2</sup>	
• stranded maximum	50 mm <sup>2</sup>	
position of power supply cord	Stipulated by installation in the lower section of the meter panel	
Mechanical Design		
height	151.3 mm	
depth	89.5 mm	
depth of the enclosure	76.3 mm	
number of modular width units	1.5	
fastening method	Busbar	
fastening method other	on 40-mm busbar system in compliance with DIN 43870 Part 2	
Net Weight	1.3 kg	
Environmental conditions		
shock resistance	30 g, at least 3 impacts, impact duration 11 ms	
vibration resistance according to IEC 60068-2-6	2 g, 20 frequency cycles 5 to 150 to 15 Hz	
ambient temperature during operation		
• minimum	-25 °C	
• maximum	55 °C	
ambient temperature during storage		
• minimum	-40 °C	
• maximum	70 °C	
Approvals Certificates		
Environment	General Product Approval	other

[Environmental Conformations](#)

[Environmental Conformations](#)



other

[Confirmation](#)

#### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SP3763-2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SP3763-2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SP3763-2](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SP3763-2)

CAX-Online-Generator


<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP='HAUPT'></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>)

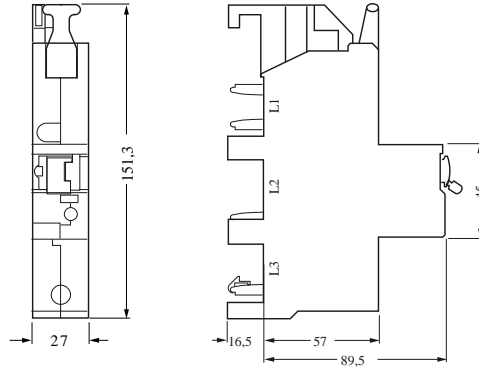

last modified:

7/22/2025

