



NEOZED fuse-link, D02, 32 A, gG, Un AC: 400 V, Un DC: 250 V, with tin-coated contact-caps

Model	
product brand name	SENTRON
product designation	NEOZED fuse link
design of the product	With tin-coated contact caps
product version	Pack of 10
design of the fuse link	NEOZED fuse link
General technical data	
size of fuse system according to EN 60269-1	D02
operating class of the fuse link	gG
Supply voltage	
supply voltage	
• at AC	400 V
• at DC	250 V
operating voltage rated value	400 V
protection class IP	IP20, with connected conductors
switching capacity current according to IEC 60947-2 rated value	50 kA
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	1.7 W
Main circuit	
operational current rated value	32 A
Appearance	
color coding of the fuse link	Violet
maximum short-circuit current breaking capacity (I _{cu}) at AC rated value	50 kA
Mechanical Design	
mounting position	Any, preferably vertical
Net Weight	13.5 g
ambient temperature during operation	
• minimum	-25 °C
• maximum	40 °C
environmental category	Up to 45°C at 95 % rel. humidity
Approvals Certificates	
Environment	General Product Approval

[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)



[Confirmation](#)



[Confirmation](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SE2332>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SE2332>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SE2332

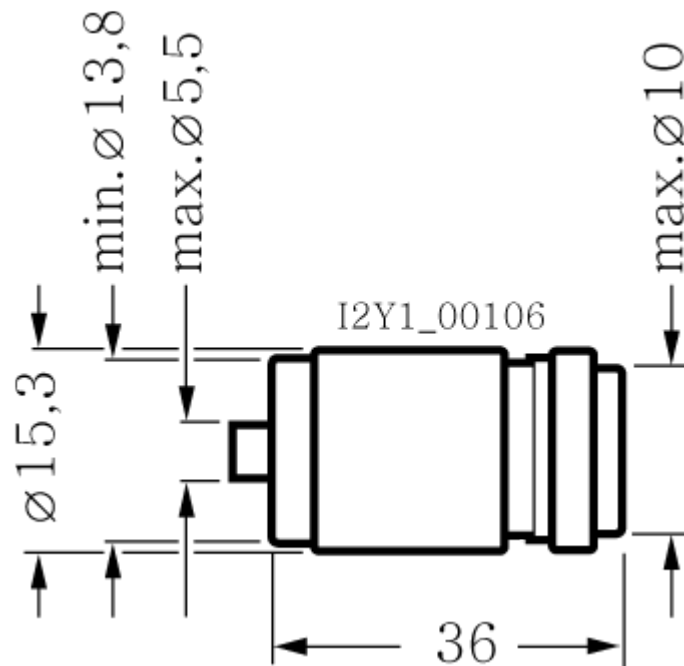
CAx-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>

last modified:

4/10/2025

