



SIRIUS Compact load feeder DOL starter 690 V 110...240 V AC/DC 50...60 Hz  
1...4 A IP20 Connection main circuit: plug-in, without terminals Connection auxiliary  
circuit: Spring-type terminal

|  |   |
|--|---|
| <b>product brand name</b>  | SIRIUS  |
| <b>product designation</b>   | compact starter   |
| <b>design of the product</b>   | direct starter  |
| <b>product type designation</b>                                      | 3RA61   |
| <b>General technical data</b>  |   |
| product function control circuit interface to parallel wiring        | Yes   |
| product extension auxiliary switch                                   | Yes   |
| <b>power loss [W] for rated value of the current</b>                 |   |
| • at AC in hot operating state                                       | 1 W   |
| • at AC in hot operating state per pole                              | 0.33 W  |
| • without load current share typical                                 | 6 W   |
| <b>insulation voltage rated value</b>                                | 690 V   |
| <b>degree of pollution</b>   | 3   |
| <b>surge voltage resistance rated value</b>                          | 6 000 V   |
| <b>maximum permissible voltage for protective separation</b>         |   |
| • between main and auxiliary circuit                                 | 400 V   |
| • between auxiliary and auxiliary circuit                            | 250 V   |
| • between control and auxiliary circuit                              | 300 V   |
| <b>degree of protection NEMA rating</b>                              | other   |
| <b>shock resistance</b>  | a=60 m/s <sup>2</sup> (6g) with 10 ms per 3 shocks in all axes  |
| <b>vibration resistance</b>  | f = 4 ... 5.8 Hz, d = 15 mm; f = 5.8 ... 500 Hz, a = 20 m/s <sup>2</sup> ; 10 cycles  |
| <b>mechanical service life (operating cycles)</b>                    |   |
| • of the main contacts typical                                       | 10 000 000  |
| • of auxiliary contacts typical                                      | 10 000 000  |
| • of the signaling contacts typical                                  | 10 000 000  |
| <b>electrical endurance (operating cycles) of auxiliary contacts</b> |   |
| • at DC-13 at 6 A at 24 V typical                                    | 30 000  |
| • at AC-15 at 6 A at 230 V typical                                   | 200 000   |
| <b>type of coordination</b>  | continuous operation according to IEC 60947-6-2   |
| <b>reference code according to IEC 81346-2</b>                       | Q   |
| <b>Substance Prohibitance (day/month/year)</b>                       | 05/01/2012  |
| <b>SVHC substance name</b>   | Lead CAS-No. 7439-92-1<br>Lead monoxide (lead oxide) CAS-No. 1317-36-8<br>2-(2H-benzotriazol-2-yl)-4-(1,1,3,3-tetramethylbutyl)phenol (UV-329) CAS-No. 3147-75-9<br>2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one CAS-No. 71868-10-5<br>Melamine CAS-No. 108-78-1<br>6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol CAS-No. 119-47-1 |
| <b>Net Weight</b>  | 1.389 kg  |
| <b>Ambient conditions</b>  |   |

|  |                            |
|--|----------------------------|
| installation altitude at height above sea level maximum                                    | 2 000 m                    |
| <b>ambient temperature</b>   |                            |
| • during operation   | -20 ... +60 °C             |
| • during storage   | -55 ... +80 °C             |
| • during transport   | -55 ... +80 °C             |
| relative humidity during operation   | 10 ... 90 %                |
| <b>Main circuit</b>  |                            |
| <b>number of poles for main current circuit</b>  | 3                          |
| <b>adjustable current response value current of the current-dependent overload release</b> | 1 ... 4 A                  |
| <b>formula for making capacity limit current</b>   | 12 x I <sub>e</sub>        |
| <b>formula for limit current breaking capacity</b>   | 10 x I <sub>e</sub>        |
| <b>yielded mechanical performance for 4-pole AC motor</b>                                  |                            |
| • at 400 V rated value   | 1.5 kW                     |
| • at 500 V rated value   | 2.2 kW                     |
| • at 690 V rated value   | 3 kW                       |
| operating voltage at AC-3 rated value maximum  | 690 V                      |
| <b>operational current</b>   |                            |
| • at AC at 400 V rated value   | 4 A                        |
| • at AC-3 at 400 V rated value   | 4 A                        |
| • at AC-43   |                            |
| — at 400 V rated value   | 3.6 A                      |
| — at 500 V rated value   | 3.9 A                      |
| — at 690 V rated value   | 3.8 A                      |
| <b>operating power</b>   |                            |
| • at AC-3 at 400 V rated value   | 1.5 kW                     |
| • at AC-43   |                            |
| — at 400 V rated value   | 1 500 W                    |
| — at 500 V rated value   | 2 200 W                    |
| — at 690 V rated value   | 3 000 W                    |
| <b>no-load switching frequency</b>   | 3 600 1/h                  |
| <b>operating frequency</b>   |                            |
| • at AC-41 according to IEC 60947-6-2 maximum  | 750 1/h                    |
| • at AC-43 according to IEC 60947-6-2 maximum  | 250 1/h                    |
| <b>Control circuit/ Control</b>  |                            |
| <b>type of voltage</b>   | AC/DC                      |
| <b>control supply voltage 1 at AC</b>  |                            |
| • at 50 Hz rated value   | 240 V                      |
| • at 50 Hz   | 110 ... 240 V              |
| • at 60 Hz   | 110 ... 240 V              |
| <b>control supply voltage frequency</b>  |                            |
| • 1 rated value  | 50 Hz                      |
| • 2 rated value  | 60 Hz                      |
| <b>control supply voltage 1 at DC rated value</b>  | 240 V                      |
| <b>control supply voltage 1 at DC</b>  | 110 ... 240 V              |
| <b>holding power</b>   |                            |
| • at AC maximum  | 6 W                        |
| • at DC maximum  | 5.1 W                      |
| <b>Auxiliary circuit</b>   |                            |
| <b>number of NC contacts for auxiliary contacts</b>  | 1                          |
| <b>number of NO contacts for auxiliary contacts</b>  | 1                          |
| number of NO contacts of instantaneous short-circuit trip unit for signaling contact       | 1                          |
| number of CO contacts of the current-dependent overload release for signaling contact      | 1                          |
| <b>operational current of auxiliary contacts at AC-12 maximum</b>                          | 10 A                       |
| operational current of auxiliary contacts at DC-13 at 250 V                                | 0.27 A                     |
| <b>Protective and monitoring functions</b>   |                            |
| <b>trip class</b>  | CLASS 10 and 20 adjustable |
| <b>operating short-circuit current breaking capacity (I<sub>cs</sub>)</b>                  |                            |

|  |  |
|--|--|
| <ul style="list-style-type: none"> <li>• at 400 V rated value</li> <li>• at 500 V rated value</li> <li>• at 690 V rated value</li> </ul>   | 53 kA<br>3 kA<br>3 kA  |
| <b>UL/CSA ratings</b>  |  |
| <b>full-load current (FLA) for 3-phase AC motor</b>  |  |
| <ul style="list-style-type: none"> <li>• at 480 V rated value</li> <li>• at 600 V rated value</li> </ul>   | 4 A<br>4 A   |
| yielded mechanical performance [hp] for 3-phase AC motor   |  |
| <ul style="list-style-type: none"> <li>• at 200/208 V rated value</li> <li>• at 220/230 V rated value</li> <li>• at 460/480 V rated value</li> <li>• at 575/600 V rated value</li> </ul>   | 0.75 hp<br>0.75 hp<br>2 hp<br>3 hp   |
| <b>contact rating of auxiliary contacts according to UL</b>  | contacts 21-22, 13-14, 43-44 Q600 / A600, contacts 77-78 R300 / B300, contacts 95-96-98 R300 / D300                              |
| <b>Short-circuit protection</b>  |  |
| <b>product function short circuit protection</b>   | Yes  |
| <b>design of short-circuit protection</b>  | electromagnetic  |
| <b>design of the fuse link</b>   |  |
| <ul style="list-style-type: none"> <li>• for short-circuit protection of the auxiliary switch required</li> <li>• for short-circuit protection of the signaling switch of the short-circuit release required</li> <li>• for short-circuit protection of the signaling switch of the overload release required</li> </ul> | fuse gL/gG: 10 A<br>6A gL/gG/400V<br>4A gL/gG/400V   |
| <b>Installation/ mounting/ dimensions</b>  |  |
| <b>mounting position</b>   | any  |
| <b>mounting position recommended</b>   | vertical, on horizontal standard DIN rail  |
| <b>fastening method</b>  | screw and snap-on mounting   |
| <b>height</b>  | 191 mm   |
| <b>width</b>   | 45 mm  |
| <b>depth</b>   | 165 mm   |
| <b>Connections/ Terminals</b>  |  |
| <b>product component removable terminal for main circuit</b>   | Yes  |
| <b>product component removable terminal for auxiliary and control circuit</b>  | Yes  |
| <b>type of electrical connection</b>   |  |
| <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control circuit</li> </ul>  | plug-in without terminals<br>spring-loaded terminals   |
| type of connectable conductor cross-sections for main contacts   |  |
| <ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded with core end processing</li> <li>• finely stranded without core end processing</li> </ul>   | 2x (1.5 ... 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup><br>2x (1.5 ... 6 mm <sup>2</sup> )<br>2x (1.5 ... 6 mm <sup>2</sup> )     |
| <b>type of connectable conductor cross-sections</b>  |  |
| <ul style="list-style-type: none"> <li>• for auxiliary contacts               <ul style="list-style-type: none"> <li>— solid</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> </ul> </li> <li>• for AWG cables for auxiliary contacts</li> </ul>          | 2x (0.25 ... 1.5 mm <sup>2</sup> )<br>2x (0.25 ... 1.5 mm <sup>2</sup> )<br>2x (0.25 ... 1.5 mm <sup>2</sup> )<br>2x (24 ... 16) |
| <b>Safety related data</b>   |  |
| <b>proportion of dangerous failures</b>  |  |
| <ul style="list-style-type: none"> <li>• with low demand rate according to SN 31920</li> <li>• with high demand rate according to SN 31920</li> </ul>  | 40 %<br>50 %   |
| <b>B10 value with high demand rate according to SN 31920</b>   | 3 000 000  |
| <b>failure rate [FIT] with low demand rate according to SN 31920</b>   | 100 FIT  |
| <b>IEC 61508</b>   |  |
| T1 value for proof test interval or service life according to IEC 61508  | 20 a   |
| <b>Electrical Safety</b>   |  |
| <b>protection class IP on the front according to IEC 60529</b>   | IP20   |
| <b>touch protection on the front according to IEC 60529</b>  | finger-safe  |

| Communication/ Protocol                                 |    |
|---|----|
| product function bus communication                      | No |
| protocol is supported                                   |    |
| • AS-Interface protocol                                 | No |
| • IO-Link protocol                                      | No |
| product function control circuit interface with IO link | No |

| Electromagnetic compatibility                                 |   |
|---|---|
| conducted interference  |   |
| • due to burst according to IEC 61000-4-4                     | 4 kV main contacts, 2 kV auxiliary contacts |
| • due to conductor-earth surge according to IEC 61000-4-5     | 4 kV main contacts, 2 kV auxiliary contacts |
| • due to conductor-conductor surge according to IEC 61000-4-5 | 2 kV main contacts, 1 kV auxiliary contacts |
| • due to high-frequency radiation according to IEC 61000-4-6  | 0.15-80Mhz at 10V                           |
| field-based interference according to IEC 61000-4-3           | 10 V/m                                      |
| electrostatic discharge according to IEC 61000-4-2            | 8 kV  |
| conducted HF interference emissions according to CISPR11      | 150 kHz ... 30 MHz Class A                  |
| field-bound HF interference emission according to CISPR11     | 30 ... 1000 MHz Class A                     |

| Supply voltage                            |    |
|---|----|
| Supply voltage required Auxiliary voltage | No |

| Display        |   |
|----------------|---|
| number of LEDs | 2 |

#### Approvals Certificates

| Environment | General Product Approval |
|-------------|--------------------------|
|-------------|--------------------------|

[Environmental Conformations](#)



| General Product Approval | EMV | Functional Safety | Test Certificates | Maritime application | other |
|--------------------------|-----|-------------------|-------------------|----------------------|-------|
|--------------------------|-----|-------------------|-------------------|----------------------|-------|



[Type Examination Certificate](#)

[Type Test Certificates/Test Report](#)



[Confirmation](#)

| other | Dangerous goods |
|-------|-----------------|
|-------|-----------------|

[Confirmation](#)



[Transport Information](#)

#### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA6120-2CP33>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RA6120-2CP33>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RA6120-2CP33&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA6120-2CP33&lang=en)

Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA6120-2CP33>

Characteristic curves

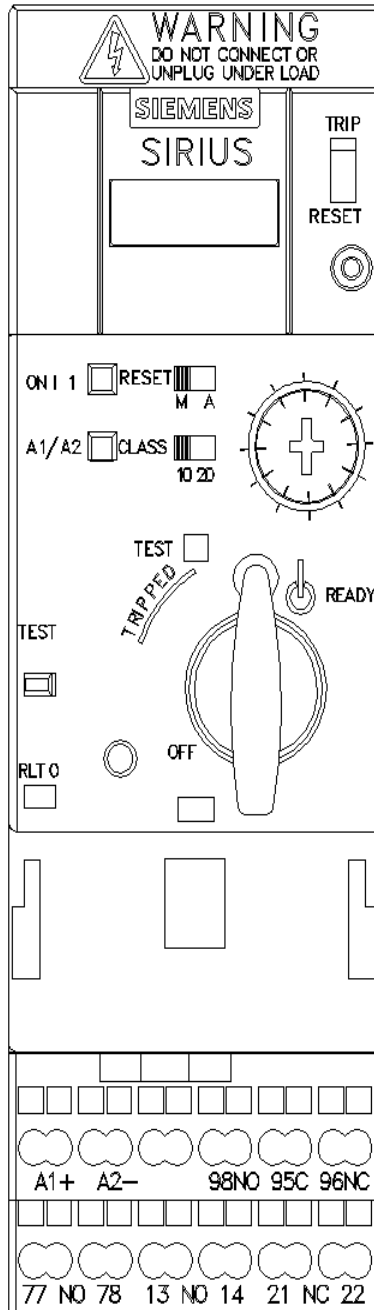

last modified:

4/4/2026 