

incandescent lamp, 230 V AC, 5 CO contacts, base BA15d, accessory for signaling columns, with diameter 50 mm + 70 mm, (packing unit 10 units)



product brand name	SIRIUS	
product designation	Incandescent lamp	
<b>General technical data</b>		
type of voltage of the operating voltage	AC	
operating voltage		
• 1 at AC at 50 Hz rated value	230 V	
• 1 at AC at 60 Hz rated value	230 V	
relative positive tolerance of the operating voltage	10 %	
relative negative tolerance of the operating voltage	-10 %	
reference code according to EN 61346-2	P	
<b>Lamp</b>		
type of light source	filament lamp	
socket design	BA 15d	
<b>Enclosure</b>		
height	42 mm	
width	16 mm	
outer diameter of the signal column element	70 mm	
<b>Ambient conditions</b>		
ambient temperature during operation	-20 ... +50 °C	
<b>Approvals Certificates</b>		
General Product Approval	Maritime application	other



[Confirmation](#)



[Confirmation](#)

other

Environment

[Confirmation](#)



[Environmental Confirmations](#)



**Further information**

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4358-1XX>

Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD4358-1XX>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8WD4358-1XX>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=8WD4358-1XX&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD4358-1XX&lang=en)

**-P**

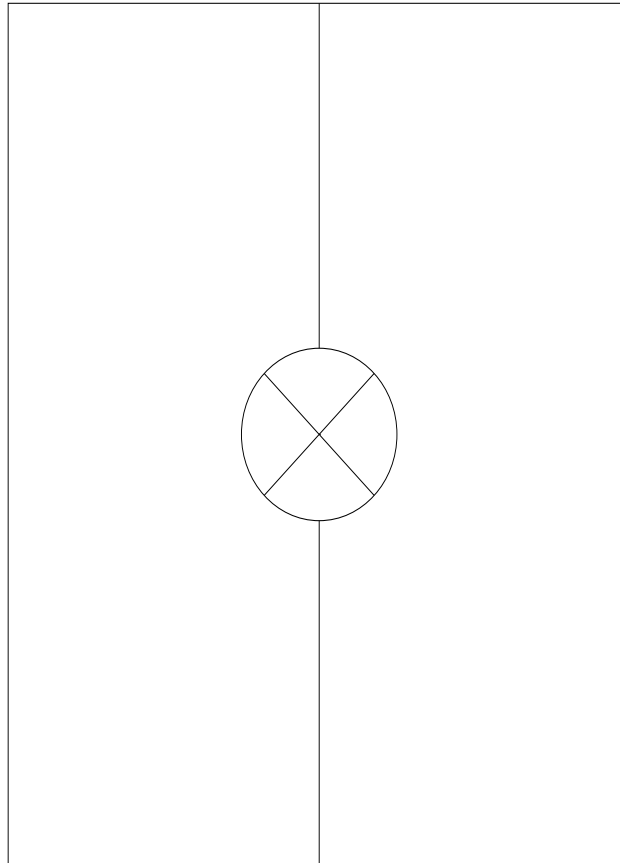

last modified:

4/1/2025 