



basic device SIMOCODE pro V PB, PROFIBUS DP interface 12 Mbps, RS-485, 4 I/3 O freely configurable, Us: 110...240 V AC/DC, input for thermistor connection monostable relay outputs, expandable by expansion modules

<b>product brand name</b>	SIMOCODE
<b>product designation</b>	Motor management system
<b>design of the product</b>	basic unit 2
<b>product type designation</b>	pro V PB
<b>General technical data</b>	
<b>certificate of suitability</b>	CE / UL / CSA / CCC / C-Tick (RCM) / GOST / NOM / ATEX / NEPSI / ABS / DNV / GL / LRS / RoHS
<b>product function</b>	
<ul style="list-style-type: none"> <li>• current measurement</li> <li>• voltage measurement</li> <li>• active power measurement</li> <li>• energy measurement</li> <li>• frequency measurement</li> <li>• bus communication</li> <li>• data acquisition function</li> <li>• diagnostics function</li> <li>• password protection</li> <li>• test function</li> <li>• maintenance function</li> <li>• MRRT redundancy procedure</li> </ul>	<ul style="list-style-type: none"> <li>No</li> <li>No</li> <li>Yes</li> <li>No</li> <li>No</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>No</li> </ul>
<b>product component</b>	
<ul style="list-style-type: none"> <li>• input for thermistor connection</li> <li>• digital input</li> <li>• input for analog temperature sensors</li> <li>• input for ground fault detection</li> <li>• relay output</li> </ul>	<ul style="list-style-type: none"> <li>Yes</li> <li>Yes</li> <li>No</li> <li>No</li> <li>Yes</li> </ul>
<b>product extension</b>	
<ul style="list-style-type: none"> <li>• temperature monitoring module</li> <li>• current measuring module</li> <li>• current/voltage measuring module</li> <li>• fail-safe digital I/O module</li> <li>• ground-fault monitoring module</li> <li>• decoupling module</li> <li>• analog I/O module</li> <li>• digital I/O module with monostable outputs</li> <li>• digital I/O module with bistable outputs</li> <li>• control unit with display</li> <li>• control unit</li> </ul>	<ul style="list-style-type: none"> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> </ul>
<b>apparent power consumption</b>	8.3 VA

<b>consumed active power</b>	3.6 W
insulation voltage with degree of pollution 3 at AC rated value	300 V
<b>surge voltage resistance rated value</b>	4 000 V
<b>shock resistance</b>	
• according to IEC 60068-2-27	15 g / 11 ms
• vibration resistance	1 ... 6 Hz / 15 mm; 6 ... 500 Hz / 2 g
<b>switching capacity current of the NO contacts of the relay outputs at AC-15</b>	
• at 24 V	6 A
• at 120 V	6 A
• at 230 V	3 A
<b>switching capacity current of the NO contacts of the relay outputs at DC-13</b>	
• at 24 V	2 A
• at 60 V	0.55 A
• at 125 V	0.25 A
<b>mechanical service life (operating cycles) typical</b>	10 000 000
electrical endurance (operating cycles) typical	100 000
<b>buffering time in the event of power failure</b>	0.2 s
<b>reference code according to IEC 81346-2</b>	F
continuous current of the NO contacts of the relay outputs	
• at 50 °C	6 A
• at 60 °C	5 A
<b>type of input characteristic</b>	Type 1 in accordance with EN 61131-2
<b>Substance Prohibitance (day/month/year)</b>	05/01/2012
<b>SVHC substance name</b>	Lead CAS-No. 7439-92-1 Lead monoxide (lead oxide) CAS-No. 1317-36-8 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one CAS-No. 71868-10-5 Melamine CAS-No. 108-78-1
<b>Net Weight</b>	357 g
<b>Electromagnetic compatibility</b>	
EMC emitted interference according to IEC 60947-1	class A
EMC immunity according to IEC 60947-1	corresponds to degree of severity 3
<b>conducted interference</b>	
• due to burst according to IEC 61000-4-4	2 kV (power ports) / 1 kV (signal ports)
• due to conductor-earth surge according to IEC 61000-4-5	2 kV
• due to conductor-conductor surge according to IEC 61000-4-5	1 kV
• due to high-frequency radiation according to IEC 61000-4-6	10 V
<b>field-based interference according to IEC 61000-4-3</b>	10 V/m
<b>electrostatic discharge according to IEC 61000-4-2</b>	6 kV contact discharge / 8 kV air discharge
<b>conducted HF interference emissions according to CISPR11</b>	corresponds to degree of severity A
<b>field-bound HF interference emission according to CISPR11</b>	corresponds to degree of severity A
<b>Inputs/ Outputs</b>	
<b>product function</b>	
• parameterizable inputs	Yes
• parameterizable outputs	Yes
<b>number of inputs</b>	4
• for thermistor connection	1
number of digital inputs with a common reference potential	4
<b>digital input version</b>	
• type 1 acc. to IEC 61131	Yes
<b>input voltage at digital input at DC</b>	
• rated value	24 V
<b>number of outputs</b>	3
<b>number of semiconductor outputs</b>	0
<b>number of outputs as contact-affected switching element</b>	3

<b>switching behavior</b>	monostable
<b>number of relay outputs</b>	3
<b>type of relay outputs</b>	Monostable
<b>wire length for digital signals maximum</b>	300 m
<b>wire length for thermistor connection</b>	
• with conductor cross-section = 0.5 mm <sup>2</sup> maximum	50 m
• with conductor cross-section = 1.5 mm <sup>2</sup> maximum	150 m
• with conductor cross-section = 2.5 mm <sup>2</sup> maximum	250 m

### Protective and monitoring functions

<b>product function</b>	
• asymmetry detection	Yes
• blocking current evaluation	Yes
• power factor monitoring	Yes
• ground fault detection	Yes
• ground-fault monitoring	No
• phase failure detection	Yes
• phase sequence recognition	Yes
• voltage detection	Yes
• monitoring of number of start operations	Yes
• overvoltage detection	Yes
• overcurrent detection 1 phase	Yes
• undervoltage detection	Yes
• undercurrent detection 1 phase	Yes
• active power monitoring	Yes
<b>product function</b>	
• current detection	Yes
• overload protection	Yes
• evaluation of thermistor motor protection	Yes
<b>total cold resistance number of sensors in series maximum</b>	1.5 kΩ
<b>response value of thermoresistor</b>	3 400 ... 3 800 Ω
• of the short-circuit control	9 Ω
<b>release value of thermoresistor</b>	1 500 ... 1 650 Ω

### Motor control functions

<b>product function</b>	
• parameterizable overload relay	Yes
• circuit breaker control	Yes
• direct start	Yes
• reverse starting	Yes
• star-delta circuit	Yes
• star-delta reversing circuit	Yes
• Dahlander circuit	Yes
• Dahlander reversing circuit	Yes
• pole-changing switch circuit	Yes
• pole-changing switch reversing circuit	Yes
• slide control	Yes
• valve control	Yes

### Communication/ Protocol

<b>protocol is supported</b>	
• PROFIBUS DP protocol	Yes
• PROFINET IO protocol	No
• PROFI-safe protocol	Yes
• Modbus RTU	No
• EtherNet/IP	No
• OPC UA Server	No
• LLDP	No
• Address Resolution Protocol (ARP)	No
• SNMP	No
• HTTPS	No
• NTP	No

<ul style="list-style-type: none"> <li>Media Redundancy Protocol (MRP)</li> </ul>	No
<b>product function</b>	
<ul style="list-style-type: none"> <li>web server</li> <li>shared device</li> <li>at the Ethernet interface Autocrossover</li> <li>at the Ethernet interface Autonegotiation</li> <li>at the Ethernet interface Autosensing</li> <li>is supported Device Level Ring (DLR)</li> <li>is supported PROFINET system redundancy (S2)</li> <li>supports PROFINET measured values</li> <li>supports PROFINET shutdown</li> </ul>	No No No No No No No No
<b>transfer rate maximum</b>	12 Mbit/s
<b>identification &amp; maintenance function</b>	
<ul style="list-style-type: none"> <li>I&amp;M0 - device-specific information</li> <li>I&amp;M1 - higher level designation/location designation</li> <li>I&amp;M2 - installation date</li> <li>I&amp;M3 - comment</li> </ul>	Yes Yes Yes Yes
type of electrical connection of the communication interface	9-pin SUB-D socket (12 Mbit) / screw terminal (1.5 Mbit)
<b>Installation/ mounting/ dimensions</b>	
<b>mounting position</b>	any
<b>fastening method</b>	screw and snap-on mounting
<b>height</b>	111 mm
<b>width</b>	45 mm
<b>depth</b>	124 mm
<b>required spacing</b>	
<ul style="list-style-type: none"> <li>top</li> <li>bottom</li> <li>left</li> <li>right</li> </ul>	40 mm 40 mm 0 mm 0 mm
<b>Connections/ Terminals</b>	
<b>product component removable terminal for auxiliary and control circuit</b>	Yes
<b>type of electrical connection</b>	
<ul style="list-style-type: none"> <li>for auxiliary and control circuit</li> </ul>	screw-type terminals
<b>type of connectable conductor cross-sections</b>	
<ul style="list-style-type: none"> <li>solid</li> <li>finely stranded with core end processing</li> <li>for AWG cables solid</li> <li>for AWG cables stranded</li> </ul>	1x (0.5 ... 4.0mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> ) 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> ) 1x (20 ... 12), 2x (20 ... 14) 1x (20 ... 14), 2x (20 ... 16)
tightening torque with screw-type terminals	0.8 ... 1.2 N·m
tightening torque [lbf·in] with screw-type terminals	7 ... 10.3 lbf·in
<b>type of connectable conductor cross-sections for PROFIBUS wire</b>	2x 0.34 mm <sup>2</sup> , AWG 22
<b>Ambient conditions</b>	
installation altitude at height above sea level maximum	2 000 m
<ul style="list-style-type: none"> <li>note</li> </ul>	Restrictions apply to higher installation altitudes, see: <a href="https://support.industry.siemens.com/cs/document/109995153">https://support.industry.siemens.com/cs/document/109995153</a>
<b>ambient temperature</b>	
<ul style="list-style-type: none"> <li>during operation</li> <li>during storage</li> <li>during transport</li> </ul>	-25 ... +60 °C -40 ... +80 °C -40 ... +80 °C
<b>environmental category</b>	
<ul style="list-style-type: none"> <li>during operation according to IEC 60721</li> <li>during storage according to IEC 60721</li> <li>during transport according to IEC 60721</li> </ul>	3K6 (no formation of ice, no condensation, relative humidity 10 ... 95%), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (no condensation, relative humidity 10 ... 95%), 1C2 (no salt mist), 1S2 (sand must not get into the devices), 1M4 2K2, 2C1, 2S1, 2M2
<b>relative humidity</b>	
<ul style="list-style-type: none"> <li>during operation</li> </ul>	5 ... 95 %
<b>contact rating of auxiliary contacts according to UL</b>	B300 / R300

Short-circuit protection	
design of short-circuit protection per output	Fuse links: gG 6 A, quick-response 10 A (IEC 60947-5-1), miniature circuit-breaker C char.: 1.6 A (IEC 60947-5-1) or 6 A (I <sub>N</sub> < 500 A)
Electrical Safety	
touch protection against electrical shock	finger-safe
ATEX	
<b>certificate of suitability</b> <ul style="list-style-type: none"> <li>• IECEx</li> <li>• according to ATEX directive 2014/34/EU</li> <li>• acc. to Equipment and Protective System Intended for Use in Potentially Explosive Atmospheres Regulations 2016 (S.I. 2016 No.1107)</li> <li>• according to UKCA</li> </ul>	Yes; IECEx BVS 20.0020 / IECEx PTB 18.0004X BVS 06 ATEX F001, PTB 18 ATEX 5003 X ITS21UKEX0464, ITS21UKEX0455X  ITS21UKEX0464, ITS21UKEX0455X
Galvanic isolation	
(electrically) protective separation according to IEC 60947-1	All circuits with protective separation (double creepage paths and clearances), the information in the "Protective Separation" test report, No. A0258, must be observed (link see further information)
<b>design of the electrical isolation</b> <ul style="list-style-type: none"> <li>• note</li> </ul>	Protective separation in accordance with IEC 60947-1 for all circuits Test report No. A0258 must be observed (https://support.industry.siemens.com/cs/document/109748152)
Control circuit/ Control	
product function soft starter control	Yes
type of voltage of the control supply voltage	AC/DC
<b>control supply voltage at AC</b> <ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> <li>• at 60 Hz rated value</li> </ul>	110 ... 240 V 110 ... 240 V
<b>control supply voltage frequency</b> <ul style="list-style-type: none"> <li>• 1 rated value</li> <li>• 2 rated value</li> </ul>	50 Hz 60 Hz
relative symmetrical tolerance of the control supply voltage frequency	5 %
control supply voltage at DC rated value	110 ... 240 V
<b>operating range factor control supply voltage rated value at DC</b> <ul style="list-style-type: none"> <li>• initial value</li> <li>• full-scale value</li> </ul>	0.85 1.1
<b>operating range factor control supply voltage rated value at AC at 50 Hz</b> <ul style="list-style-type: none"> <li>• initial value</li> <li>• full-scale value</li> </ul>	0.85 1.1
<b>operating range factor control supply voltage rated value at AC at 60 Hz</b> <ul style="list-style-type: none"> <li>• initial value</li> <li>• full-scale value</li> </ul>	0.85 1.1
<b>inrush current peak</b> <ul style="list-style-type: none"> <li>• at 240 V</li> </ul>	15 A
<b>duration of inrush current peak</b> <ul style="list-style-type: none"> <li>• at 240 V</li> </ul>	1 ms

Approvals Certificates	
Environment	General Product Approval

[Environmental Confirmations](#)



General Product Approval	EMV	For use in hazardous locations
--------------------------	-----	--------------------------------



For use in hazardous locations	Test Certificates			
--------------------------------	-------------------	--	--	--



[Miscellaneous](#)

[Special Test Certificate](#)

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

Maritime application	other	Industrial Communication		
----------------------	-------	--------------------------	--	--



[Confirmation](#)

[Confirmation](#)



Further information
---------------------

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UF7010-1AU00-0>

Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UF7010-1AU00-0>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3UF7010-1AU00-0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3UF7010-1AU00-0&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UF7010-1AU00-0&lang=en)

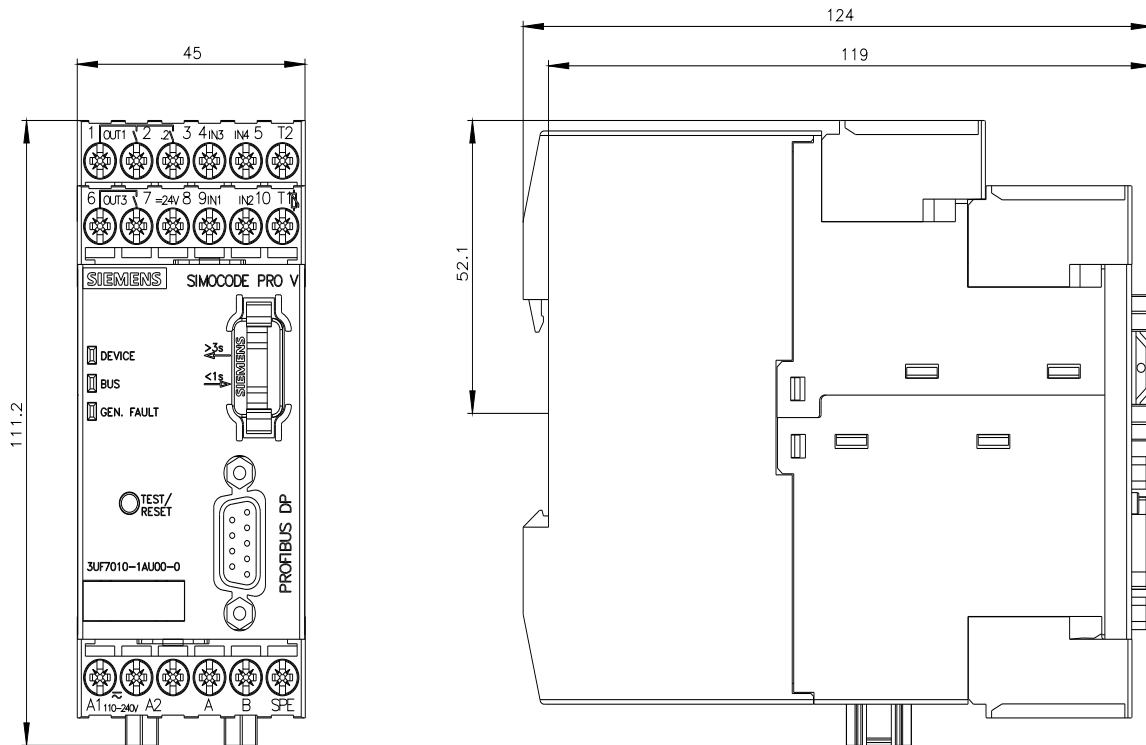

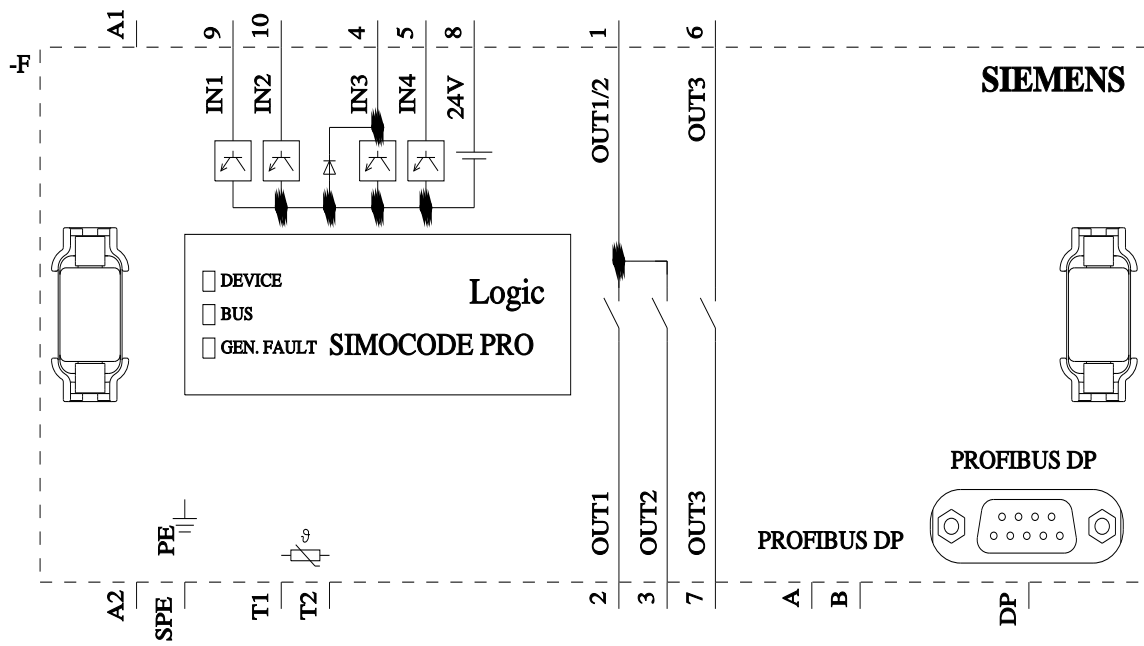

last modified:

4/4/2026