



busbar system busbar center-to-center spacing 60 mm connection module, width: 18 mm busbar thickness: 5.10 mm+TT profile 4 conductors PE/N, 1.5 to 16 mm² connection from above and below

Model	
product brand name	SENTRON
product designation	Connection modules
design of the product	Accessories
Supply voltage	
operating voltage at AC rated value	690 V
Connections	
type of connectable conductor cross-sections for copper conductor stranded	16 mm ²
Mechanical Design	
width	18 mm
busbar center-to-center spacing	60 mm
Net Weight	129 g
Approvals Certificates	

Environment	General Product Approval
-------------	--------------------------

[Environmental Conformations](#)

[Environmental Conformations](#)



[Confirmation](#)

General Product Approval	Test Certificates	other
--------------------------	-------------------	-------



[Miscellaneous](#)

[Confirmation](#)



[Miscellaneous](#)

Further information

- Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information for data generation and storage
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
- Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/lowvoltage/catalogs>
- Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1200-0AA00>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/8US1200-0AA00>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1200-0AA00
- CAX-Online-Generator


<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>

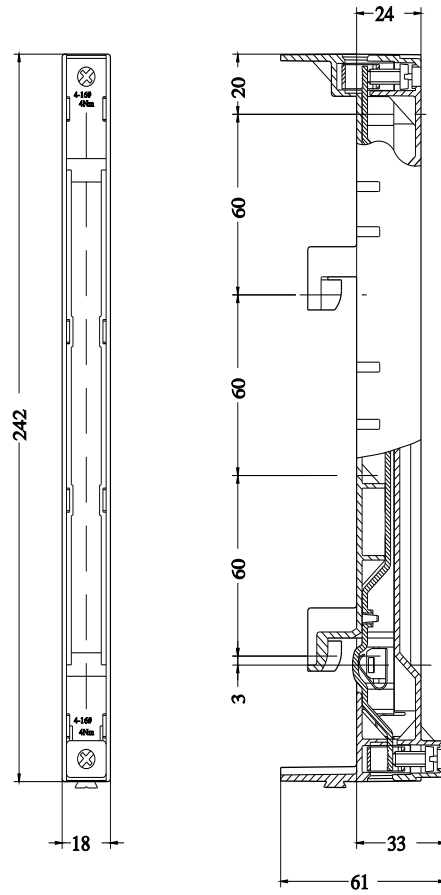

last modified:

4/13/2025 

