

Square SMD Fuse 4012

multicomp PRO

**RoHS
Compliant**



Agency Approvals

Agency	Ampere Rating
Certified products for U.S. and Canada	10A - 35A

UL Approved

Interrupting Rating

10A to 35A : 100 amperes at 250V AC
 150 amperes at 125V AC
 130 amperes at 80V DC
 300 amperes at 72V DC

Application

The product offers high-amp circuit protection and surface mount fuses help space saving.

Specifications

Material

Body : Ceramic
 Termination : Gold Plated, Brass Caps
 Operating Temperature : -55°C to +125°C

Electrical Characteristics

Ampere Rating	Opening Time	
	1 In	2 In
	Min.	Max.
10A to 35A	4 hr	60 sec.


Part Number	Ampere Rating (A)	Voltage Rating (V)	Nominal Cold Resistance (Ω)	Nominal Melting I^2t ($A^2 \text{ sec.}$)
MP005507	10	250	0.0067	75
MP005508	15		0.005	141.75
MP005509	20		0.003	356
MP005510	25		0.0024	625
MP005511	30		0.0018	900
MP005512	35		0.0014	1320

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 sg.element14.com/b/multicomp-pro

multicomp PRO


Square SMD Fuse 4012

Mechanical Dimensions

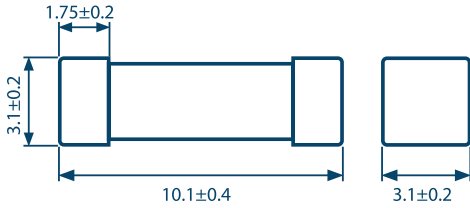


Dimensions : Millimetres

Average Melting It Curves

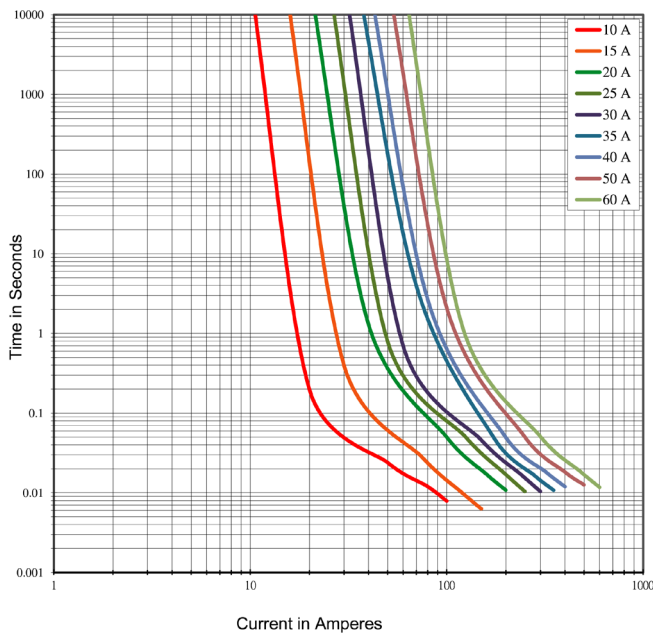

Average Melting I²t Curve

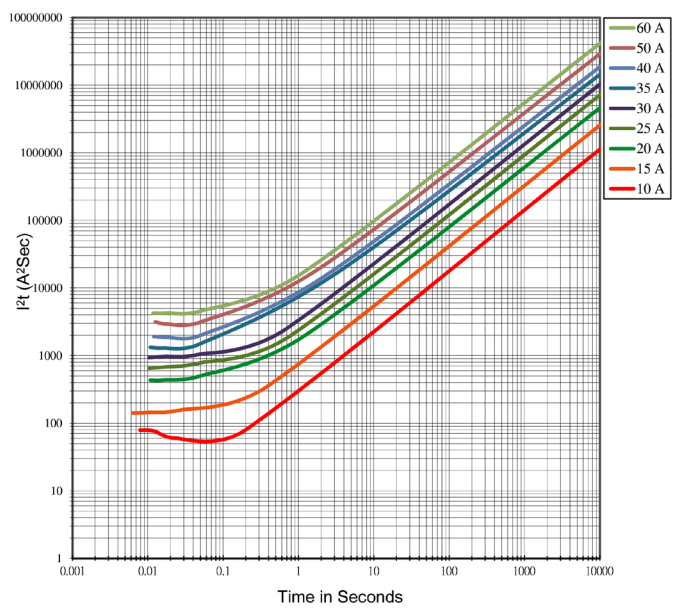

Part Number Table

Description	Part Number
SMD Fuse, 10A, 250V, 4012	MP005507
SMD Fuse, 15A, 250V, 4012	MP005508
SMD Fuse, 20A, 250V, 4012	MP005509
SMD Fuse, 25A, 250V, 4012	MP005510
SMD Fuse, 30A, 250V, 4012	MP005511
SMD Fuse, 35A, 250V, 4012	MP005512

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.