

Square SMD Fuse 4012

multicomp^{PRO}

RoHS
Compliant



Agency Approvals

Agency	Ampere Rating
Certified products for U.S. and Canada	1.25A - 2A

Interrupting Rating

60 amperes at 250V AC
60 amperes at 600V AC
50 amperes at 250V DC
100 amperes at 125V DC

Application

The product are designed to allow compliance with Telcordia GR-1089-CORE and TIA968-A

Specifications

Material


Body : Ceramic
Termination : Gold Plated, Brass Caps
Operating Temperature : -55°C to +125°C
UL Approved

Electrical Characteristics

Ampere Rating	Opening Time		
	1 In	2.5 In	
	Min.	Min.	Max.
1.25A and 2A	4 hr	1 sec	120 sec

Part Number	Ampere Rating (A)	Voltage Rating (V)	Nominal Cold Resistance (Ω)	Nominal Melting I ² t (A ² sec.)
MP005513	1.25	600V	0.1	22
MP005514	2		0.055	24

Mechanical Dimensions

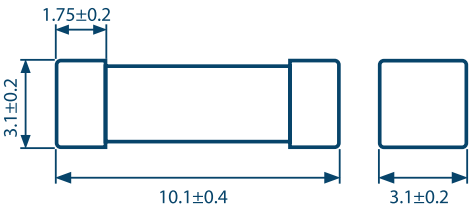

Dimensions : Millimetres


Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicomp^{PRO}


Square SMD Fuse 4012

multicompPRO

Average Melting It Curves

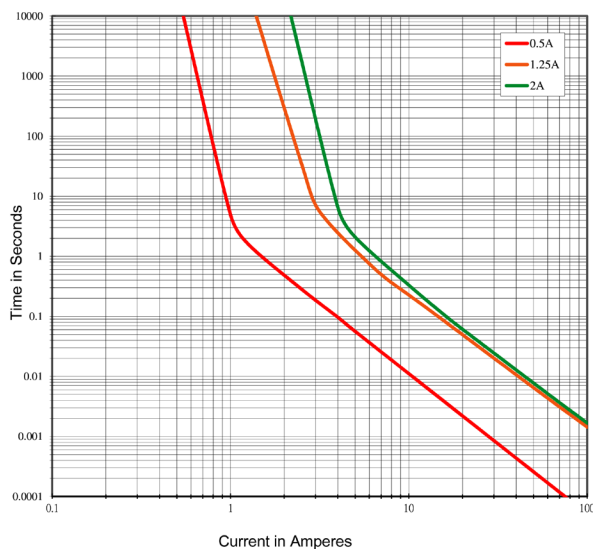

Average Melting I²t Curve

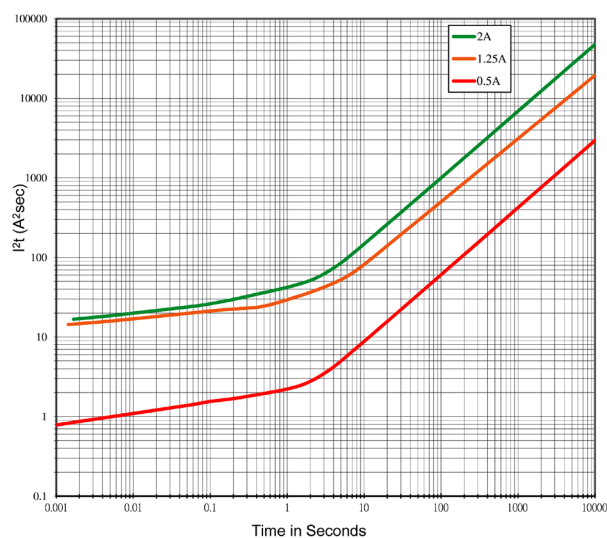

Part Number Table

Description	Part Number
SMD Fuse, 1.25A, 600V, 4012	MP005513
SMD Fuse, 2A, 600V, 4012	MP005514

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicompPRO