
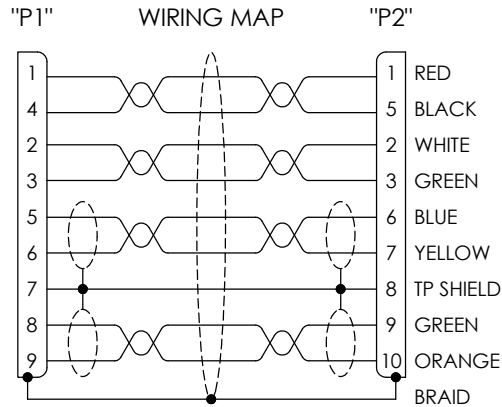


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/25/2021	GUTTADAURO

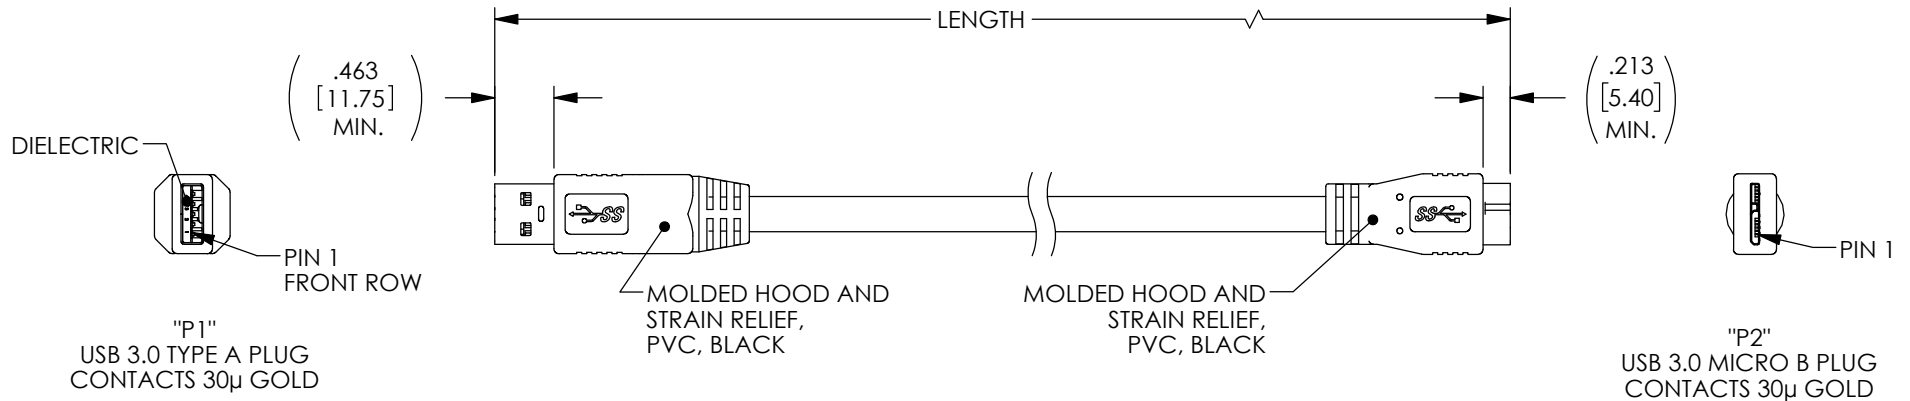


UL STYLE 20276, USB3.0 HIGH FLEX CABLE,
(2) TWISTED PAIR, 28AWG WITH ALUM/POLY, DRAIN WIRE AND SPIRAL SHIELD,
(1) UNSHIELDED TWISTED PAIR, 26AWG,
(1) UNSHIELDED TWISTED PAIR, 22AWG,
OVERALL ALUM/POLY AND BRAIDED SHIELD,
JACKET: PVC, BLACK
(NOM DIA. .276" [7.0]); FLAME RATING: UL VW-1;
MIN. FIXED BEND RADIUS: 5X O.D.;
MIN. MOVING BEND RADIUS: 10X O.D.)

PART NUMBER	LENGTH METERS [FEET]
CAU3HFAMB-BLK-05M	0.5 [1.64]
CAU3HFAMB-BLK-1M	1.0 [3.28]
CAU3HFAMB-BLK-105M	1.5 [4.92]
CAU3HFAMB-BLK-2M	2.0 [6.56]
CAU3HFAMB-BLK-3M	3.0 [9.84]

NOTES:

- CABLE TYPE-U DRAG CHAIN TESTING:
5 MILLION CYCLES MIN.(75mm BEND RADIUS)
- CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE		L-com™ an INFINITI® brand		50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936			
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +5 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		DRAWN BY SLI		12/09/2020		CATEGORY		USB			
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5] FRACTIONS .XX = ±.02 [.5] ±1/32 .XXX = ±.005 [.13] ANGLES ±1°		CHECKED BY GUTTADAURO		12/09/2020							
THIRD-ANGLE PROJECTION		APPROVED BY GUTTADAURO		12/09/2020							
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION		CA, USB3.0 A/MICB HIGH FLEX DRAG CHAIN							
THIRD-ANGLE PROJECTION		COLOR VARIATIONS MAY OCCUR		SIZE A		CAGE CODE 43321		DWG. NO. CAU3HFAMB-BLK		REV. A	
				SCALE: NONE		CAD FILE: CAU3HFAMB-BLK.SLDDRW				SHEET 1 OF 1	