

2.4 GHz to 2.5 GHz 24 dBi Lightweight Die-cast
Grid Antenna Type N Female Connector



HG2424EG-1-NF

Features

- All weather operation
- Easy to assemble
- UV stable powder coat finish
- Die-cast aluminum construction
- High Gain

Applications

- 2.4 GHz ISM Band
- IEEE 802.11b/g/n Wireless LAN Applications
- Point to Point (PtP) Systems & Point to Multi-point (PtMP) Systems
- Wi-Fi Systems & Long-range Directional Applications
- Wireless Bridges, Backhaul Applications & Wireless Video Systems

Description

The L-com HG2424EG-1-NF is a high-performance light weight reflector grid antenna specifically designed for long-range directional point to point systems, point to multipoint and wireless bridges. L-com’s HG2424EG-1-NF has 22 to 24 dBi gain. The HG2424EG-1-NF operates from 2400 to 2500 MHz which is ideal for WLAN backhaul.

The HG2424EG-1-NF from L-com has 14° Vertical and 12° Horizontal Beamwidth patterns with vertical or horizontal polarization and features Type N female connectors. The 2400-2500 MHz HG2424EG-1-NF is shipped as a 2-piece reflector grid which is simple to assemble and greatly reduces shipping costs.

The Type N female connectorized HG2424EG-1-NF antenna from L-com has mounting bracket and hardware included which makes this antenna very easy to install. This high-performance light weight reflector grid antenna just like our wide selection of superior quality RF parts, ship same day. Contact our knowledgeable and friendly technical support and sales staff for your answers on antennas or other L-com products.

Configuration

Design	Grid
Polarization	Vertical
Connector Type	N Female

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	2.4		2.5	GHz
Input VSWR			1.5:1	
Impedance		50		Ohms
Gain		24		dBi
Front to Back Ratio	31			dB
Horizontal (Azimuth) HPBW		12		Degrees
Vertical (Elevation) HPBW		14		Degrees
Input Power			100	Watts

Click the following link (or enter part number in “SEARCH” on website) to obtain additional part information including price, inventory and certifications:
[2.4 GHz to 2.5 GHz 24 dBi Lightweight Die-cast Grid Antenna Type N Female Connector HG2424EG-1-NF](#)

2.4 GHz to 2.5 GHz 24 dBi Lightweight Die-cast
Grid Antenna Type N Female Connector



HG2424EG-1-NF

Mechanical Specifications

Size

Length	23.622 in [600 mm]
Width	38.976 in [989.99 mm]
Height	50 in [127 cm]
Mounting Mast Diameter	1.57 to 1.96 in [39.88 to 49.78 mm]
Weight	6.61387 lbs [3 kg]

Environmental Specifications

Temperature

Operating Range	-40 to +70 deg C
Wind Survivability	124 MPH [199.56 KPH]
Humidity	5 to 95 %

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data


Notes:

2.4 GHz to 2.5 GHz 24 dBi Lightweight Die-cast Grid Antenna Type N Female Connector from L-com has same day shipment for domestic and International orders. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

2.4 GHz to 2.5 GHz 24 dBi Lightweight Die-cast Grid Antenna Type N Female Connector

L-com CAD Drawing

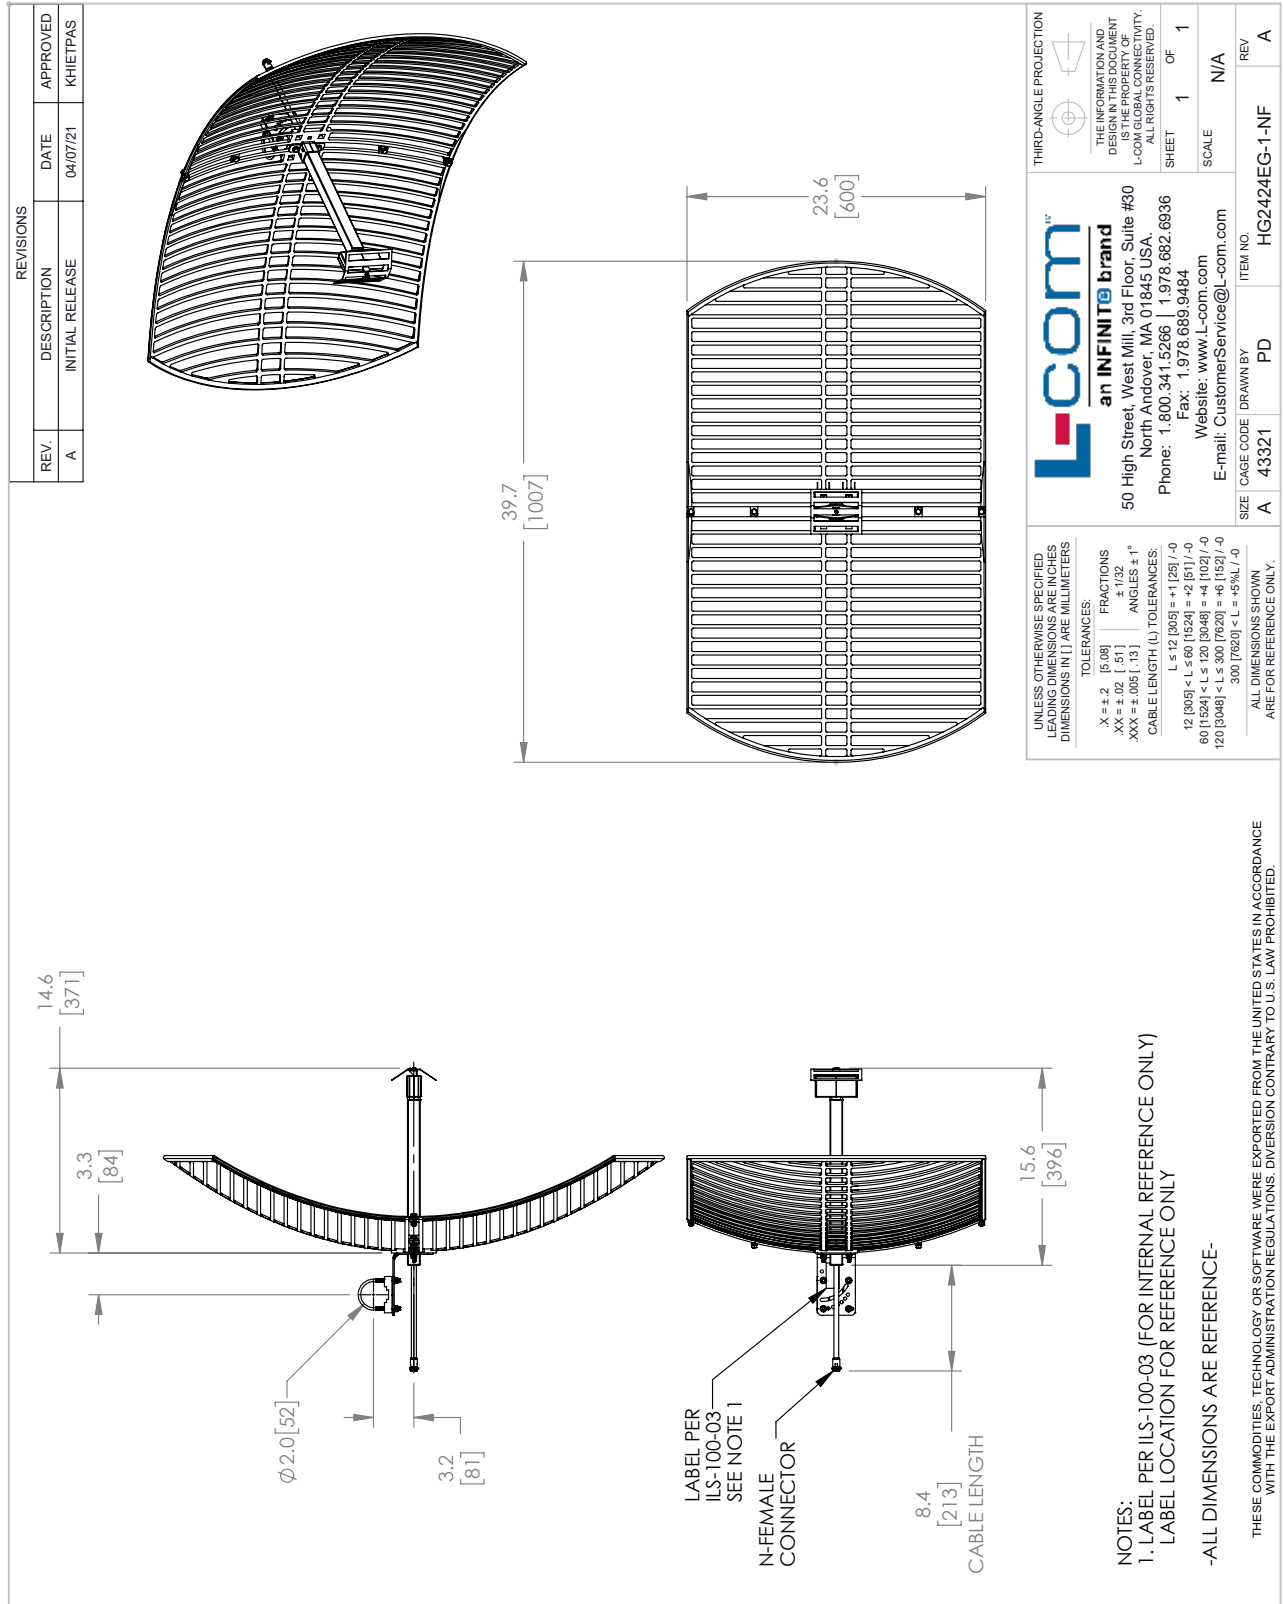

NOTES:
 1. LABEL PER ILS-100-03 (FOR INTERNAL REFERENCE ONLY)
 LABEL LOCATION FOR REFERENCE ONLY
 -ALL DIMENSIONS ARE REFERENCE-

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

T-Rev-D