


2.4 GHz WiFi Antenna

10 x 3.2 x 4.0 mm Ceramic Chip Antenna (On Ground type, Top surface ground removal area 10.80 x 6.25 mm).
Pulse Part Number: W3001

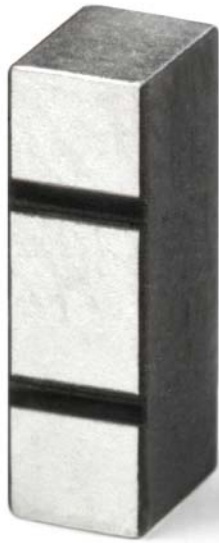

Features

- Omni directional radiation (Azimuthal plane)
- Low profile
- Compact size W x L x H (10 x 3.2 x 4 mm)
- Low weight (600 mg)
- Lead free materials
- Fully SMD compatible
- Lead free soldering compatible
- Tape and reel packing
- RoHS compliant product

Applications

- Bluetooth
- 2.4 GHz WLAN
- 2.4 GHz ISM Band System

Electrical specifications @ +25 °C

Note: Electrical characteristics depend on test board (GP) size and antenna positioning on GP and Ground Clearance area size.

WiFi 2.4 GHz

Typical performance

(Test board size 80 x 37 mm, PWB top surface ground removal area 10.80 x 6.25 mm, position 1 on PWB)

Frequency Range [MHz]	Max Gain [dBi]	Efficiency [%] / [dB]	Return loss min. [dB]	Impedance [Ω]	Operating Temperature [° C]
2400 – 2483.5	1.5 (Peak) 0.5 (Band edges)	75 /-1.25 (Peak) 60/-2.25 (Band edges)	-6	50	-45 to +85

Pulse Finland Oy

Takatie 6
90440 Kempele, Finland

Tel: +358 207 935 500

Fax: +358 207 935 501

www.pulseeng.com/antennas



2.4 GHz WiFi Antenna


10 x 3.2 x 4.0 mm Ceramic Chip Antenna (On Ground type, Top surface ground removal area 10.80 x 6.25 mm).
Pulse Part Number: W3001

Terminal Configuration and Dimensions

On Ground type, Top surface ground removal area 10.80 x 6.25 mm

Antenna features

No.	Terminal name	Terminal Dimensions
1	Feed / GND	1.5 x 2.75 mm
2	Feed / GND	1.5 x 2.75 mm

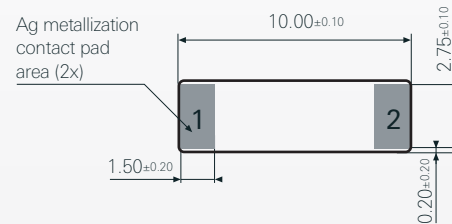

Antenna is symmetrical.

Either of terminals 1 or 2 can be feed / GND

Antenna PWB Layout Specifications

On Ground type, Top surface ground removal area 10.80 x 6.25 mm


Matching and tuning component values depend on application and surrounding mechanics / materials.

Feed line should be designed to match 50 Ω characteristic impedance, depending on PWB material and thickness.

Recommended test board layout for electrical characteristic measurement, test board outline size 80 x 37 mm.

PWB layout for W3001 Antenna


Note: All dimensions are in metric system.

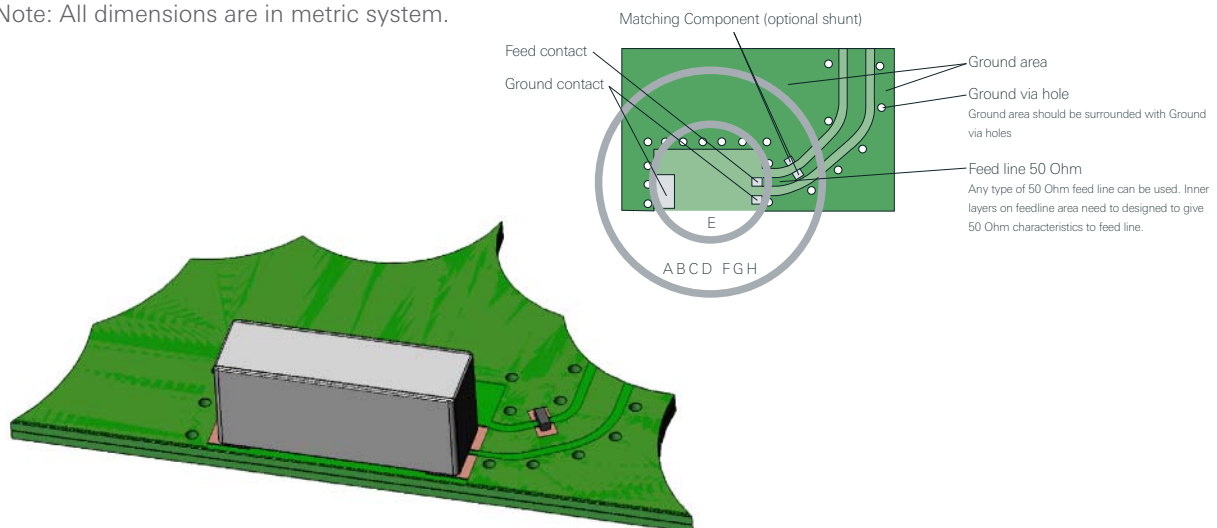


2.4 GHz WiFi Antenna

10 x 3.2 x 4.0 mm Ceramic Chip Antenna (On Ground type, Top surface ground removal area 10.80 x 6.25 mm).
Pulse Part Number: W3001

Metallization layers for W3001 Antenna

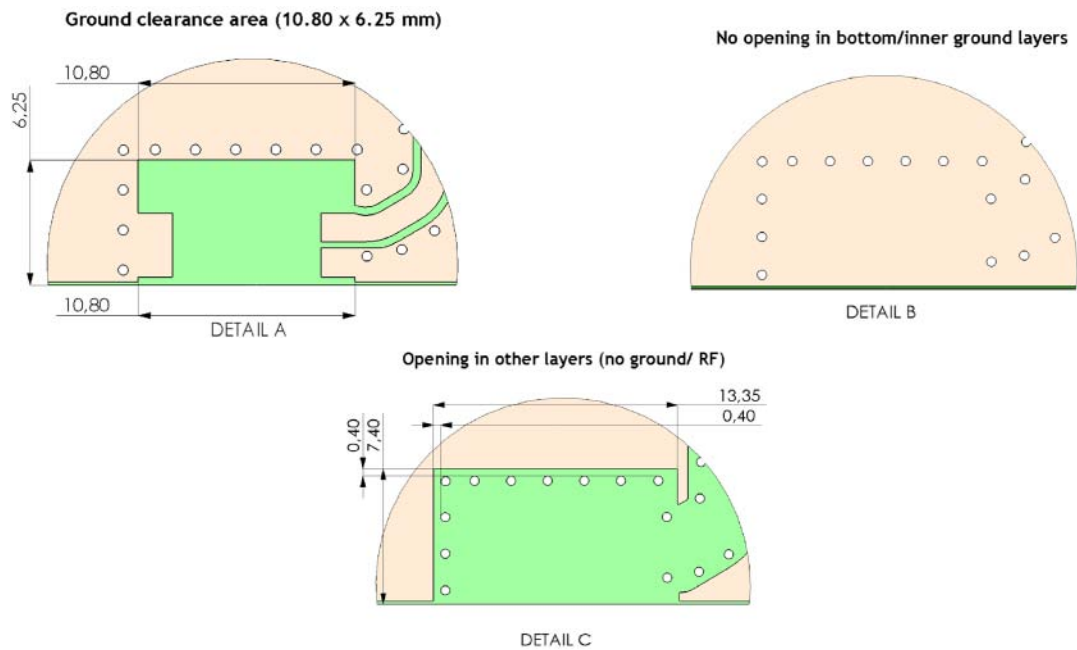


PWB pad dimensions and antenna position for W3001 Antenna

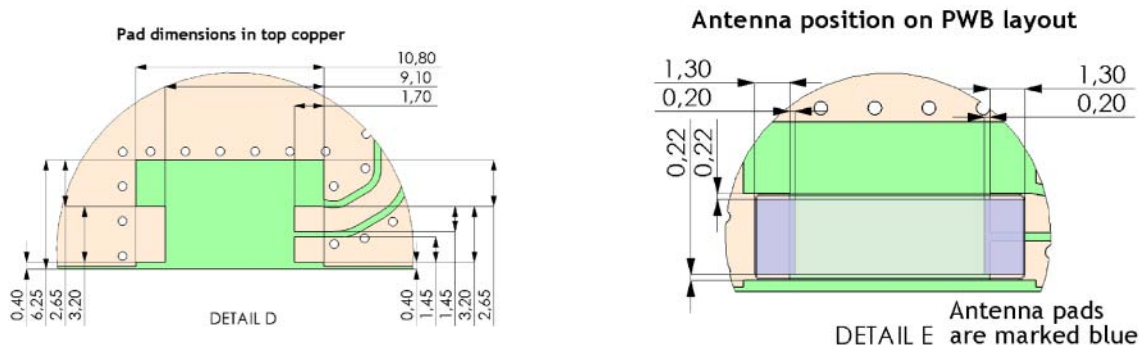



2.4 GHz WiFi Antenna

10 x 3.2 x 4.0 mm Ceramic Chip Antenna (On Ground type, Top surface ground removal area 10.80 x 6.25 mm).
Pulse Part Number: W3001

Typical ground via hole placement in PWB layout for W3001 Antenna

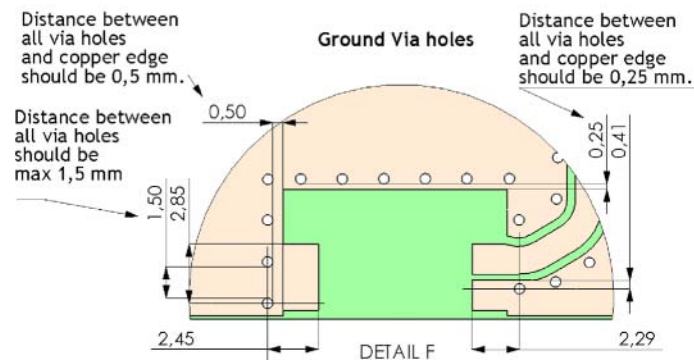

Solder resist opening and Paste stencil recommendation for W3001 Antenna

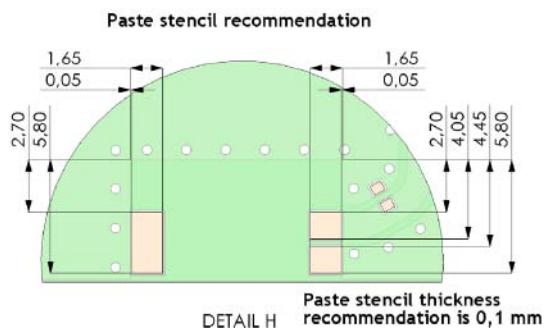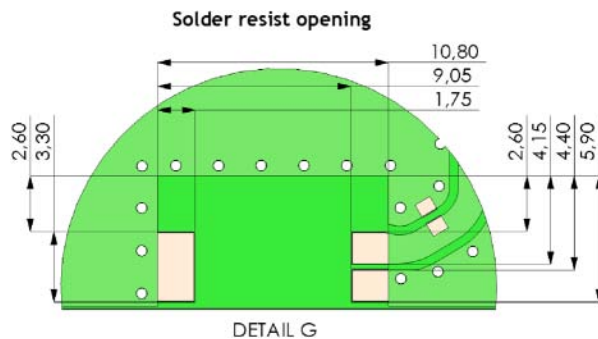


2.4 GHz WiFi Antenna

10 x 3.2 x 4.0 mm Ceramic Chip Antenna (On Ground type, Top surface ground removal area 10.80 x 6.25 mm).
Pulse Part Number: W3001

Recommended antenna position on PWB for W3001 Antenna

Our test PWB size is 37 x 80 mm, other sized boards can be used depending on customer device size (minimum 35 x 35 mm).

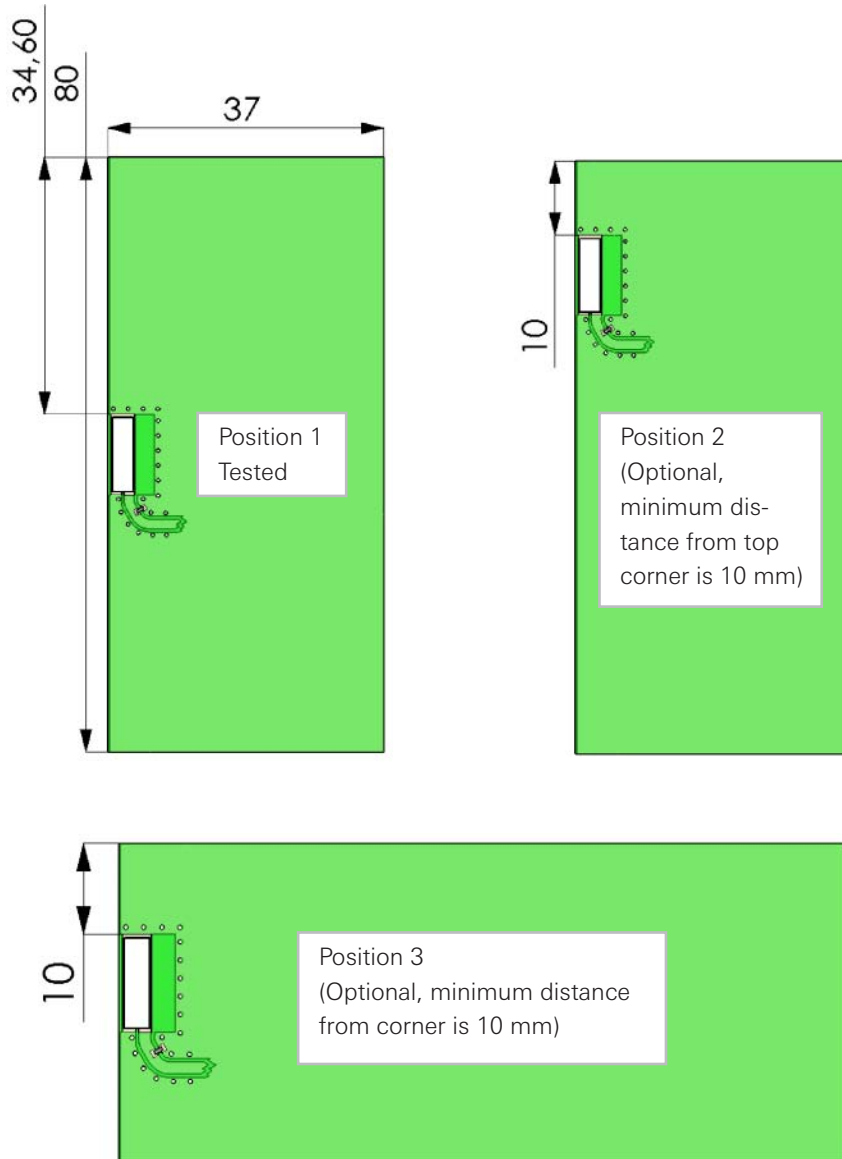

2.4 GHz WiFi Antenna

10 x 3.2 x 4.0 mm Ceramic Chip Antenna (On Ground type, Top surface ground removal area 10.80 x 6.25 mm).
Pulse Part Number: W3001

Typical Electrical Characteristics (T=25 °C)

Measured on the 80 x 37 mm test board with matching circuit (1.2 pF shunt matching capacitor on feed). Measured in antenna position 1 on PWB layout, see previous page.


2.4 GHz WiFi

11 Feb 2008 11:44:05

CH1Markers

1. -6.3601 dB 40 000 GHz
2. -6.2288 dB 48 300 GHz
3. -13.666 dB 440.000 000 MHz

CH1 S11&MLOG 5 dB/REF 0 dB

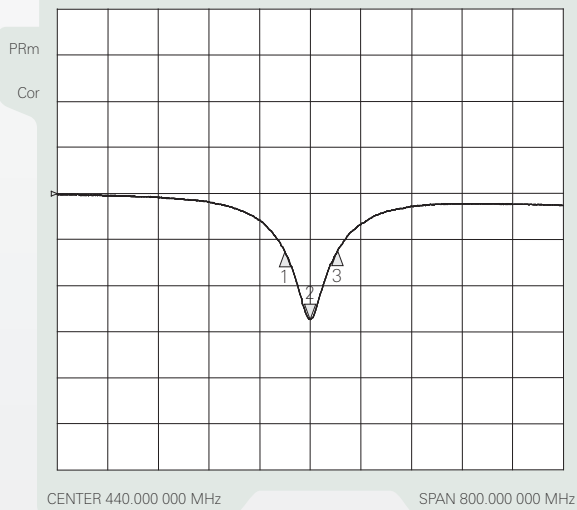


2.4 GHz WiFi

11 Feb 2008 11:47:36


1. 71.160 Ω 62.828 Ω 2. 40000 GHz
2. 60.660 Ω -21.344 Ω 3.0560 pF
2 440.000 000 MHz
3. 18.235 Ω -11.878 Ω 2.48300 GHz

CH1 S11&M 1 U FS

PRm
Del
Cor

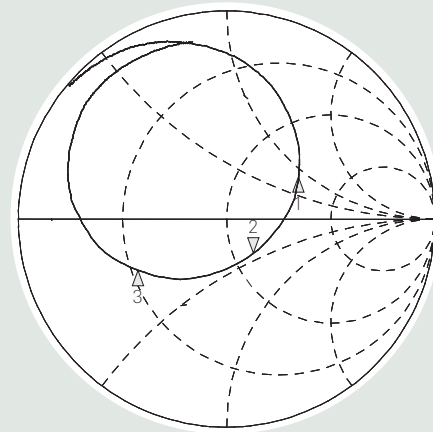

2.4 GHz WiFi

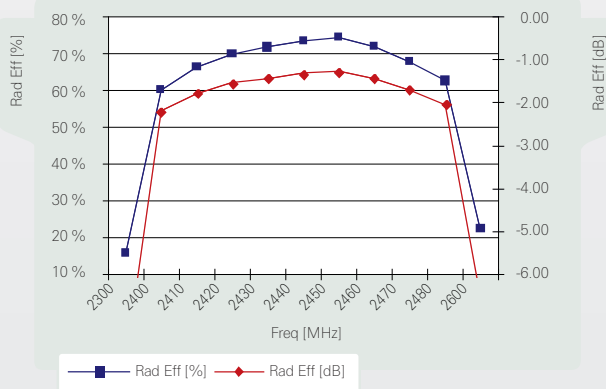

2.4 GHz WiFi



Pulse Finland Oy

Takatie 6
90440 Kempele, Finland

Tel: +358 207 935 500

Fax: +358 207 935 501

www.pulseeng.com/antennas







© 2008. All Rights Reserved.

2.4 GHz WiFi Antenna

10 x 3.2 x 4.0 mm Ceramic Chip Antenna (On Ground type, Top surface ground removal area 10.80 x 6.25 mm).
Pulse Part Number: W3001

Typical Free Space Radiation Patterns

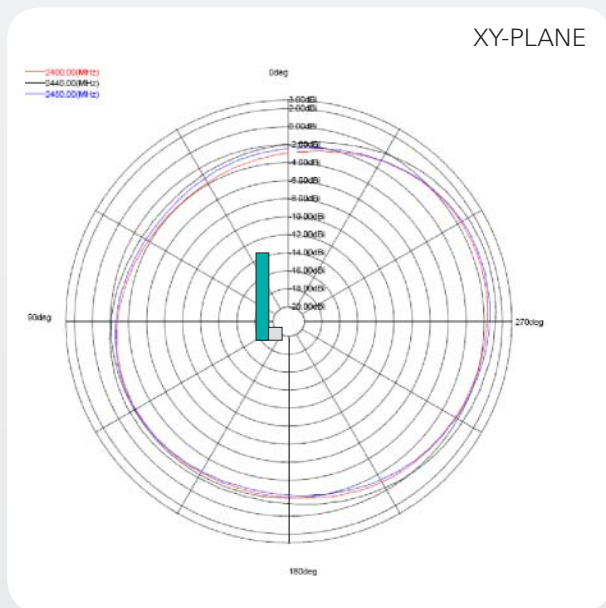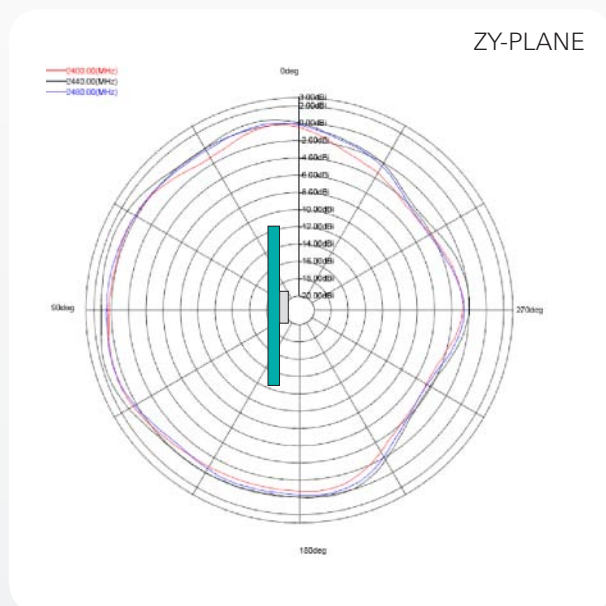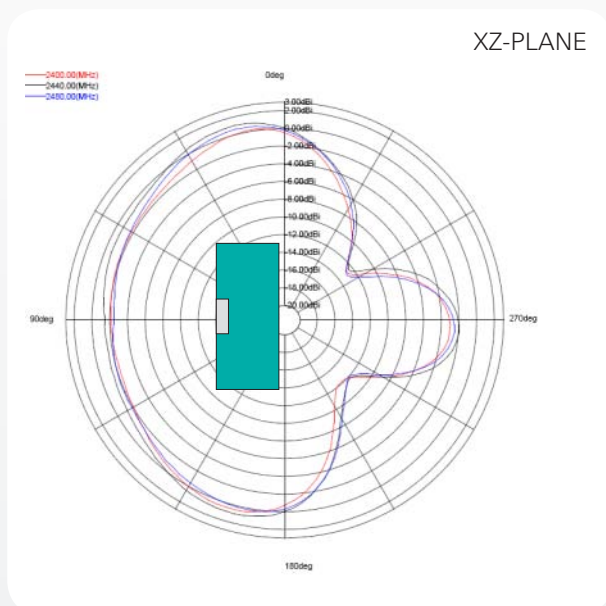

Pulse Finland Oy

Takatie 6
90440 Kempele, Finland
Tel: +358 207 935 500
Fax: +358 207 935 501

www.pulseeng.com/antennas




© 2008. All Rights Reserved.

2.4 GHz WiFi Antenna

10 x 3.2 x 4.0 mm Ceramic Chip Antenna (On Ground type, Top surface ground removal area 10.80 x 6.25 mm).
Pulse Part Number: W3001

Packing Form

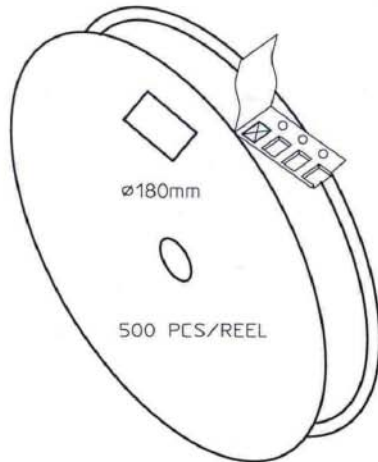


CARRIER TAPE H85-00158
width=24,00 depth=4.15
COVER TAPE H85-00159
width=21.20

LENGTH OF TAPE:

- Leader section: min 350 mm before component section
- Trailer section: min 40 mm after component section.


Empty part cavities at leader and trailer section of the tape must be sealed with top cover tape.



BOX H85-00128 1 pcs
(182x182x125)
- LABEL 1 pcs/BOX
REEL H85-00160 4 pcs
(D180, W28)
- REEL LABEL 1 pcs/REEL

MATERIAL

HANDLINGS

		RATIO	DRWN	160107 PeHa	H	
			DGNER		G	
			CHKD		F	
			APPRD		E	
PRODUCT			APPRD BY		D	
H90-OY800-F01P01					C	
DENOMINATION					B	
PACKING FORM					A	
			VERSION		MOD/DATE/NAME	

Pulse Finland Oy


Takatie 6
90440 Kempele, Finland
Tel: +358 207 935 500
Fax: +358 207 935 501
www.pulseeng.com/antennas



2.4 GHz WiFi Antenna

10 x 3.2 x 4.0 mm Ceramic Chip Antenna (On Ground type, Top surface ground removal area 10.80 x 6.25 mm).
Pulse Part Number: W3001

Mechanical Outline

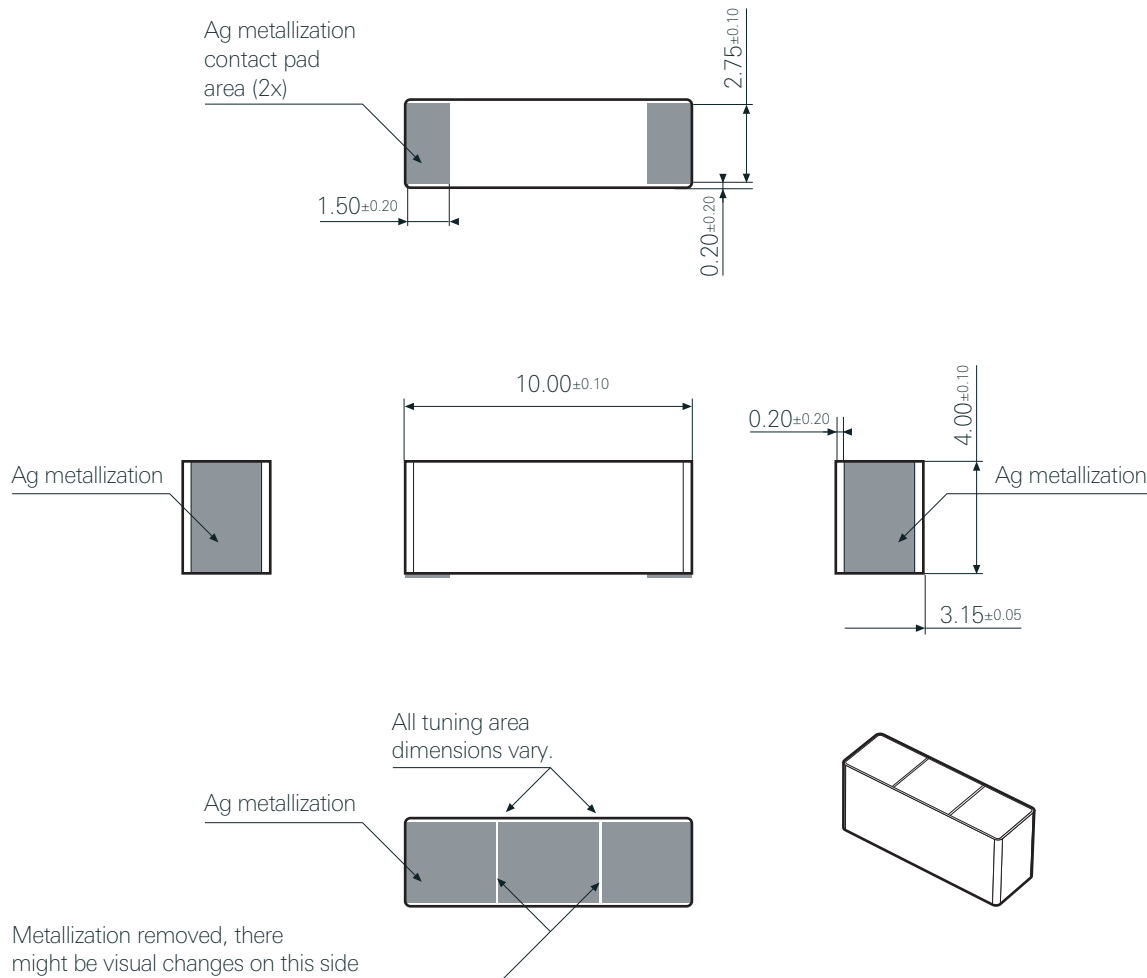

Pulse Finland Oy

Takatie 6
90440 Kempele, Finland
Tel: +358 207 935 500
Fax: +358 207 935 501

www.pulseeng.com/antennas