

# Switch-mode Power Rectifier

## MBR2045CTG, MBRF2045CTG

### Features and Benefits

- Low Forward Voltage
- Low Power Loss / High Efficiency
- High Surge Capacity
- 175°C Operating Junction Temperature
- 20 A Total (10 A Per Diode Leg)
- These Devices are Pb-Free and are RoHS Compliant

### Applications

- Power Supply – Output Rectification
- Power Management
- Instrumentation

### Mechanical Characteristics



- Case: Epoxy, Molded
- Epoxy Meets UL 94, V-0 @ 0.125 in
- Weight: 1.9 Grams (Approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes:  
260°C Max. for 10 Seconds
- ESD Rating: Human Body Model = 3B  
Machine Model = C




**ON Semiconductor®**

[www.onsemi.com](http://www.onsemi.com)

## SCHOTTKY BARRIER RECTIFIER 20 AMPERES, 45 VOLTS



**TO-220AB  
CASE 221A  
STYLE 6**



**TO-220  
FULLPAK™  
CASE 221D**


### DEVICE MARKING INFORMATION

See general marking information in the device marking section on page 2 of this data sheet.

### ORDERING INFORMATION

See detailed ordering and shipping information on page 3 of this data sheet.

## MBR2045CTG, MBRF2045CTG

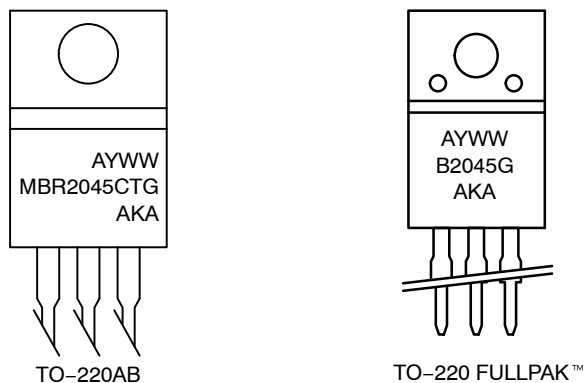

A = Assembly Location  
 Y = Year  
 WW = Work Week  
 G = Pb-Free Package  
 AKA = Diode Polarity

Figure 1. Marking Diagrams

### MAXIMUM RATINGS

| Rating                                                                                                      | Symbol                          | Value       | Unit             |
|-------------------------------------------------------------------------------------------------------------|---------------------------------|-------------|------------------|
| Peak Repetitive Reverse Voltage<br>Working Peak Reverse Voltage<br>DC Blocking Voltage                      | $V_{RRM}$<br>$V_{RWM}$<br>$V_R$ | 45          | V                |
| Average Rectified Forward Current<br>Per Device<br>Per Diode ( $T_C = 165^\circ\text{C}$ )                  | $I_{F(AV)}$                     | 20<br>10    | A                |
| Peak Repetitive Forward Current<br>per Diode Leg (Square Wave, 20 kHz, $T_C = 163^\circ\text{C}$ )          | $I_{FRM}$                       | 20          | A                |
| Non-Repetitive Peak Surge Current<br>(Surge Applied at Rated Load Conditions Halfwave, Single Phase, 60 Hz) | $I_{FSM}$                       | 150         | A                |
| Peak Repetitive Reverse Surge Current (2.0 $\mu\text{s}$ , 1.0 kHz)<br>See Figure 13                        | $I_{RRM}$                       | 1.0         | A                |
| Storage Temperature Range                                                                                   | $T_{stg}$                       | -65 to +175 | $^\circ\text{C}$ |
| Operating Junction Temperature (Note 1)                                                                     | $T_J$                           | -65 to +175 | $^\circ\text{C}$ |
| Voltage Rate of Change (Rated $V_R$ )                                                                       | $dv/dt$                         | 10,000      | V/ $\mu\text{s}$ |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. The heat generated must be less than the thermal conductivity from Junction-to-Ambient:  $dP_D/dT_J < 1/R_{\theta JA}$ .

### THERMAL CHARACTERISTICS

| Characteristic                             | Symbol          | Value | Unit                      |
|--------------------------------------------|-----------------|-------|---------------------------|
| Maximum Thermal Resistance<br>(MBR2045CTG) | $R_{\theta JC}$ | 2.0   | $^\circ\text{C}/\text{W}$ |
|                                            | $R_{\theta JA}$ | 60    |                           |
| (MBRF2045CTG)                              | $R_{\theta JC}$ | 4.75  |                           |
|                                            | $R_{\theta JA}$ | 75    |                           |

# MBR2045CTG, MBRF2045CTG

## ELECTRICAL CHARACTERISTICS

| Characteristic                                                                                                                                                                                             | Symbol | Min         | Typ                  | Max                  | Unit |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-------------|----------------------|----------------------|------|
| Instantaneous Forward Voltage (Note 2)<br>( $i_F = 10\text{ A}$ , $T_J = 125^\circ\text{C}$ )<br>( $i_F = 20\text{ A}$ , $T_J = 125^\circ\text{C}$ )<br>( $i_F = 20\text{ A}$ , $T_J = 25^\circ\text{C}$ ) | $V_F$  | –<br>–<br>– | 0.50<br>0.67<br>0.71 | 0.57<br>0.72<br>0.84 | V    |
| Instantaneous Reverse Current (Note 2)<br>(Rated dc Voltage, $T_J = 125^\circ\text{C}$ )<br>(Rated dc Voltage, $T_J = 25^\circ\text{C}$ )                                                                  | $i_R$  | –<br>–      | 10.4<br>0.02         | 15<br>0.1            | mA   |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

2. Pulse Test: Pulse Width = 300  $\mu\text{s}$ , Duty Cycle  $\leq 2.0\%$ .

## ORDERING INFORMATION

| Device Order Number | Package Type          | Shipping <sup>†</sup> |
|---------------------|-----------------------|-----------------------|
| MBR2045CTG          | TO-220<br>(Pb-Free)   | 50 Units / Rail       |
| MBRF2045CTG         | TO-220FP<br>(Pb-Free) | 50 Units / Rail       |

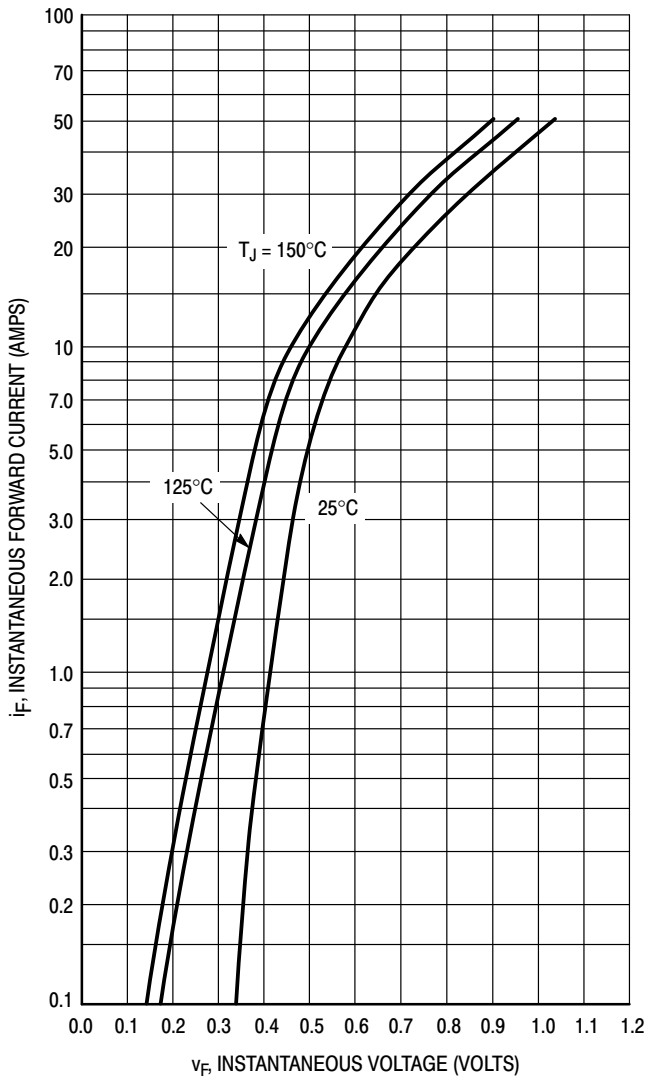


Figure 1. Typical Forward Voltage

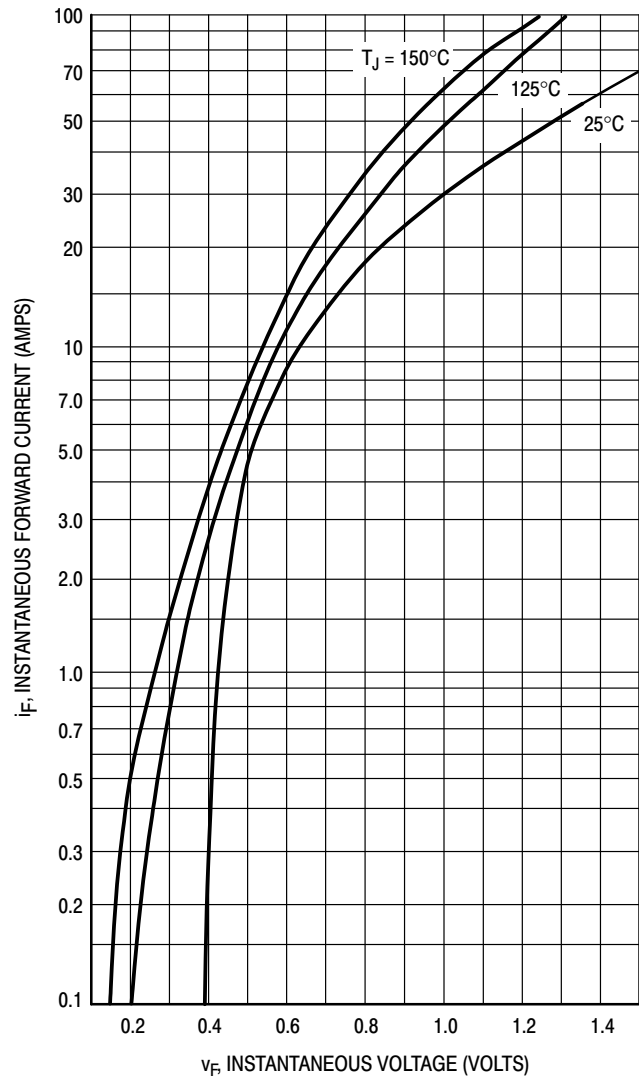


Figure 2. Maximum Forward Voltage

# MBR2045CTG, MBRF2045CTG

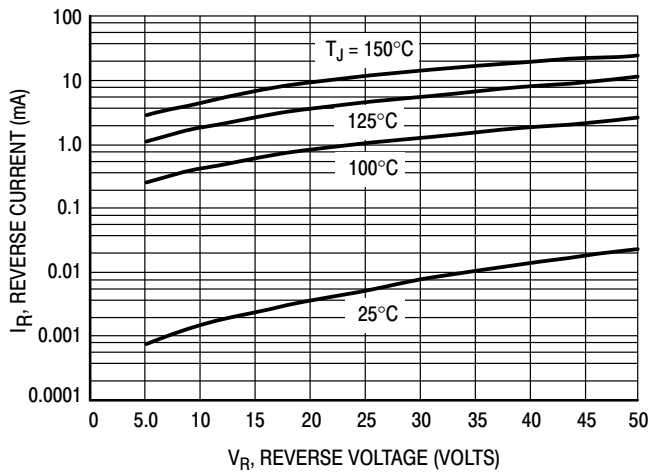


Figure 3. Typical Reverse Current

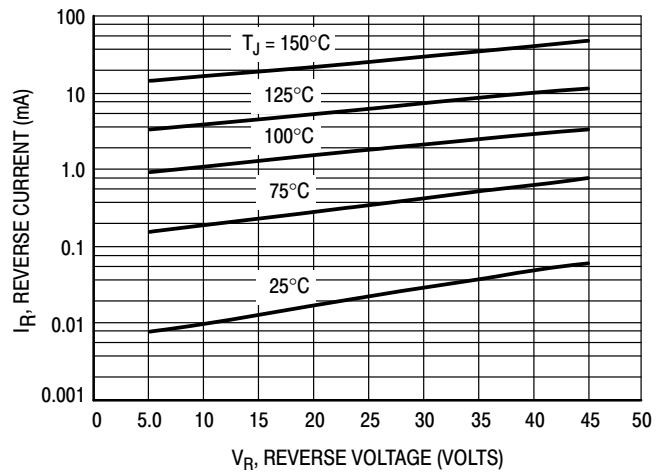


Figure 4. Maximum Reverse Current

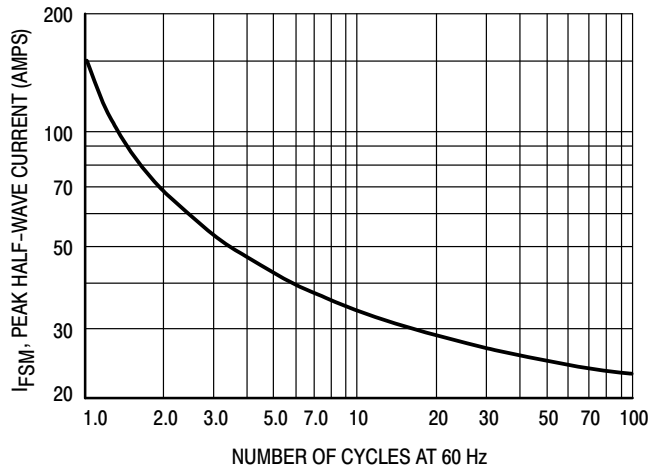


Figure 5. Maximum Surge Capability

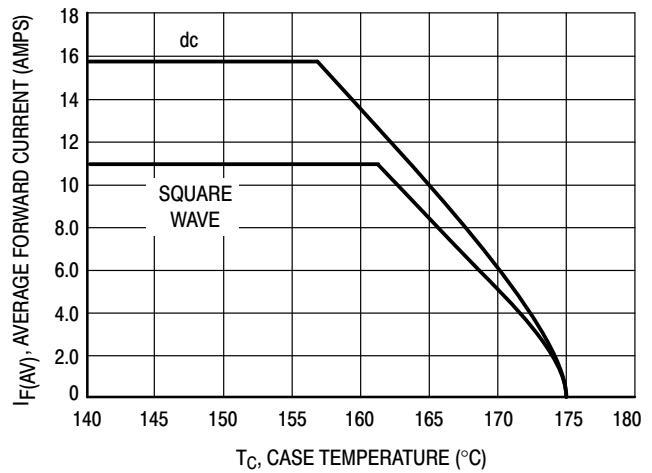


Figure 6. Current Derating, Case, Per Leg

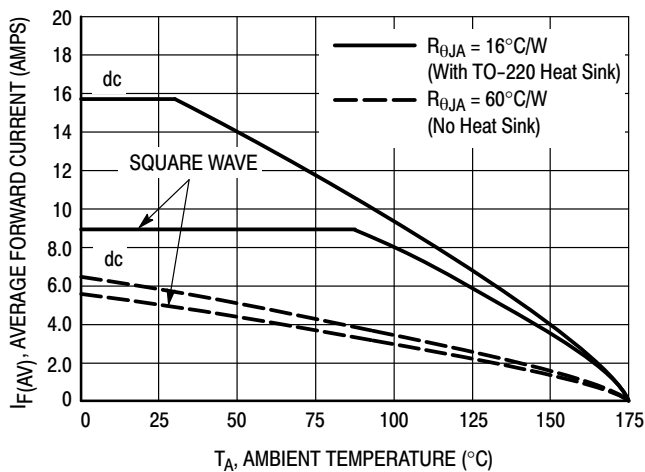


Figure 7. Current Derating, Ambient, Per Leg

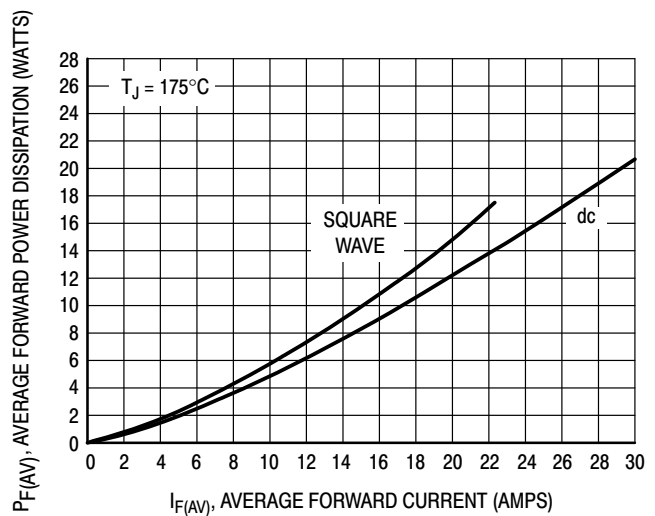


Figure 8. Forward Power Dissipation

# MBR2045CTG, MBRF2045CTG

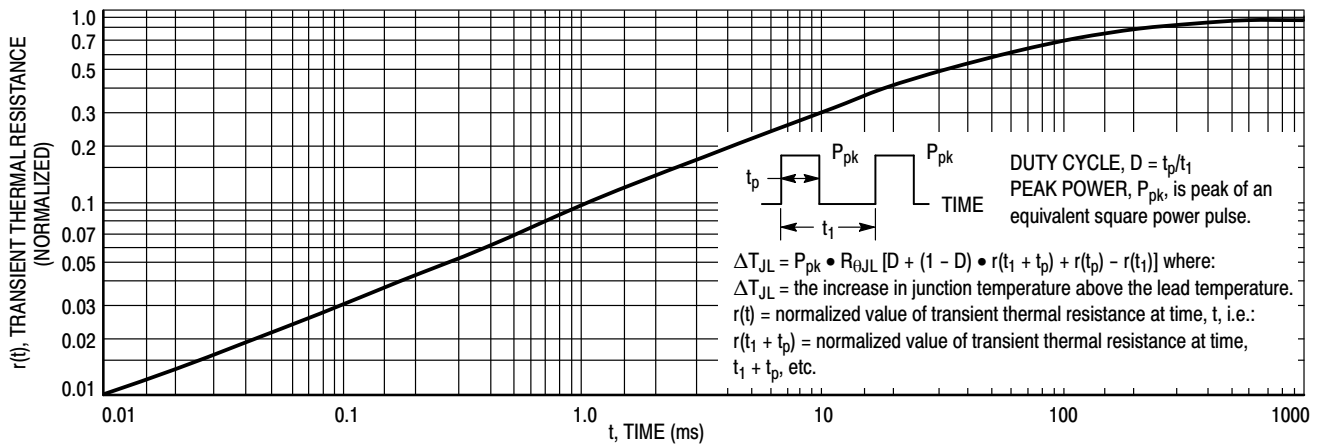


Figure 9. Thermal Response for MBR2045CT

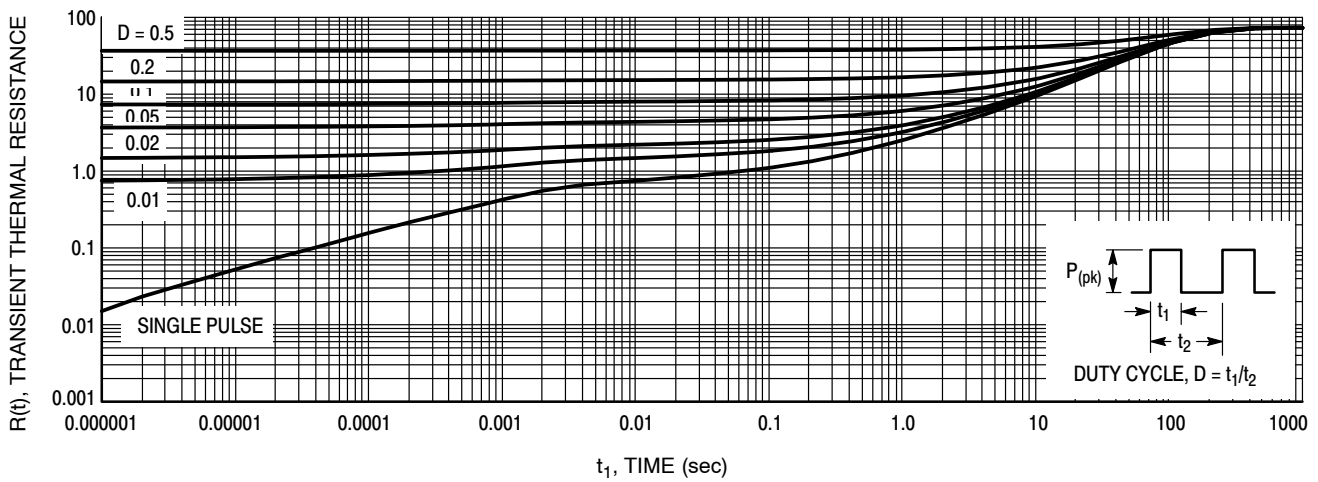


Figure 10. Thermal Response Junction-to-Ambient for MBRF2045CT


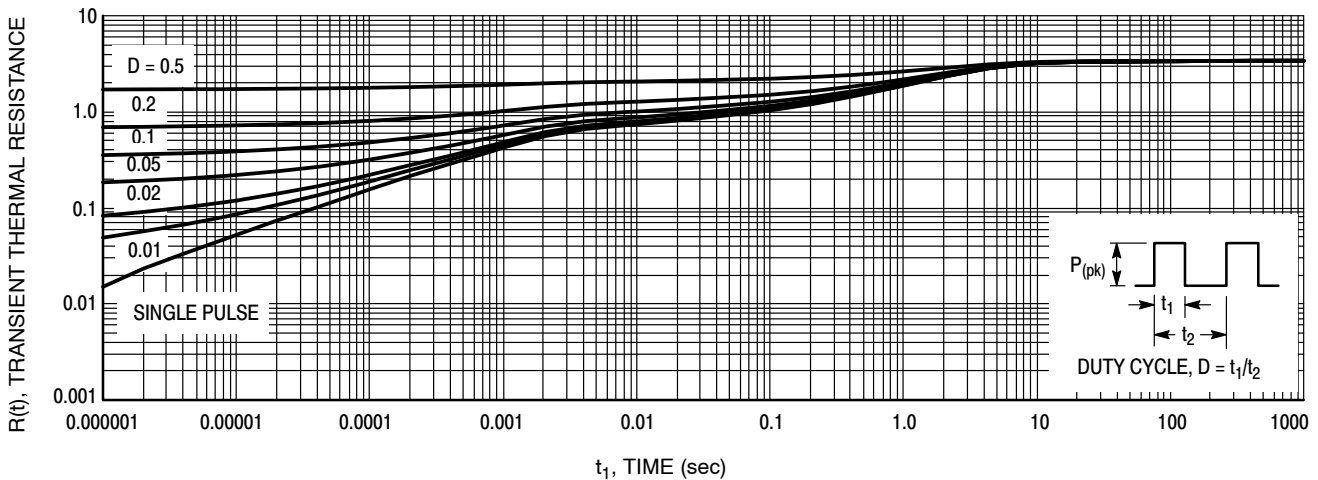


Figure 11. Thermal Response Junction-to-Case for MBRF2045CT


## HIGH FREQUENCY OPERATION

Since current flow in a Schottky rectifier is the result of majority carrier conduction, it is not subject to junction diode forward and reverse recovery transients due to minority carrier injection and stored charge. Satisfactory circuit analysis work may be performed by using a model consisting of an ideal diode in parallel with a variable capacitance. (See Figure 12.)

Rectification efficiency measurements show that operation will be satisfactory up to several megahertz. For example, relative waveform rectification efficiency is approximately 70 percent at 2.0 MHz, e.g., the ratio of dc power to RMS power in the load is 0.28 at this frequency, whereas perfect rectification would yield 0.406 for sine wave inputs. However, in contrast to ordinary junction diodes, the loss in waveform efficiency is not indicative of power loss; it is simply a result of reverse current flow through the diode capacitance, which lowers the dc output voltage.

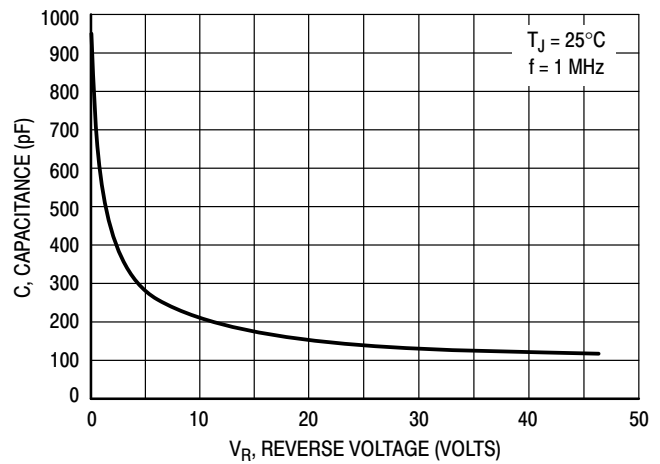


**Figure 12. Typical Capacitance**

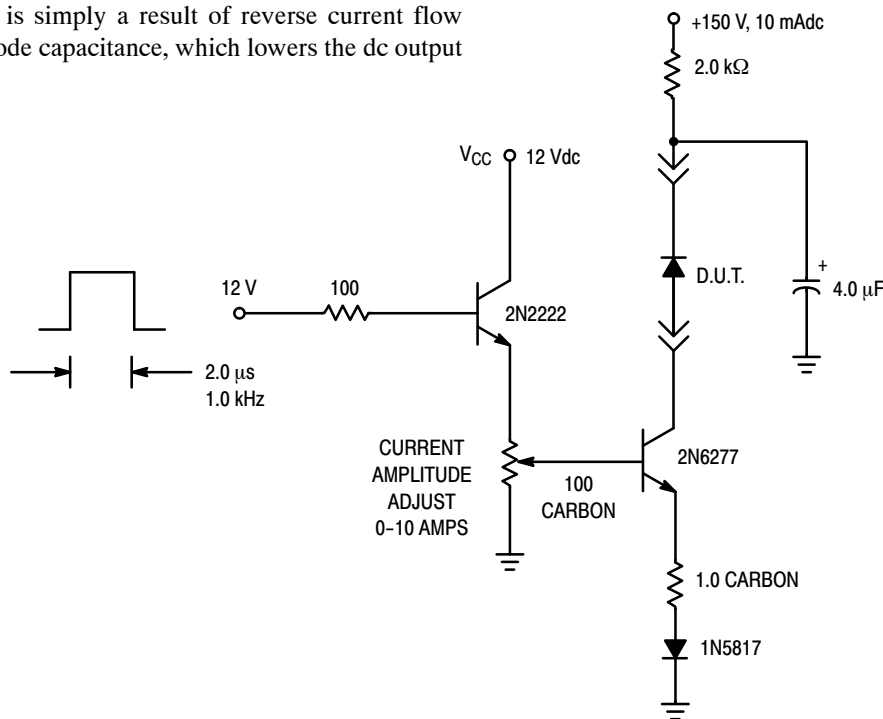


**Figure 13. Test Circuit for dv/dt and Reverse Surge Current**

# MECHANICAL CASE OUTLINE PACKAGE DIMENSIONS



## TO-220 CASE 221A ISSUE AK

DATE 13 JAN 2022

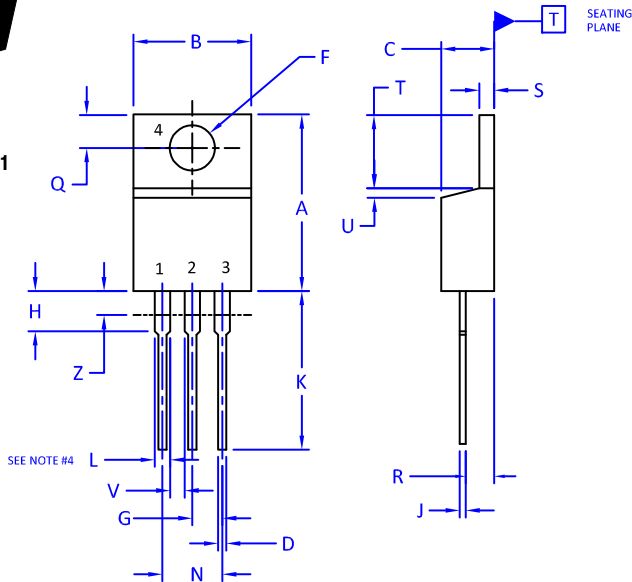

### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 2009.
2. CONTROLLING DIMENSION: INCHES
3. DIMENSION Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.
4. MAX WIDTH FOR F102 DEVICE = 1.35MM

| DIM | INCHES |       | MILLIMETERS |       |
|-----|--------|-------|-------------|-------|
|     | MIN.   | MAX.  | MIN.        | MAX.  |
| A   | 0.570  | 0.620 | 14.48       | 15.75 |
| B   | 0.380  | 0.415 | 9.66        | 10.53 |
| C   | 0.160  | 0.190 | 4.07        | 4.83  |
| D   | 0.025  | 0.038 | 0.64        | 0.96  |
| F   | 0.142  | 0.161 | 3.60        | 4.09  |
| G   | 0.095  | 0.105 | 2.42        | 2.66  |
| H   | 0.110  | 0.161 | 2.80        | 4.10  |
| J   | 0.014  | 0.024 | 0.36        | 0.61  |
| K   | 0.500  | 0.562 | 12.70       | 14.27 |
| L   | 0.045  | 0.060 | 1.15        | 1.52  |
| N   | 0.190  | 0.210 | 4.83        | 5.33  |
| Q   | 0.100  | 0.120 | 2.54        | 3.04  |
| R   | 0.080  | 0.110 | 2.04        | 2.79  |
| S   | 0.045  | 0.055 | 1.15        | 1.41  |
| T   | 0.235  | 0.255 | 5.97        | 6.47  |
| U   | 0.000  | 0.050 | 0.00        | 1.27  |
| V   | 0.045  | ----  | 1.15        | ---   |
| Z   | ----   | 0.080 | ---         | 2.04  |

STYLE 1:  
PIN 1. BASE  
2. COLLECTOR  
3. EMITTER  
4. COLLECTOR

STYLE 2:  
PIN 1. BASE  
2. EMITTER  
3. COLLECTOR  
4. EMITTER

STYLE 3:  
PIN 1. CATHODE  
2. ANODE  
3. GATE  
4. ANODE

STYLE 4:  
PIN 1. MAIN TERMINAL 1  
2. MAIN TERMINAL 2  
3. GATE  
4. MAIN TERMINAL 2

STYLE 5:  
PIN 1. GATE  
2. DRAIN  
3. SOURCE  
4. DRAIN

STYLE 6:  
PIN 1. ANODE  
2. CATHODE  
3. ANODE  
4. CATHODE

STYLE 7:  
PIN 1. CATHODE  
2. ANODE  
3. CATHODE  
4. ANODE

STYLE 8:  
PIN 1. CATHODE  
2. ANODE  
3. EXTERNAL TRIP/DELAY  
4. ANODE

STYLE 9:  
PIN 1. GATE  
2. COLLECTOR  
3. EMITTER  
4. COLLECTOR

STYLE 10:  
PIN 1. GATE  
2. SOURCE  
3. DRAIN  
4. SOURCE

STYLE 11:  
PIN 1. DRAIN  
2. SOURCE  
3. GATE  
4. SOURCE


STYLE 12:  
PIN 1. MAIN TERMINAL 1  
2. MAIN TERMINAL 2  
3. GATE  
4. NOT CONNECTED

|                  |             |                                                                                                                                                                                     |
|------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DOCUMENT NUMBER: | 98ASB42148B | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | TO-220      | PAGE 1 OF 1                                                                                                                                                                         |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

# MECHANICAL CASE OUTLINE PACKAGE DIMENSIONS


ON Semiconductor®



SCALE 1:1

## TO-220 FULLPAK CASE 221D-03 ISSUE K

DATE 27 FEB 2009

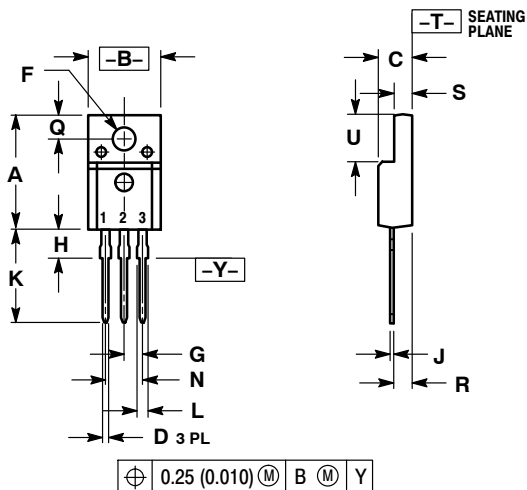


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH
  3. 221D-01 THRU 221D-02 OBSOLETE, NEW STANDARD 221D-03.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.617     | 0.635 | 15.67       | 16.12 |
| B   | 0.392     | 0.419 | 9.96        | 10.63 |
| C   | 0.177     | 0.193 | 4.50        | 4.90  |
| D   | 0.024     | 0.039 | 0.60        | 1.00  |
| F   | 0.116     | 0.129 | 2.95        | 3.28  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| H   | 0.118     | 0.135 | 3.00        | 3.43  |
| J   | 0.018     | 0.025 | 0.45        | 0.63  |
| K   | 0.503     | 0.541 | 12.78       | 13.73 |
| L   | 0.048     | 0.058 | 1.23        | 1.47  |
| N   | 0.200 BSC |       | 5.08 BSC    |       |
| Q   | 0.122     | 0.138 | 3.10        | 3.50  |
| R   | 0.099     | 0.117 | 2.51        | 2.96  |
| S   | 0.092     | 0.113 | 2.34        | 2.87  |
| U   | 0.239     | 0.271 | 6.06        | 6.88  |

## MARKING DIAGRAMS

- STYLE 1:  
PIN 1. GATE  
2. DRAIN  
3. SOURCE
- STYLE 2:  
PIN 1. BASE  
2. COLLECTOR  
3. EMITTER
- STYLE 3:  
PIN 1. ANODE  
2. CATHODE  
3. ANODE
- STYLE 4:  
PIN 1. CATHODE  
2. ANODE  
3. CATHODE
- STYLE 5:  
PIN 1. CATHODE  
2. ANODE  
3. GATE
- STYLE 6:  
PIN 1. MT 1  
2. MT 2  
3. GATE



Bipolar



Rectifier

xxxxxx = Specific Device Code  
G = Pb-Free Package  
A = Assembly Location  
Y = Year  
WW = Work Week

A = Assembly Location  
Y = Year  
WW = Work Week  
xxxxxx = Device Code  
G = Pb-Free Package  
AKA = Polarity Designator

|                  |                |                                                                                                                                                                                     |
|------------------|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DOCUMENT NUMBER: | 98ASB42514B    | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | TO-220 FULLPAK | PAGE 1 OF 1                                                                                                                                                                         |

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Email Requests to: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**onsemi Website:** [www.onsemi.com](http://www.onsemi.com)

### TECHNICAL SUPPORT

**North American Technical Support:**

Voice Mail: 1 800-282-9855 Toll Free USA/Canada

Phone: 011 421 33 790 2910

**Europe, Middle East and Africa Technical Support:**

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative