


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/6/15	D.GRIFFIN

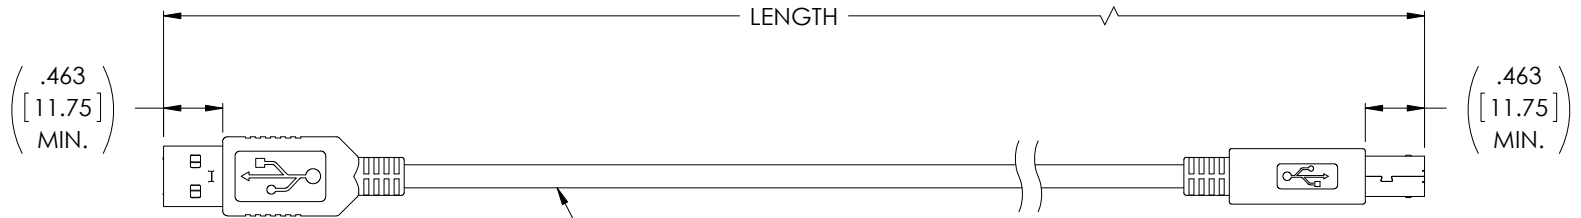

ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR
TWO 28AWG STRANDED TINNED COPPER CONDUCTORS
OVERALL BRAIDED SHIELD WITH DRAIN WIRE
PVC OUTER JACKET, DARK GRAY (PANTONE 445C)

PIN 1
"P1"
USB SERIES "A" PLUG
CONTACTS: GOLD FLASH

PIN 1
"P2"
USB SERIES "B" PLUG
CONTACTS: GOLD FLASH

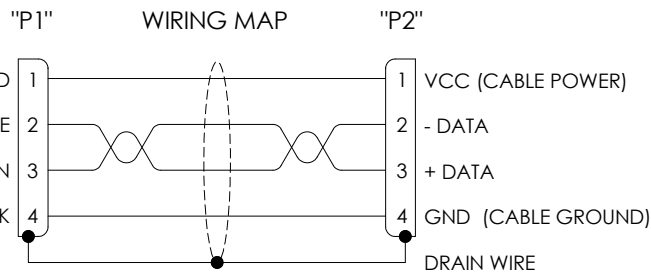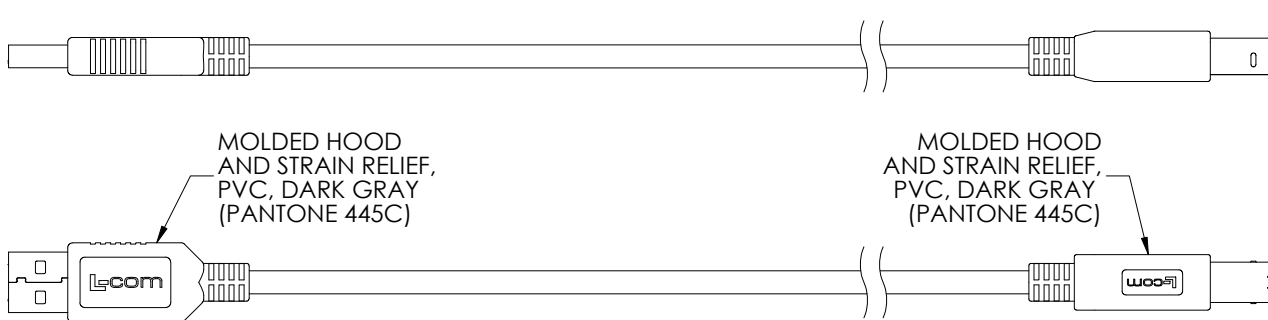

MODEL NUMBER	LENGTH METERS [FEET]
CGU2AB-03M	0.3 [.98]
CGU2AB-05M	0.5 [1.64]
CGU2AB-1M	1.0 [3.28]
CGU2AB-2M	2.0 [6.56]
CGU2AB-3M	3.0 [9.84]
CGU2AB-5M	5.0 [16.41]

NOTES:

- CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
- CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [13] PROJECTION 	APPROVALS DRAWN BY D. DESJARDIN CHECKED BY S. SMITH APPROVED BY S. SMITH	DATE 7/23/15 8/26/15 8/26/15	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845 CATEGORY USB PRODUCT DESCRIPTION CBL,USB 2.0 TYPE A/B
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	
	SIZE A	FSCM NO. 43321	
	SCALE: NONE	CAD FILE: CGU2AB.SLDRW	
DWG. NO. CGU2AB		REV. A	SHEET 1 OF 1