



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
J	ECN 5848: ADDED LENGTHS 03 M, 075 M, NEW FORMAT, PACKAGING NOTE	12/1/11	D.FRISIELLO
K	ECN5915: REVISED END VIEW OF USB TYPE A MALE	01/10/12	DFP
L	ECN6237: ADDED CONTACT PLATING NOTE, UPDATED FORMAT.	09/18/12	DFP
L	ECN 99999: UPDATE TO CORRECT ORIENTATION OF LOGO -ON MINI B END	1/13/16	S.LI

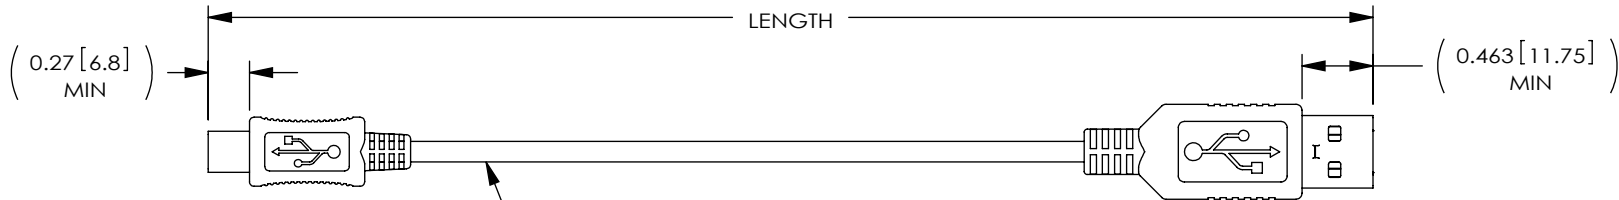


ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR
TWO 28AWG STRANDED TINNED COPPER CONDUCTORS
OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN WIRE
PLUS TINNED COPPER BRAIDED SHIELD.
PVC OUTER JACKET, BLACK




"P1"
SERIES "B" MINI
5 PIN PLUG
CONTACTS: 30 μ INCHES
GOLD PLATING

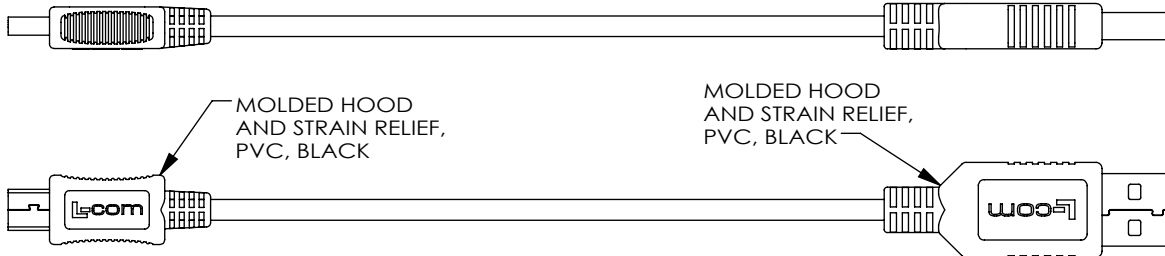

MOLDED HOOD
AND STRAIN RELIEF,
PVC, BLACK

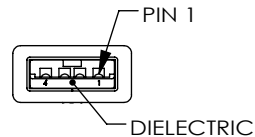

"P2"
USB SERIES "A" PLUG
CONTACTS: 30 μ INCHES
GOLD PLATING

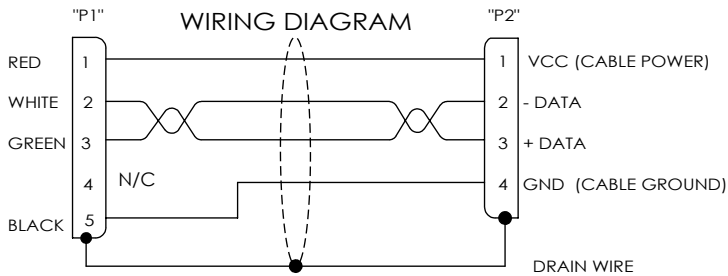

MODEL NO.	LENGTH METERS [FEET]
CSMUAMB5-03M	0.3 [.98]
CSMUAMB5-05M	0.5 [1.64]
CSMUAMB5-075M	0.75 [2.46]
CSMUAMB5-1M	1.0 [3.28]
CSMUAMB5-2M	2.0 [6.56]
CSMUAMB5-3M	3.0 [9.84]

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 > 12 [305] ≤ 60 [1524] = +2 [51] / -0 > 60 [1524] ≤ 120 [3048] = +4 [102] / -0 > 120 [3048] ≤ 300 [7620] = +6 [152] / -0 > 300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = $\pm .2$ [5.08] .XX = $\pm .02$ [.51] .XXX = $\pm .005$ [.13]	APPROVALS DRAWN BY T.CLARK CHECKED BY D.PARHAM APPROVED BY R.CARRICK	DATE 05/21/2002 05/27/2002 05/27/2002	L-com Global Connectivity 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	CATEGORY USB	
PROJECTION 	COLOR VARIATIONS MAY OCCUR	PRODUCT DESCRIPTION CABLE, USB-A/MINI-B 5POS	SIZE A
		FSCM NO. 43321	DWG. NO. CSMUAMB5
		SCALE: NONE	CAD FILE: CSMUAMB5.SLDDRW
			SHEET 1 OF 1